

AXIS Network Document Station

Quick Installation Guide

These instructions are for the installation of the AXIS Network Document Station i.e. the AXIS 70U and the Fujitsu fi-4010CU scanner.

Additional information

- AXIS 70U - please refer to the *AXIS 70/70U User's Guide* included in the AXIS 70U package
- Scanner - please refer to the *Fujitsu fi-4010 Image Scanner Operator's Guide* included in the scanner package

Unpack and check the package contents

AXIS 70U package Confirm that the following items are included in the AXIS 70U package:

Hardware	Models
Network Document Server	AXIS 70U
Power Supply	AXIS PS-H -or- AXIS PS-F
Media	Title
CD-ROM	AXIS Network Product CD
Printed Materials	AXIS 70/70U User's Guide R1.0
	AXIS 70/70U Instruction Label
	AXIS 70/70U Keyboard Instruction Label

Fujitsu fi-4010CU scanner package

Hardware	Media	Title
Fujitsu fi-4010CU scanner	CD-ROM	Manual CD-ROM
USB cable		* (<i>Scanner driver CD-ROM</i>)
AC cable		* (<i>Application software CD-ROMs</i>)
AC adapter	Printed Materials	fi-4010CU Image Scanner Operator's Guide
ADF paper chute A		* (<i>fi-4010CU Quick Installation Guide</i>)
ADF paper chute B		
Document stopper		

* not included in the package as this material is not applicable to the AXIS Network Document Station

AXIS Network Document Station


Release the shipping lock on the scanner

1. Raise the scanner carefully upward so the bottom side of the scanner is facing you.
2. Slide the lock switch to “unlock” position to release the lock.



Assemble the scanner

1. Attach the **ADF paper chute A** to the ADF unit so that the side guide of the ADF paper chute faces up.
2. Attach the **ADF paper chute B** to the ADF paper chute A so that the flip out part of the ADF paper chute B faces up.
3. Insert the claws of the **document stopper** into the slots of the scanner. Slide the document stopper in the direction of the marked arrow, to fix the stopper.

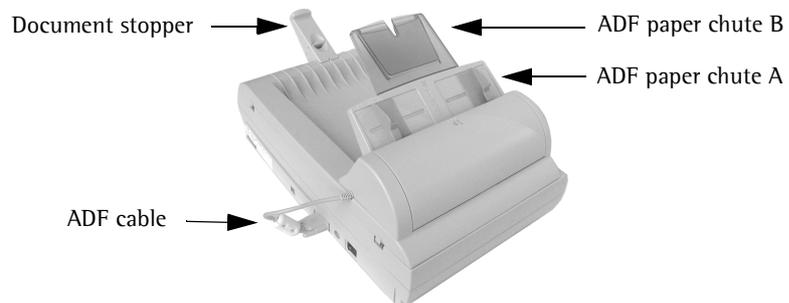

4. Connect the **ADF cable** to the ADF cable connector of the scanner, and fix the thumb screws of the ADF cable connector.

AXIS Network Document Station


Connect the AXIS 70U to the scanner

Caution! Check that the power supply included with your AXIS 70U is marked with the correct mains voltage for your country.



Note: Make sure that the external power supplies to the scanner and AXIS 70U are not connected. Connecting the power is the final step in the installation.

Insert the smaller connector of the USB cable to the USB connector on the back of the scanner and connect the other end of the USB cable to the USB connector on the AXIS 70U

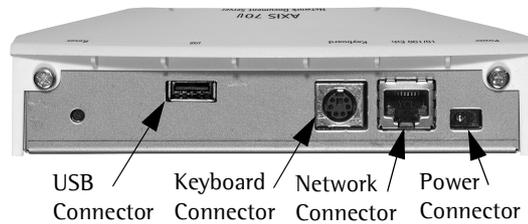

Note: You can connect a standard PC keyboard to the AXIS 70U. This allows you to enter temporary e-mail addresses at the scanner and to easily search long e-mail listings. Refer to the AXIS 70U Support page on the Axis web site at <http://www.axis.com> for a list of recommended keyboards.

AXIS Network Document Station

Connect the AXIS Network Document Station to the Network

1. Connect your AXIS 70U to the network. The AXIS 70U is designed for 10 Mbps Ethernet and 100 Mbps Fast Ethernet networks and connects to the network via a twisted pair category 5 cable (10baseT and 100baseTX).
2. Connect the external power supply to the scanner and switch it on with the power switch on the back panel.
3. Connect the external power supply to the AXIS 70U. The network indicator will flash during power up and self test.

Network Indicator

The tri-colored Network indicator flashes:

yellow	indicating network activity on a 10MB Ethernet network
green	indicating network activity on a 100MB Fast Ethernet network
red	indicating that the unit is not correctly connected to the network

The hardware installation is now complete. If you have a DHCP server on your network, the AXIS 70U will automatically receive an IP address.

For more information on how to set the IP address if you do not have a DHCP server on your network, and for further information about the AXIS 70U, please refer to the *AXIS 70/70U User's Guide* included in the AXIS 70U package.

Support Services

Should you require any technical assistance, please contact your Axis reseller. If your questions cannot be answered immediately, your Axis reseller will forward your queries through the appropriate channels to ensure a rapid response. For additional contact information, see the user documentation included in the package.

Note: You do not need to install the FUJITSU TWAIN32 Scanner Driver when installing the AXIS Network Document Station.

Every care has been taken in the preparation of this document; if you detect any inaccuracies or omissions, please inform us by contacting your local Axis office. AXIS Communications AB cannot be held responsible for any technical or typographical errors and reserves the right to make changes to the product and documentation without prior notice

Copyright© Axis Communications AB, 2002

Part No. 19739 R1.0