



User's Manual

AXIS 9010

Bluetooth™ Access Point

Mobile Access by Axis



AXIS[®]
COMMUNICATIONS

Table of Contents

Legal Notices	3
Quick Installation Procedure	6
Installing your AXIS 9010	6
Using your AXIS 9010	7
Accessing AXIS 9010 Web Interface	7
Preface	8
About Axis Communications	8
Other Axis Products	8
About this Manual	9
Product Overview	10
Package Contents	10
Physical Description	11
Indicators	12
Placing the AXIS 9010	13
<i>Bluetooth</i> Wireless Technology	14
AXIS 9010	15
AXIS 9010 IP Setting	16
AXIS 9010 Automatic IP Setting	16
AXIS 9010 Manual IP Setting	16
<i>Bluetooth</i> Client IP Setting	19
<i>Bluetooth</i> Client Automatic IP Setting	19
<i>Bluetooth</i> Client IP Setting within a Private Network (IP Masquerading)	19
<i>Bluetooth</i> Client Manual IP Setting	21
Security	22
Web Interface and FTP Security	22
<i>Bluetooth</i> Radio Link Security	22
Authentication	23
Monitoring	24
AXIS MIB	24
Default Settings	25
AXIS 9010 Web Interface	28
Accessing the AXIS 9010 Web Interface	28
Start Page	29

Configuration Wizard	29
System Information	29
Settings	29
Support	30
Installing New Software	32
Obtaining New Software	32
Installing Updated Software	32
Restart Options	34
Restart	34
Restore Settings	34
Reset to Factory Default Settings	34
<i>Bluetooth</i> Client Installation	36
Appendix A – Technical specification.....	37
Appendix B – Troubleshooting.....	40
Appendix C – Parameters.....	45
Appendix D – Definition of Terms and Abbreviations	47
Index	50

1. Legal Notices

About this Document

This document provides introductory instructions on how to set up and manage the AXIS 9010 within your networking environment. Should you require more information, please refer to the Axis website at <http://www.axis.com>.

Safety Markings

Please observe all safety markings in this manual when using the product.

Caution! - Potential hazard that can damage the product.

Important! - Potential hazard that can seriously impair operation.

Do not proceed beyond any of the above notices until you fully understand the implications.

Maintenance

It is recommended that you use a moist cloth to clean the unit. Do not use petroleum based substances as this may cause damage to the casing.

Trademark Acknowledgements

The *Bluetooth* trademarks are owned by their proprietor and used by Axis Communications AB under license. DOS, Ethernet, Macintosh, Microsoft, OS/2, UNIX and Windows, are registered trademarks of their respective holders.

Copyright Information

The unauthorized copying of materials that are covered by copyright and other international proprietary or intellectual property rights is prohibited in most countries. Axis Communications AB recommends that the users of this equipment seek the necessary authorizations for copying material. The instructions for use in the manual shall not be considered as an inducement to make illicit duplications of material. Any duplication will be made at the user's own risk.

Software Disclaimer

Part of the AXIS 9010 is based on a free SNMP package.

Copyright 1989, 1991, 1992 by Carnegie Mellon University. Derivative Work - Copyright 1996, 1998, 1999, 2000 The Regents of the University of California.

All Rights Reserved: Permission to use, copy, modify and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appears in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of CMU and The Regents of the University of California not be used in advertising or publicity pertaining to distribution of the software without specific written permission.

CMU AND THE REGENTS OF THE UNIVERSITY OF CALIFORNIA DISCLAIM ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL CMU OR THE REGENTS OF THE UNIVERSITY OF CALIFORNIA BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM THE LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Disclaimer of Liability

Every care has been taken in the preparation of this manual; if you detect any inaccuracies or omissions, please

inform us by contacting your local Axis office.

Axis Communications AB cannot be held responsible for any technical or typographical errors and reserves the right to make changes to the product and manuals without prior notice.

AXIS COMMUNICATIONS AB MAKES NO WARRANTY OF ANY KIND WITH REGARD TO THE MATERIAL CONTAINED WITHIN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

AXIS COMMUNICATIONS AB SHALL NOT BE LIABLE NOR RESPONSIBLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE FURNISHING, PERFORMANCE OR USE OF THIS MATERIAL.

Regulatory Statement


This device must be installed and used in accordance with the instruction manual. This device complies with the following radio frequency and safety standards.

USA & Canada - This device complies with part 15 of the Federal Communications Commission (FCC) rules and with RSS-210 of the Industry Canada (IC). Operation is subject to the following conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Europe - This device complies with the requirements of the R&TTE Directive 1999/5/EC with the test suites as per standards:

- * EN 60950 Safety of Information Technology equipment
- * ETS 300 328 Technical requirements for radio equipment
- * ETS 300 826 General EMC requirements for radio equipment



Limited Hardware Warranty

AXIS 9010

Axis Communications AB warrants the original owner that the product delivered will be free from defects in material and workmanship for 90 days following the date of purchase. This warranty does not cover any damage attributable to erroneous installation of the product.

THIS WARRANTY IS THE SOLE WARRANTY AND IS IN LIEU OF ANY OTHER WARRANTY, WHETHER EXPRESSED, IMPLIED OR STATUTORY, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NONINFRINGEMENT, OR ANY WARRANTY ARISING OUT OF ANY PROPOSAL, SPECIFICATION OR SAMPLE. NOTWITHSTANDING THE FOREGOING AXIS SHALL HAVE NO LIABILITY FOR ANY INDIRECT OR SPECULATIVE DAMAGES (INCLUDING, WITHOUT LIMITING THE FOREGOING, CONSEQUENTIAL, INCIDENTAL AND SPECIAL DAMAGES) ARISING FROM THE USE OF OR INABILITY TO USE THIS PRODUCT, WHETHER ARISING OUT OF CONTRACT, NEGLIGENCE, TORT, OR UNDER ANY WARRANTY, IRRESPECTIVE OF WHETHER AXIS HAS ADVANCE NOTICE OF THE POSSIBILITY OF ANY SUCH DAMAGES, INCLUDING, BUT NOT LIMITED TO LOSS OF USE, BUSINESS INTERRUPTIONS, AND LOSS OF PROFITS, NOTWITHSTANDING THE FOREGOING, AXIS' TOTAL LIABILITY FOR ALL CLAIMS UNDER THIS AGREEMENT SHALL NOT EXCEED THE PRICE PAID FOR THE PRODUCT. THESE LIMITATIONS ON POTENTIAL LIABILITIES WERE AN ESSENTIAL ELEMENT IN SETTING THE PRODUCT PRICE. AXIS NEITHER ASSUMES NOR AUTHORIZES ANYONE TO ASSUME FOR IT ANY OTHER LIABILITIES.

This warranty does not cover replacement of products damaged by abuse, accident, misuse, neglect, alteration, repair, disaster, improper installation or improper testing

Support Service

Should you require any technical assistance, please go to the Axis' website, contact your local dealer or use the support addresses at the back of this manual. If you are connected to the Internet, you can obtain on-line manuals, technical support, software updates, application software and general corporate information from Axis' website.

Axis Official Home Page

All applicable software and information are available from the Axis' website at <http://www.axis.com>. This site enables you to access corporate and support information, and learn more about other Axis products.

www.axis.com

AXIS 9010 User's Manual

Revision 1.0

Part No: 18082

Dated: March 2001

Copyright © Axis Communications AB, 1996 - 2001

2. Quick Installation Procedure


2.1 Installing your AXIS 9010

Follow the instructions below to quickly install the AXIS 9010 on an Ethernet network, which must be a TCP/IP-based system.

The AXIS 9010 supports DHCP server management and client IP address management. By default, the IP address of the AXIS 9010, as well as the IP addresses for the *Bluetooth* clients, are set automatically. No configuration is therefore necessary and you can follow the instructions below.

If you do **not** have a DHCP server, IP addresses must be assigned manually. Please go through the instructions 1-2 below and then refer to the installation instructions in section 5. *AXIS 9010 IP Setting*, on page 16 and section 6. *Bluetooth Client IP Setting*, on page 19.

1. Connect your AXIS 9010 - first to the network with an Ethernet cable and then to the mains supply with the power supply (AXIS type PS-B):

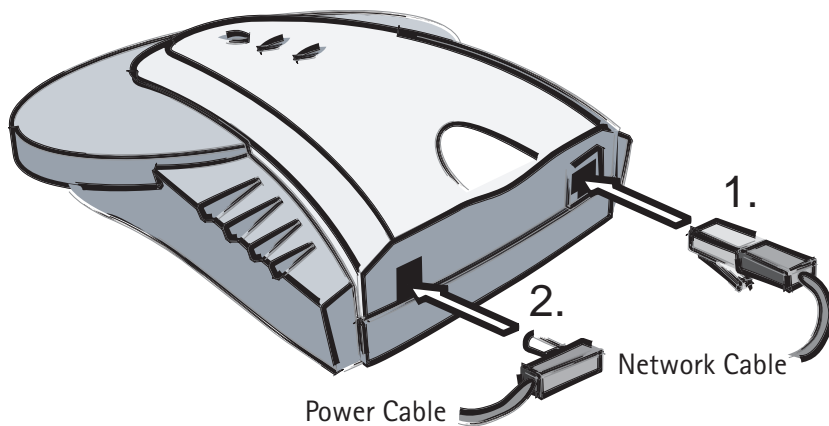

2. Check the following after about 30 seconds:
 - The Power indicator displays a steady green light.
 - The Network indicator displays a steady or a flashing orange or green light.

Your AXIS 9010 is now ready for use.

2.2 Using your AXIS 9010

Make sure that the *Bluetooth* client, such as a laptop or a PDA, operates with *Bluetooth* wireless technology and supports the LAN access profile.

1. Start the *Bluetooth* application in your client.
2. Start an inquiry and scan for *Bluetooth* devices.
3. Choose your AXIS 9010 from the list of alternatives and set up a *Bluetooth* radio link.
4. By default, the *Bluetooth* Passkey is set to a blank value for your AXIS 9010. This means that if a log on window appears in your client before you have established a *Bluetooth* radio link, the *Bluetooth* Passkey entry field should be left empty.

2.3 Accessing AXIS 9010 Web Interface

To access the internal Web interface, you enter the IP address of your AXIS 9010 in the location field of your Web browser. By default, the *Bluetooth* Device Name of the AXIS 9010 is: "AXIS 9010 (<IP address>)". This makes it easy to find the IP address of the AXIS 9010. The AXIS 9010 user ID is *root* and the default password is *pass*.

3. Preface

Thank you for purchasing the AXIS 9010 which uses *Bluetooth* wireless technology in order to connect to traditional networks.

3.1 About Axis Communications

Axis Communications is a leader in network connectivity and emerging wireless Internet-based services. The company is at the forefront of developing network appliance solutions that enable users to get easy and immediate access to devices and services. Axis is one of the global leaders in several key thin server and network device markets, such as printer, storage and video connectivity, and is doing pioneering work in the rapidly expanding markets of wireless and mobile communications.

Founded in 1984, Axis is headquartered in Lund, Sweden and has a total of 28 offices throughout North America, Asia and Europe.

3.2 Other Axis Products

Today, Axis Communications offers several major ThinServer product lines:

Mobile Access is a family of network access solutions that create local "hot spots" of high-speed wireless connectivity areas. These areas provide a wireless communications link to local networks and the Internet for mobile devices equipped with wireless technology. Axis provides solutions that scale from network access devices to larger, more advanced systems to meet the range of needs for creating new mobile networks and services.

Network Print Servers offer a powerful and cost-efficient method for sharing printer resources in your network. They connect to any standard printer, featuring high performance, simple management and easy upgrading across the network. The print servers are available in Ethernet, Fast Ethernet and Token Ring versions.

IBM Mainframe and S/3x - AS/400 Print Servers and Protocol Converters include a wide range of LAN, coax and twinax attached print servers for the IBM host environment. By emulating IBM devices, these servers provide conversion of the IPDS, SCS and 3270DS data streams to the major ASCII printer languages.

Network Attached CD/DVD Servers provide a flexible and cost-efficient solution for sharing CD-ROMs, DVD-ROMs and other optical media across the network. They are available in Ethernet, Fast Ethernet and Token Ring versions.

Network Attached Storage Servers make it possible to easily make hard disk storage available in Ethernet networks. Through direct access by clients, yet integrating into existing security schemes, and requiring a minimum of maintenance they also provide a low total cost of ownership for network storage.

Network Camera Servers provide live images using standard Internet technology, thus enabling access to live cameras via any standard Web browser. They offer a perfect solution for remote surveillance over the Internet; their sharp images can bring life into any website. These servers support Ethernet as well as PSTN and GSM phone lines.

Network Document Servers enable easy distribution of paper-based information across workgroups and the enterprise. By sending scanned documents to your destination via the Internet/intranet, you will reduce your faxing/ mailing costs, as well as save time, thus improving your organization's efficiency

3.3 About this Manual

This manual provides introductory information as well as detailed instructions on how to set up and manage the AXIS 9010 in wireless network environments. It is intended for everyone involved in installing and managing the AXIS 9010.

To fully benefit from the manual, you should be familiar with basic networking principles.

This manual is applicable for the AXIS 9010 with software version release 1.0.

4. Product Overview

4.1 Package Contents

Verify that the AXIS 9010 package is complete by using the checklist below.

Please contact your dealer if anything should be missing or damaged. All packing materials are recyclable.

Hardware	Quantity	Model Variants	Part Numbers
AXIS 9010	1	9010 E3	0128-001-03
The AXIS 9010 User's Manual	1	rev. 1.0	18082
Power Supply (AXIS PS-B)	1	Australia	13269
		Europe	13267
		Japan	13936
		UK	13268
		USA	13270
Mounting Bracket	1	9010 E1	17662
Screws	2	ST4.2x25 RXS-Z FZB	17645

Note:

If you need to mount your AXIS 9010 on a wall or ceiling, the AXIS 9010 comes with a mounting bracket.

4.2 Physical Description

Front Panel



Underside



Rear Panel





4.3 Indicators

Indicator	Color/Behavior	Explanation
Power	Green	OK
	Not lit	No power/Error
Network	Green	OK - 100 Mbps network connected
	Green flashing	Activity on 100 Mbps network
	Orange	OK - 10 Mbps network connected
	Orange flashing	Activity on 10 Mbps network
	Not lit	No physical connection to the network
Radio	Green	<i>Bluetooth</i> Radio link connected
	Green flashing	Activity on a <i>Bluetooth</i> Radio link
	Not lit	No <i>Bluetooth</i> Radio link connected

4.4 Placing the AXIS 9010


The AXIS 9010 can be placed horizontally on a flat surface, e.g. on your office desk, or with the mounting bracket on a wall or a ceiling. Place the AXIS 9010 close to power outlet and network connection.

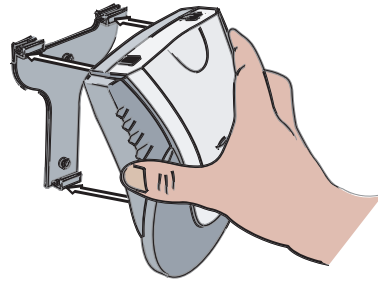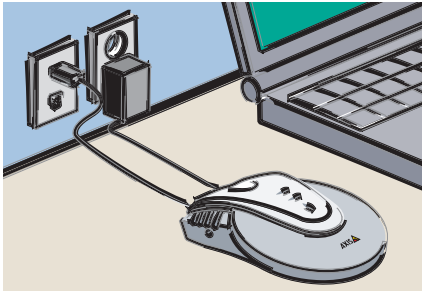

When placing the AXIS 9010, consider that it uses radio waves for transmission. Because the surrounding environment affects the range of the *Bluetooth* radio signal, try to avoid placing the AXIS 9010 where the radio signal can be shadowed by nearby obstacles.

The *Bluetooth* radio signal and its transmission quality can also be interfered with by other devices, such as microwave ovens, that use the same or adjacent frequencies. Do not place the AXIS 9010 close to any such devices.

To mount the AXIS 9010 on a wall, screw the mounting bracket into a wall using the two screws and carefully attach the AXIS 9010 to the mounting bracket.

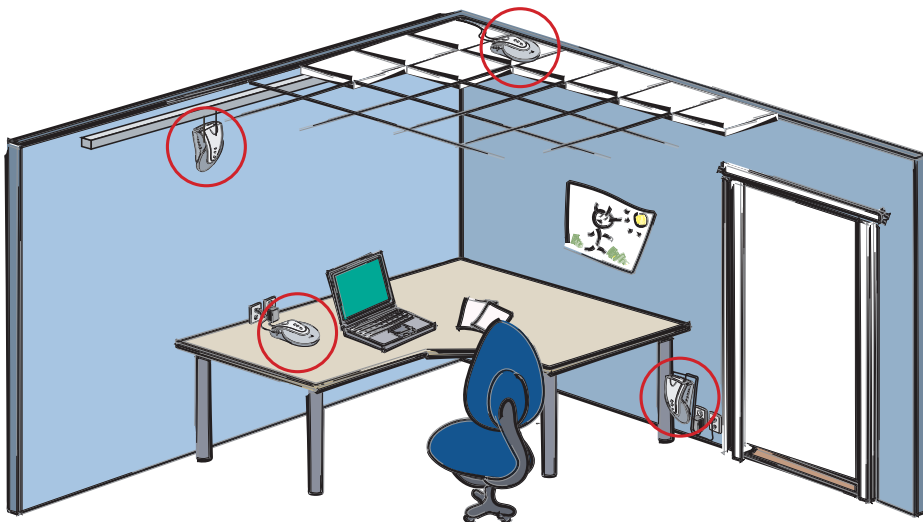


4.5 *Bluetooth* Wireless Technology

A revolution taking shape today is fundamentally changing the way people work, communicate and access information. The Internet is going wireless with an emerging world of new devices that bring mobile freedom to everyone.

Bluetooth wireless technology allows users to make effortless, wireless and instant connections between various communication devices, such as notebook computers and PDAs. Data can be sent at a speed of up to 723 kbps and for as many as seven simultaneous data users. The sophisticated mode of transmission adopted in the *Bluetooth* specification ensures protection from interference and security of data.

The *Bluetooth* radio operates in an unlicensed frequency band ensuring communication compatibility worldwide. This makes it easier for anyone to set up a local network and provide tailored wireless services based on *Bluetooth* wireless technology.

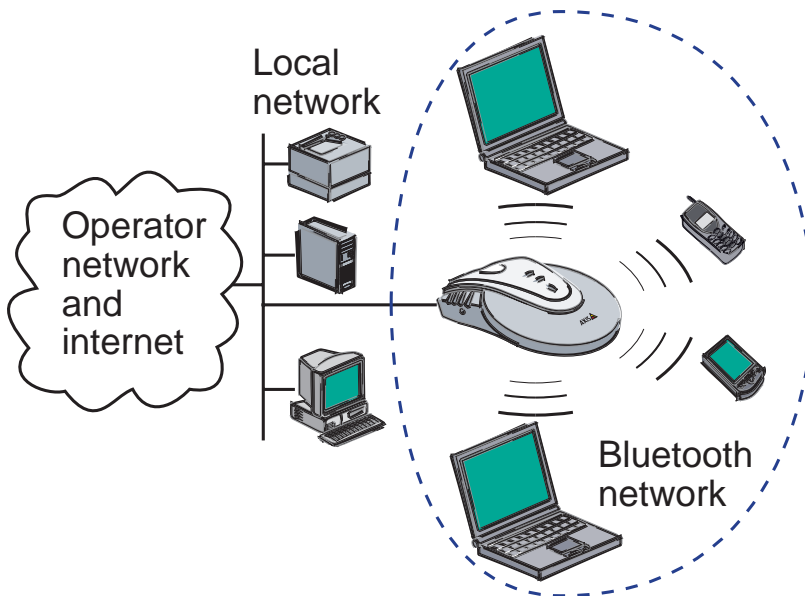

4.6 AXIS 9010

The AXIS 9010 provides the "missing link" between devices powered by *Bluetooth* wireless technology and the Internet. Wireless devices within range have a simple, high-speed way to access network resources. The AXIS 9010 also provides a firm, flexible foundation for access control, security and other management and administration functions. Furthermore, the AXIS 9010, like other newly developed Axis products, has been designed around Axis' Linux-based ThinServer technology. It utilizes the latest version of the highly recognized ETRAX "system on a chip" technology developed by Axis and runs an embedded Linux operating system and built-in Web-server.

The *Bluetooth* protocol stack developed by Axis, the OpenBT, is available for download at <http://developer.axis.com/>.

The AXIS 9010 includes a Linux operating system, which is freely distributed under the GNU General Public License as published by the Free Software Foundation. This software provides a stable and reliable platform.

5. AXIS 9010 IP Setting

When connecting to the network, your AXIS 9010 needs an IP address in order to be identified in the network. For the AXIS 9010, you can either set the IP address automatically or manually.

5.1 AXIS 9010 Automatic IP Setting

If you have access to a DHCP server, you can choose to let it assign an IP address to your AXIS 9010. All parameters needed for connection between the network, the AXIS 9010 and the *Bluetooth* clients are preset. Assignment through DHCP is the default setting.

Please follow the instructions in section 2. *Quick Installation Procedure*, on page 6.

If you use DHCP to automatically assign a dynamic IP address to your AXIS 9010, the IP address is not known. You can locate the IP address by making an inquiry from a *Bluetooth* client to find the AXIS 9010, which will be shown in a list of devices. By default the *Bluetooth* Device Name of the AXIS 9010 is: AXIS 9010 (<IP address>). If the above method is not possible, check the IP address in the DHCP server or contact your network administrator.

5.2 AXIS 9010 Manual IP Setting

If you do not have access to a DHCP server, you must set the IP address for your AXIS 9010 manually. Start by installing the AXIS 9010 according to the instructions steps 1-2 in section 2.1 *Installing your AXIS 9010*, on page 6.

To assign the IP address manually, map the AXIS 9010 physical address (also called MAC address) to the IP address. The physical address of your AXIS 9010 is the same number as the serial number. The serial number is located on the label placed on the underside of the unit.

You can easily assign a unique IP address to your AXIS 9010 from a computer on your network with the ARP command. The ARP commands will show and change the address conversion table for IP addresses and the physical addresses.

Important!

Do NOT use the IP addresses used in the following examples when installing your AXIS 9010. Always consult your network administrator before assigning an IP address to your AXIS 9010.

Follow the instructions below to set the IP address manually with ARP:

1. Note the serial number found on the underside label of the AXIS 9010. You need to know this to assign the IP address.
2. Acquire an unused IP address (external or internal) for your AXIS 9010 from your network administrator or Internet Service Provider (ISP).
3. Use a Windows- or a UNIX-based computer on your network to assign the new IP address to your AXIS 9010. You must set the IP address for the AXIS 9010 from a workstation within the same subnet.
4. If the AXIS 9010 is already connected to the network, restart it by removing and replacing the power cable. If you do not set the new IP address within 2 minutes you have to reset the AXIS 9010 again.
5. Map the physical address (equivalent to the serial number) of your AXIS 9010 to the IP address using the ARP command.
Then ping your IP address by sending a packet to the specified address and wait for a reply.

Windows 95/98/ME & NT/2000:

Start a DOS window and type these commands:

Syntax:

```
arp -s <IP address> <Serial number>
ping -t -l 408 <IP address>
```

Example:

```
arp -s 171.16.9.198 00-40-8C-18-10-D0
ping -t -l 408 171.16.9.198
```

The following message will be displayed in the MS-DOS window.

```
C:\WINDOWS>arp -s 171.16.9.198 00-40-8C-18-10-D0
C:\WINDOWS>ping -t -l 408 171.16.9.198
Pinging 171.16.9.198 with 408 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.
Request timed out.
Reply from 171.16.9.198: bytes=408 time=3ms TTL=64
Reply from 171.16.9.198: bytes=408 time=2ms TTL=64
Reply from 171.16.9.198: bytes=408 time=2ms TTL=64
```

UNIX:

Type these commands in your command line:

Syntax:

```
arp -s <IP address> <Serial number>
ping -s 408 <IP address>
```

Example:

```
arp -s 171.16.9.198 00:40:8C:18:10:D0
ping -s 408 171.16.9.198
```

The following text will be displayed in the command window:

```
>arp -s 171.16.9.198 00:40:8C:18:10:D0
>ping -s 408 171.16.9.198

PING 171.16.9.198 (171.16.9.198): 408 data bytes
416 bytes from 171.16.9.198: icmp_seq=12 ttl=64 time=1.7 ms
416 bytes from 171.16.9.198: icmp_seq=13 ttl=64 time=1.3 ms
416 bytes from 171.16.9.198: icmp_seq=14 ttl=64 time=1.3 ms
416 bytes from 171.16.9.198: icmp_seq=15 ttl=64 time=1.2 ms
416 bytes from 171.16.9.198: icmp_seq=16 ttl=64 time=1.3 ms
416 bytes from 171.16.9.198: icmp_seq=17 ttl=64 time=1.2 ms
416 bytes from 171.16.9.198: icmp_seq=18 ttl=64 time=1.2 ms
416 bytes from 171.16.9.198: icmp_seq=19 ttl=64 time=1.2 ms
```

6. Stop pinging the AXIS 9010 by typing "Ctrl-C".

The IP setting is complete.

Important!

If there is no DHCP server present, you must also change the settings for the *Bluetooth* clients in the AXIS 9010 Web interface. Please refer to section 6. *Bluetooth Client IP Setting*, on page 19 for more information.

If your network has subnetworks or if you want to access the Internet, the subnet mask and gateway to your AXIS 9010 must also be defined. Please consult your network administrator or your ISP. You can set these parameters in the AXIS 9010 Web interface. Please refer to section 11. *AXIS 9010 Web Interface*, on page 28.

6. *Bluetooth* Client IP Setting

When connecting to the AXIS 9010, your *Bluetooth* client (e.g. laptop) needs an IP address in order to be identified on the network.

There are three different ways for the AXIS 9010 to assign IP addresses for your *Bluetooth* clients:

- Automatic
- Within a Private network (IP Masquerading)
- Manual

Important!

Set the dial-up application in your client to – server assigned IP address – in order to let the AXIS 9010 assign IP addresses to the *Bluetooth* clients.

6.1 *Bluetooth* Client Automatic IP Setting

If you have access to a DHCP server, you can choose to let it assign IP addresses to your clients via the AXIS 9010. All parameters needed for connection between the network, the AXIS 9010 and the *Bluetooth* clients are preset. IP address assignment through DHCP is the default setting.

If you use Automatic IP setting and you activate the authentication function (RADIUS), the IP addresses for the *Bluetooth* clients will primarily be assigned by the RADIUS server and secondly by the DHCP server. For more information about RADIUS refer to section 8. *Authentication*, on page 23.

6.2 *Bluetooth* Client IP Setting within a Private Network (IP Masquerading)


You can choose to assign the IP addresses for your *Bluetooth* clients within a range reserved for Private networks, using IP Masquerading.

Important!

You must set the IP address to your AXIS 9010 before you can set the IP addresses to your clients. Please refer to section 5. *AXIS 9010 IP Setting*, on page 16 for more information.

If you use IP Masquerading, the IP addresses for your *Bluetooth* clients will only apply between the *Bluetooth* clients and your AXIS 9010. They will be hidden to any network on the other side of the AXIS 9010.

The packets transmitted from the *Bluetooth* clients will appear as if they were originated directly from the AXIS 9010. IP Masquerading enables you to use several clients with unique internal identities through only one "official" IP address. .

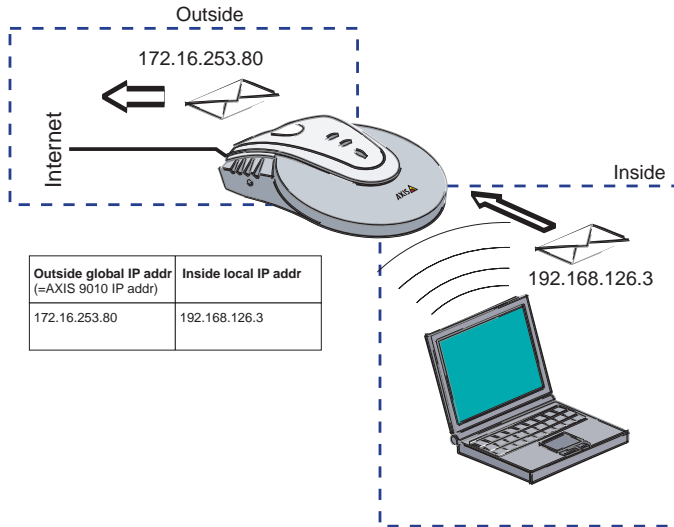

IP Masquerading uses almost the same method for IP translation as NAT (Network Address Translation), except that masquerading also uses the port number in the translation.

You assign the IP addresses for the *Bluetooth* clients in the AXIS 9010 Web interface. For more information please refer to section 11. *AXIS 9010 Web Interface*, on page 28.

Note:

If you do not have access to more than one IP address on your network, you should select IP Masquerading for your clients.

6.3 *Bluetooth* Client Manual IP Setting

If you choose to assign the IP addresses for the *Bluetooth* clients manually, you need to specify the range of your IP addresses. Assign a unique and unused address range in order to prevent conflicts with other network devices.

To obtain the range of your IP addresses, consult your network administrator .

Important!

You must set the IP address to your AXIS 9010 before you can set the IP addresses to your clients. Please refer to section 5. *AXIS 9010 IP Setting*, on page 16 for more information.

You assign the IP addresses for the *Bluetooth* clients in the AXIS 9010 Web interface. For more information please refer to 11. *AXIS 9010 Web Interface*, on page 28.

7. Security

The AXIS 9010 has built-in functionality providing security for both management and access control.

7.1 Web Interface and FTP Security

In order to protect the settings from being changed by an unauthorized user, a security log on process is initiated before you can access the Web interface or a FTP session. The user ID is *root* and the default password is *pass* in your AXIS 9010.

It is strongly recommended that you set a new password instead of the default password, *pass*. This password will apply for all users of the Web interface.

You can change the password in the AXIS 9010 Web interface.

7.2 *Bluetooth* Radio Link Security

To prevent unauthorized use of your AXIS 9010 a security log on process is initiated before you can set up a *Bluetooth* radio link. By default, the *Bluetooth* Passkey is set to a blank value. This means that if a log on window appears in your client before you have established a *Bluetooth* radio link, the *Bluetooth* Passkey entry field should be left empty. It is strongly recommended that you set a specific passkey for your AXIS 9010.

When two *Bluetooth* devices connect to each other, a link key is created. By default the storing of the link key is not active. If you activate the storing of the link key, the log on window will not appear in your client when connecting to your AXIS 9010. The number of link keys that can be stored is limited to 8 clients.

You can change the *Bluetooth* Passkey and activate the storing of the link key in the AXIS 9010 Web interface.

8. Authentication

The AXIS 9010 has support for RADIUS (Remote Authentication Dial-In User Service). RADIUS enables you to consolidate the management of all your remote users and enhance the security of your network. RADIUS is an encrypted protocol that provides authentication, authorization and accounting of user access in a network. It supports encrypted exchange of credentials between the remote end-user and the authentication server.

User credentials are forwarded to a RADIUS server, which in turn manages a credentials database. The log on parameters in the *Bluetooth* client, user ID and password are the input to the RADIUS server. The server checks the user ID and password, then replies with the access privileges for the user.

Authentication checks user credentials to verify the user's identity. Authorization controls user privileges and access restrictions. Accounting keeps track of the amount of bytes and time for each connected session.

The RADIUS server can also handle the IP address assignment to the *Bluetooth* clients. If you use Automatic IP setting for the client and you activate RADIUS, the IP addresses for the *Bluetooth* clients will primarily be assigned by the RADIUS server and secondly by the DHCP server.

You activate the RADIUS function in the AXIS 9010 Web interface.

9. Monitoring

The AXIS 9010 has support for SNMP (Simple Network Management Protocol). SNMP is a protocol that enables remote management and monitoring of network entities. Functions like activity tracking, performance adjustment, error detection, resource monitoring, status control, initialization and security management are available through this protocol.

The AXIS 9010 has support for both SNMP version 1 (SNMPv1) and version 3 (SNMPv3). SNMPv1 transmits everything unencrypted and for access control it relies on community names, which are often known secrets. SNMPv3 uses encryption and can therefore provide a more secure configuration and monitoring link.

You activate the SNMP function in the AXIS 9010 Web interface.

9.1 AXIS MIB

The actual management is handled by a Network Management System (NMS) software running on a host on your network. To enable the NMS to read events from AXIS 9010 you need to add the AXIS MIB to your NMS software.

The AXIS MIB is available at www.axis.com. Download the MIB to your NMS.

10. Default Settings

The AXIS 9010 comes with a number of default settings. All of these settings are changeable.

Setting	Default Setting
AXIS 9010 IP address assignment	Automatic (DHCP)
<i>Bluetooth</i> clients IP address assignment	Automatic (DHCP/RADIUS)
Masquerading range (when masquerading is chosen)	192.168.126.1 - 192.168.126.254
User ID	root
Password	pass
<i>Bluetooth</i> Passkey	blank value (empty string)
Store <i>Bluetooth</i> Link key	not active
Host name	axisxxxxxx
<i>Bluetooth</i> Device Name	AXIS 9010 (<IP address>)
Access Point name	AXIS 9010
RADIUS	not active
RADIUS Authentication Port (when RADIUS is activated)	1812
RADIUS Accounting Port (when RADIUS is activated)	1813
SNMP	not active
Read community (when SNMPv1 is activated)	public
Trap port number (when SNMP is activated)	162
Trap on Authentication failure (when SNMP is activated)	not active

AXIS 9010 IP Settings

By default, the IP address for your AXIS 9010 is set to be assigned automatically (DHCP).

***Bluetooth* Client IP Settings**

The IP addresses for your *Bluetooth* clients are also set to be assigned automatically by default. If you use Automatic IP setting and you activate the authentication function (RADIUS), the IP addresses for the *Bluetooth* clients will primarily be assigned by the RADIUS server and secondly by the DHCP server. If you do not activate RADIUS, the DHCP server will handle the IP address assignment for the *Bluetooth* clients.

Masquerading Range

If you choose to assign the IP addresses for your *Bluetooth* clients within a Private network (IP Masquerading), the range 192.168.126.1 - 192.168.126.254 is preset as the default range.

User ID and Password

To access the AXIS 9010 Web interface or a FTP session a security log on process is initiated. The user ID is *root* and the default password is *pass* in your AXIS 9010.

***Bluetooth* Passkey**

To prevent unauthorized use of your AXIS 9010 you have a *Bluetooth* Passkey that restricts access to the *Bluetooth* radio link. By default, the *Bluetooth* Passkey is set to a blank value for your AXIS 9010. This means that if a log on window appears in your client before you have established a *Bluetooth* radio link, the *Bluetooth* Passkey entry field should be left empty.

***Bluetooth* Link key**

When two *Bluetooth* devices connect to each other, a link key is created. By default the storing of the link key is not active. If you activate the storing of the link key, the log on window will not appear in your client when connecting to your AXIS 9010.

Host Name

Your AXIS 9010 has a specific unit name, a Host name. This name is used in welcome and error responses from the FTP or Web server used by your AXIS 9010. By default, the Host name for your AXIS 9010 is *axis.xxxxxx*, where *xxxxxx* is the last 6 characters of the serial number found on the underside label of your AXIS 9010.

If your network is using a DNS server, use the assigned name for your AXIS 9010 in that DNS server as the Host name. If your network does not have a DNS server, you can use the default name or enter a name of your own.

Bluetooth Device Name

The *Bluetooth Device Name* is the name that a *Bluetooth* device presents itself with. By default, the *Bluetooth Device Name* for your AXIS 9010 is “AXIS 9010 (<IP address>)”.

Access Point Name

When connecting to your AXIS 9010 from a *Bluetooth* client you can perform an inquiry to scan for and discover other connectable *Bluetooth* devices, such as your AXIS 9010. In most cases, these devices are displayed in a list with the *Bluetooth Device Address* and/or the *Bluetooth Device Name*. To more easily find your AXIS 9010 in these lists the first part of the *Bluetooth Device Name*, the Access Point name, is by default set to “AXIS 9010”

Authentication (RADIUS)

RADIUS is a protocol used by remote access servers to provide authentication, authorization and accounting of user access in a network, and for automatic IP setting. If you choose to activate the authentication function, specify your RADIUS server and the transmission parameters in the AXIS 9010 Web interface. By default, RADIUS is set to “not active”. When activated, the default Authentication port number is 1812, and the default Accounting port number is 1813.

SNMP

SNMP is a protocol that enables remote management and monitoring of network entities. If you choose to activate the SNMP, you need to specify the SNMP parameters in the AXIS 9010 Web interface. By default, SNMP is set to “not active”. When SNMPv1 is activated, the default Read community name is *public*. By default, the Trap port number is set to 162, and the Trap on Authentication failure is set to “not active”.

Other Parameters

You can find an overview of all parameters of the AXIS 9010 in section *Appendix C - Parameters*, on page 45.


11. AXIS 9010 Web Interface

The AXIS 9010 has a built-in Web server with a Web interface for configuration, remote management and support information. In the Web interface you can check the settings and configure parameters.

11.1 Accessing the AXIS 9010 Web Interface


To access the Web interface, enter the IP address of the AXIS 9010 in the location field of a Web browser.

A log on process is initiated before you can access the Web interface. The AXIS 9010 user ID is *root* and the default password is *pass*.

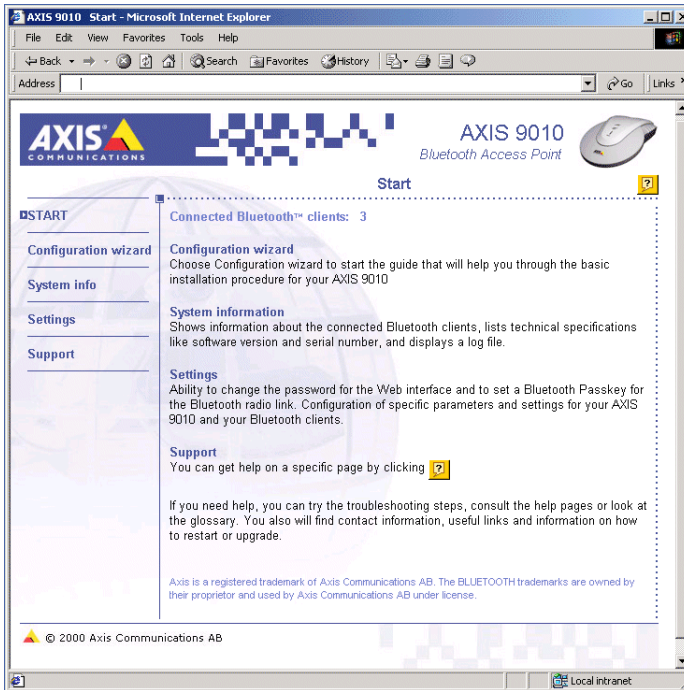

The left part of the window consists of a menu with links from which you can reach all the pages in the Web interface.

Note:

Online help  is available on every page within the AXIS 9010 Web interface. This is of particular relevance when configuring the unit. Use online help as a first point of reference for all administration queries.

11.2 Start Page

On the **Start** page of the AXIS 9010 Web interface, you will find general information about the contents of the Web interface and the number of connected *Bluetooth* clients.

11.3 Configuration Wizard

You can easily configure your AXIS 9010 by using the **Configuration Wizard**.

You can view the previous page by clicking **Back** and exit the Configuration wizard at any time by clicking **Close** or **Cancel**. The new configuration settings will not be saved to the AXIS 9010 until you click the **Finish** button on the last page of the wizard. The progress bar in the lower left corner of the Configuration wizard displays how far it is to the last wizard page.

11.4 System Information

System Information displays information about the connected *Bluetooth* clients, technical specifications and a log file. The log file, lists events like restarting information and error messages for your AXIS 9010.

11.5 Settings

You can configure the parameters directly from the **Settings** link in the Web interface, and set an identity for your AXIS 9010.

Security Web & FTP

In order to protect the settings from being changed by an unauthorized user, a security log on process is initiated before you can access the Web interface or a FTP session. The user ID is *root* and the default password is *pass* in your AXIS 9010. It is strongly recommended that you set a new password. This one password will apply for all users of the Web interface.

Security *Bluetooth*

To prevent unauthorized use of your AXIS 9010 a security log on process is initiated before you can set up a *Bluetooth* radio link. By default, the *Bluetooth* Passkey is set to a blank value for your AXIS 9010. It is strongly recommended that you set a specific passkey for your AXIS 9010. You can also activate the storing of the link key.

Network

Under **Network** you can decide which method to use for AXIS 9010 IP setting - Automatic or Manual. You will also find the Host name and current IP address for your AXIS 9010 as well as other network specific parameters like Subnet mask, Default gateway, Domain name, DNS servers and WINS servers. These parameters set a network identity for your AXIS 9010.

Bluetooth

Here you can set a *Bluetooth* Device Name for your AXIS 9010. You can also choose which method to use to set the IP addresses for the *Bluetooth* client: Automatic, IP Masquerading, or Manual.

RADIUS

This page enables you to activate RADIUS and set specific parameters for it. RADIUS is a protocol that enables remote authentication, authorization and accounting of user access in a network, plus automatic IP setting.

SNMP

This page enables you to activate SNMPv1 and SNMPv3. Here you also set the specific trap parameters.

Saved Settings


A complete list of all saved settings for an overview of the AXIS 9010 is displayed in this page.

11.6 Support

Troubleshooting

If you have problems, please try the troubleshooting steps first. Troubleshooting provides useful information to help you resolve any difficulty with your AXIS 9010. You can also find troubleshooting tips in this manual. Please refer to *Appendix B - Troubleshooting*, on page 40.

Help Contents

Help pages are sorted both by topic and alphabetical order. You can get specific, context-sensitive help on any page by clicking the **Help** icon  .

Glossary

The glossary contains explanations of different words and abbreviations that will appear in the Web interface or in the AXIS 9010 User's Manual.

Contact and Links

Here you can find support information and useful links which will take you to the **Axis 9010 Support page** and the **AXIS 9010 Product page**. They offer technical support, the latest news and problem forms for e-mail to Axis.

Status Report

The **Status Report** shows system information and the status of your AXIS 9010. When contacting Axis support, please copy the information in the Status Report and attach it to your message. This will help the support personnel to diagnose your problem.

Restart Options

Here you find information on how to restart, restore or reset your AXIS 9010.

Upgrade

When you click on the **Upgrade** link, your current software version is shown. You will also find a link to the download page on the Axis website, where software updates are offered.

12. Installing New Software

12.1 Obtaining New Software

The latest version of the AXIS 9010 software is available at www.axis.com.

12.2 Installing Updated Software

Download the updated software file and install it by doing the following:

1. Start a DOS window or a UNIX shell and find the catalogue where you have downloaded the new software.

Important!

Do NOT use the IP addresses used in the following examples when installing new software in your AXIS 9010.

2. Start an FTP session and write the following command:

Syntax:

```
ftp <IP address>
```

Example:

```
ftp 171.16.9.198
```

3. Log on to the AXIS 9010 using the correct user ID and password. By default, these are set to *root* and *pass* respectively. (The same log on parameters as to the Web interface.)

Syntax:

```
user id: <user ID>  
password: <password>
```

Example:

```
user id: root  
password: pass
```

4. Set the session to binary transfer mode.

Syntax:

```
bin
```

Example:

```
bin
```

5. Upload the new software to your AXIS 9010.

Syntax:

```
put <file name> flash
```

Example:

```
put 9010_100.bin flash
```

Caution!

Be careful not to interrupt the file transfer. If the transfer is interrupted, the AXIS 9010 may have to be re-initialized by your dealer.

6. The FTP prompt is returned once the programming is complete. The AXIS 9010 will restart automatically.
7. Exit the ftp session by typing “bye” or “quit”.

13. Restart Options

In certain circumstances, it may be necessary to restart, restore or reset your AXIS 9010.

If you choose to restart your AXIS 9010, all your current connections with your *Bluetooth* clients will be lost. However, all the settings in your AXIS 9010 will remain as before. This is performed by clicking the **Restart** button in the AXIS 9010 Web interface.

If you choose to restore your settings, all settings in your AXIS 9010 - except the IP address, Subnet mask, Default gateway, password and the IP address assignment method for your AXIS 9010 (DHCP or manual) - will be returned to their original default values. This is performed by clicking the **Restore** button in the AXIS 9010 Web interface.

When you reset your AXIS 9010, all settings are set to factory defaults. Use the **Reset** button on your AXIS 9010.

13.1 Restart

1. In the AXIS 9010 Web interface, click on the **Support** link and choose the **Restart Options** link.
2. Click on the **Restart** button.
3. All connections to the clients will be lost, while all settings in the AXIS 9010 remain intact.

13.2 Restore Settings

1. In the AXIS 9010 Web interface, click on the **Support** link and choose the **Restart Options** link.
2. Click on the **Restore** button.
3. Your AXIS 9010 is now restored to its original factory default settings except for the IP address, Subnet mask, Default gateway, password and the IP address assignment method for your AXIS 9010 (DHCP or manual).

13.3 Reset to Factory Default Settings

1. Switch off the AXIS 9010 by disconnecting the power cable.

2. Press and hold the Reset button with a small tool, such as a pen or a paper clip, and reconnect the power supply cable.
3. Continue to press the Reset button until the Network indicator displays red (this may take up to 30 seconds), then release the Reset button.
4. Your AXIS 9010 is now reset and all settings are returned to factory default.

14. *Bluetooth* Client Installation

The client you want to connect to the AXIS 9010 must operate with *Bluetooth* wireless technology and support the LAN Access Profile.

Set the dial-up application in your client to - server assigned IP address - to let the AXIS 9010 assign IP addresses to the *Bluetooth* clients.

Please refer to the specific *Bluetooth* client manual for information.

Appendix A - Technical specification

Supported System

Protocols:

- TCP/IP
- HTTP
- FTP
- ARP
- DHCP
- PPP
- PAP
- RADIUS
- SNMP
- *Bluetooth*

Network

- 10baseT Ethernet or 100baseTX Fast Ethernet, auto-sensing.

Operating System

- Embedded Linux

Hardware

- ETRAX 100LX (100 MHz, 32-bit RISC processor)
- 2 MB FLASH PROM
- 16 MB DRAM
- One RJ-45 connector (twisted pair)

Bluetooth Specification

- *Bluetooth* LAN Access Profile, *Bluetooth* Generic Access Profile and *Bluetooth* Serial Port Profile supported
- Point to multipoint operation, connecting up to 7 simultaneous data users.
- Internal antenna for optimal size and performance.

- Supports different data rates, such as:
 - Asymmetric data rate: 723 kbps Downlink,
57 kbps Uplink
 - Symmetric data rate: 434 kbps Downlink,
434 kbps Uplink

RF Specification

- RF output power *Bluetooth class 1*
- Frequency range 2.402 to 2.480 GHz
- Double sided IF bandwidth 1 MHz

Receiver Performance

- Sensitivity (Pin=-70dBm) max 0.1% BER
- Max input level (Pin=-20dBm) max 0.1% BER
- C/I 1MHz (C=-60dBm) min 0dB

Transmitter Performance

- Output power max 20 dBm
- Frequency deviation 140 to 175kHz
- Carrier drift (1 slot, 366us) max +/-25kHz
- Carrier drift (3 slots, 1598us) max +/-40kHz
- Carrier drift (5 slots, 2862us) max +/-40kHz

Built-in Web Server

Configuration

- Access point IP address assignment: Automatically (DHCP) or proprietary arp-ping method
- Client IP address assignment from the AXIS 9010: Automatically, via masquerading or manually
- RADIUS control settings
- SNMP control settings

Management

- *Bluetooth* monitor, connected clients
- System log file

Support Information

- Troubleshooting, glossary, contacts, FAQ

Security

- Web interface – password
- AXIS 9010 *Bluetooth* radio link – *Bluetooth* Passkey
- Support for RADIUS

Monitoring

- Support for SNMP

Software Upgrades

- Free updated software is available at Axis Communications' website:
<http://www.axis.com>
- Internal flash memory allows simple, central and remote software upgrades over the network using FTP.

Operating Conditions

- Indoor use only
- Temperature +5°C to +40°C (+40°F to +105°F)
- Humidity 20 – 80% RHG, non condensing humidity

Metrics

- Height 50 mm (1.97 inches)
- Width 143 mm (5.63 inches)
- Length 178 mm (7.01 inches)
- Weight 280 g (0.62 lbs.)

Power Consumption

- Maximum 2.5 W. Power provided by external supply
(Type PS-B, 12 V, 500 mA)

Appendix B - Troubleshooting

This section provides useful information to help you resolve any difficulty you might have with your AXIS 9010. Fault symptoms, possible causes and remedial actions are provided within a quick reference table.

Please visit www.axis.com for latest troubleshooting tips, more support and additional help through the FAQ database or to fill in and mail a problem form.

Troubleshooting is also available in the AXIS 9010 Web interface.

Hardware

Symptoms	Possible causes	Remedial actions
The Power indicator is not constantly lit.	Faulty power supply.	Check your power supply and replace if needed.
The Network indicator is red.	No network access.	<ol style="list-style-type: none"> 1. Verify that your network is accessible through your network socket. 2. Verify that your network cable is functional.

Bluetooth Radio Link

Symptoms	Possible causes	Remedial actions
Your <i>Bluetooth</i> client cannot find the AXIS 9010 after an inquiry has been made.	Insufficient <i>Bluetooth</i> radio signal. You are not within the radio range of the AXIS 9010 or too many obstacles between the AXIS 9010 and your <i>Bluetooth</i> client obstruct the <i>Bluetooth</i> radio signal.	Move to another position or move closer to the AXIS 9010 and try again.
	The AXIS 9010 is already serving a maximum number of <i>Bluetooth</i> clients.	Wait and try to connect again later.

Dial-up

Symptoms	Possible causes	Remedial actions
Your <i>Bluetooth</i> client can find the AXIS 9010 after an inquiry has been made, but you cannot connect to the AXIS 9010.	The AXIS 9010 is already serving a maximum number of <i>Bluetooth</i> clients.	Wait and try to connect again later.
	The AXIS 9010 is not connected properly.	<ol style="list-style-type: none"> 1. Check Power and Network indicator. 2. Check that assignment of IP addresses for the AXIS 9010 and for <i>Bluetooth</i> clients is correct. 3. To further check the IP addresses, run the Ping command from another computer as described in "IP address check" at the end of this chapter. Follow the appropriate recommendations.
	Your <i>Bluetooth</i> client lacks the correct <i>Bluetooth</i> Profile - the LAN Access Profile.	Contact the supplier of your <i>Bluetooth</i> client and check if an upgrade with the correct profile is possible. Otherwise, obtain a <i>Bluetooth</i> client with the correct profile.
	The settings of your <i>Bluetooth</i> client are not correct.	Check instructions for your <i>Bluetooth</i> client.

Session

Symptoms	Possible causes	Remedial actions
The data rate of the transmission is very low.	Insufficient <i>Bluetooth</i> radio signal. You are not within the radio range of the AXIS 9010 or too many obstacles between the AXIS 9010 and your <i>Bluetooth</i> client obstruct the <i>Bluetooth</i> radio signal.	Move to another position or move closer to the AXIS 9010.
	The settings of your <i>Bluetooth</i> client are not correct.	Check instructions for your <i>Bluetooth</i> client.
	The <i>Bluetooth</i> radio signal is interfered.	Check that other devices using the same or adjacent frequencies are not placed close to the AXIS 9010 or the <i>Bluetooth</i> client.

Some of your applications will not run.	The IP address of your <i>Bluetooth</i> client is set through IP Masquerading. Applications outside your network that try to connect to a <i>Bluetooth</i> client served by your AXIS 9010 do not know the correct IP address since it is masqueraded.	If possible, choose another IP setting than IP Masquerading for your <i>Bluetooth</i> client.
The <i>Bluetooth</i> Client is not accessible from outside the network.	The AXIS 9010 is not connected properly.	<ol style="list-style-type: none"> 1. Check Power and Network indicator. 2. Check that assignment of IP addresses for the AXIS 9010 and for <i>Bluetooth</i> clients is correct. 3. To further check the IP addresses, run the Ping command from another computer as described in "IP address check" at the end of this chapter. Follow the appropriate recommendations.
	The <i>Bluetooth</i> client is not connected to the AXIS 9010.	Wait and try to connect again later.
	The IP address of the <i>Bluetooth</i> client is set through IP Masquerading. Clients trying to connect to a <i>Bluetooth</i> client served by your AXIS 9010 do not know the correct IP address since it is masqueraded.	If possible, choose another IP setting than IP Masquerading for your <i>Bluetooth</i> client.
You lose the connection.	Insufficient <i>Bluetooth</i> radio signal. You are not within the radio range of the AXIS 9010 or too many obstacles between the AXIS 9010 and your <i>Bluetooth</i> client obstruct the <i>Bluetooth</i> radio signal.	Move to another position or move closer to the AXIS 9010 and try to reconnect.
	The settings of your <i>Bluetooth</i> client are not correct.	Check installation instructions and the manual for your <i>Bluetooth</i> client.
	The <i>Bluetooth</i> radio signal is interfered.	Check that other devices using the same or adjacent frequencies are not placed close to the AXIS 9010 or the <i>Bluetooth</i> client.

<p>The connection fails when you try to dial up and access applications, even though you are connected to the AXIS 9010.</p>	<p>The RADIUS parameter settings are incorrect.</p>	<ol style="list-style-type: none"> 1. Check the RADIUS parameter settings in both the RADIUS server and in AXIS 9010 Web interface. 2. If you do not find any incorrect parameter settings, switch off the RADIUS function and try again to dial up your application. If you still cannot connect, check the other troubleshooting steps for more help.
<p>Authentication failure when you try to dial up and access other applications.</p>	<p>Your User ID and/or password are incorrect.</p>	<ol style="list-style-type: none"> 1. Make sure that you enter the correct User ID and password. 2. Check that your User ID is registered in the RADIUS server. 3. Check the RADIUS parameter settings in both the RADIUS server and AXIS 9010 Web interface.

Web Interface

Symptoms	Possible causes	Remedial actions
<p>The AXIS 9010 Web interface cannot be accessed from a Web browser.</p>	<p>The AXIS 9010 is not connected properly.</p>	<ol style="list-style-type: none"> 1. Check Power and Network indicator. 2. Check that assignment of IP addresses for the AXIS 9010 and for <i>Bluetooth</i> clients is correct. 3. To further check the IP addresses, run the Ping command from another computer as described in "IP address check" at the end of this chapter. Follow the appropriate recommendations.
	<p>Problem with your proxy server.</p>	<p>Verify the proxy server setting in your Web browser.</p>
	<p>Other networking problems.</p>	<ol style="list-style-type: none"> 1. Verify that your network is accessible through your network socket. 2. Verify that your network cable is functional.

IP Address Check

By sending a data packet to a specific IP address and waiting for a reply, Ping can determine whether that IP address is accessible. Ping can also help you determine IP address conflicts with your AXIS 9010 and troubleshoot TCP/IP problems on the network. Follow the instructions below in association with Symptoms/Possible causes/Remedial actions when diagnosing your problem.

Ping Command:

1. Start a DOS window or a UNIX shell.
2. Type "ping x.x.x.x", where x.x.x.x is the IP address you want to check - for example the IP address of your AXIS 9010.
3. Subsequent replies will provide an explanation of the cause of the problem. Replies from DOS can be interpreted as defined in the table below (for UNIX replies please refer to page 18):

Ping Reply	Interpretation and recommendation	
	AXIS 9010 connected	AXIS 9010 disconnected
bytes = 32 time = 2 ms..... - or something similar	The AXIS 9010 is responding correctly. There are probably no conflicts with the IP address - disconnect the AXIS 9010 and ping again to verify.	The IP address is already used and cannot be used again. You must obtain a new IP address for your AXIS 9010.
destination host unreachable	The AXIS 9010 is not accessible. Check your network settings.	-----
request timed out	The IP address is not in use. You are either pinging the wrong IP address or your AXIS 9010 does not have the correct IP address.	This IP address is not used by anyone and is available for use for your AXIS 9010. Set the IP address again, power on the AXIS 9010 and then try accessing the unit.
no response from ping command	The AXIS 9010 is not accessible. Check your network settings.	-----

Note:

Please visit www.axis.com for more support and additional help through the FAQ database or to fill in and mail a problem form.

Appendix C - Parameters

This section provides you with an overview of all parameters in the AXIS 9010.

Security Web Interface and FTP session

- Password

Security Bluetooth Radio Link

- Bluetooth Passkey
- Store the link key

Network

- Host name
- IP address assignment
- IP address
- Subnet mask
- Default gateway
- Domain name
- Primary DNS server
- Secondary DNS server
- Primary WINS server
- Secondary WINS server

Bluetooth

- Bluetooth Device Name
- IP addresses assignment
- Masquerading range
- Manual range

RADIUS

- Authentication (RADIUS) activation
- Retransmissions
- Timeout

- Primary Server
- Primary Authentication port number
- Primary Accounting port number
- Secondary Server
- Secondary Authentication port number
- Secondary Accounting port number

SNMP

- SNMPv1 activation
- SNMPv3 activation
- Read community
- Write community
- UserID
- Password
- Trap community
- Trap address
- Trap port number
- Trap on Authentication failure

Appendix D - Definition of Terms and Abbreviations

The most needed phrases are described in brief here. For a full glossary please refer to the Web interface.

ARP

ARP (Address Resolution Protocol) is an Internet protocol that allows a host to find the physical address of a node on the same network when only the logical IP address of the node is known. An ARP request is broadcasted onto the network, and the node with that IP address sends back its hardware address.

Access Point Name

To more easily find your AXIS 9010 in scanning lists the first part of the *Bluetooth* Device Name, the Access Point name, is by default set to "AXIS 9010".

Bluetooth Device Address

An address set at the factory and a specific identity for the device (not to be confused with the IP address). In most cases, you can find the *Bluetooth* Device Address somewhere on your *Bluetooth* device.

Bluetooth Device Name

The *Bluetooth* Device Name is the name that a *Bluetooth* device presents itself with. By default, the *Bluetooth* Device Name for your AXIS 9010 is "AXIS 9010 (<IP address>".

Bluetooth Passkey

The *Bluetooth* Passkey is a security log on parameter you enter before you can set up a *Bluetooth* radio link.

Bluetooth Wireless Technology

Bluetooth wireless technology makes it possible to connect any compatible portable and stationary communication device without any cable. The technology is based on a radio link that offers transmissions of both voice and data. *Bluetooth* wireless technology operates on local mobile systems and local networks using radio transmissions.

DHCP

DHCP (Dynamic Host Configuration Protocol) is a protocol that lets network administrators centrally manage and automate the assignment of Internet Protocol addresses in a network. Using the Internet's set of protocol (TCP/IP), each machine that can connect to the Internet needs a unique IP address. When users want to access the Internet, an IP address must be assigned to each unit.

DNS Server

DNS servers translate Internet domain names and Host names to IP addresses on your network. If you choose to set the AXIS 9010's IP address manually, you can specify the address to the Primary and Secondary DNS server.

Domain Name

A Domain is a set of computers on a network that have been assigned a group name. If you have chosen to set the IP address for the AXIS 9010 manually, you can specify the Domain Name to which the AXIS 9010 belongs.

Gateway

A gateway is a network point that acts as an entrance to another network. If you choose to set the IP address for the AXIS 9010 manually and wish to access the Internet, you must specify the Default gateway.

IP Address

In the most widely installed level of the Internet Protocol (IP) today, an IP address is a 32-bit binary digit number that identifies each sender or receiver of information that is sent in a packet across the Internet.

IP Masquerading

A firewall or router performs IP Masquerading if it changes the source IP address and port number on every packet that originates from one side of the client before forwarding that packet to the other side. Returned packets are similarly translated, so that they return to the internal machine which initiated a connection. IP Masquerading is a popular method for hiding a protected IP address space from the Internet. Internal users access services on the Internet as usual, but Internet services only see connections that originate on the firewall or the router. IP Masquerading uses almost the same method for IP translation as NAT, except that masquerading also uses the port number in the translation.

ISP

An ISP (Internet service provider) is a company that provides access to the Internet and other related services.

Link key

The link key is partly based on the Bluetooth Passkey and is created and exchanged as authentication when establishing connection between *Bluetooth* devices.

MAC Address

On a local area network or other networks, the MAC (Media Access Control) address is your computer's unique hardware number, the physical address.

Ping

Ping (Packet Internet Groper) is a basic Internet program that lets you verify that a particular IP address exists and can accept requests. Ping can also be used with an operating host to see how long it takes to get a response. Ping sends a packet to a designated address and waits for a response. The computer acronym was contrived to match the submariners term for the sound of a returned sonar pulse.

RADIUS

RADIUS (Remote Authentication Dial-In User Service) is a protocol used by remote access servers for user authentication. User credentials are forwarded to a RADIUS server, which manages a credentials database. The RADIUS server carries out authentication. This delegation of the authenti-

cation process allows users to have a single set of credentials across all remote access servers. RADIUS is an encrypted protocol, and supports the encrypted exchange of credentials between the remote end-user and the authentication server.

Serial Number

The serial number is located on the underside label of the AXIS 9010. Please note that the serial number of your AXIS 9010 is identical to the unit's physical address (MAC address).

SNMP

SNMP (Simple Network Management Protocol) is a protocol that governs network management and the monitoring of network devices and their functions. SNMP refers to a set of standards for network management, including a protocol, a database structure specification and a set of data objects.

Subnet Mask

A network can be divided into one or more physical networks to form subnetworks. A subnet mask indicates which portion of the IP address that represents the subnetwork and the host address (the main network) respectively. If you choose to manually assign the IP address for your AXIS 9010, you can specify the subnet mask. To access the Internet, you must specify the Subnet mask. 255.255.255.0 is an example of a subnet mask. Consult your network administrator or your ISP to obtain the Subnet mask.

Web Interface

The AXIS 9010 includes a Web server and an internal Web interface. This means that you can browse to your AXIS 9010 Web interface using the IP address in the location field of your browser.

WINS Server

WINS (Windows Internet Naming Service) manages the association of workstation names and locations with the IP addresses. Its function resembles the DNS server.

Index

- A**
 - Access point name 27
 - Accounting 23, 27, 30
 - Accounting port number 27
 - ARP 17
 - Authentication 19, 23, 26, 27, 30
 - Authentication port number 27
 - Authorization 23
 - Automatic IP setting 16, 19, 23
 - AXIS 9010 IP setting 16, 25, 30
 - AXIS 9010 overview 15
 - Axis Communications 8
 - AXIS MIB 24

- B**
 - Bluetooth* client installation 36
 - Bluetooth* Device Name 27, 30
 - Bluetooth* Link key 26
 - Bluetooth* Passkey 7, 22, 26
 - Bluetooth* radio link security 22
 - Bluetooth* wireless technology 14

- C**
 - Client automatic IP setting 19
 - Client IP setting 19, 26
 - Client IP setting within a private network 19
 - Client Manual IP setting 21

- D**
 - Default settings 25

- E**
 - ETRAX 15

- F**
 - FTP 26, 29, 32
 - FTP security 22

- G**
 - Gateway 18, 30, 34

- H**
 - Host name 26, 30

- I**
 - Installing updated software 32
 - IP masquerading 19, 26

- L**
 - Linux 15

- M**
 - MAC address 16
 - Manual IP setting 16, 21
 - Masquerading range 26
 - Mobile Access 8
 - Mounting bracket 10

- N**
 - Network indicator 11, 12

- O**
 - Open BT 15

- P**
 - Password 7, 22, 26, 28, 29, 32, 34
 - Physical Description 11
 - Ping 17, 44
 - Power indicator 11, 12
 - Power supply 10

- Q**
 - Quick installation 6

- R**
 - Radio indicator 11, 12

RADIUS 19, 23, 26, 27, 30

Reset to factory default settings 34

Restart 34

Restore settings 34

S

Serial number 11, 16

SNMP 24, 27, 30

SNMPv1 24, 27, 30

SNMPv3 24, 30

Subnet mask 18, 30, 34

T

Thin Server 15

U

User ID 7, 22, 26, 28, 29, 32

W

Web interface security 22

Axis Communications Technical Support

AMERICA
support-us@axis.com

EUROPE, MIDDLE EAST AND AFRICA
support-se@axis.com

FRANCE
support-fr@axis.com

GERMANY
support-de@axis.com

SPAIN
support-es@axis.com

THE NETHERLANDS
support-nl@axis.com

UNITED KINGDOMS
support-uk@axis.com

ASIA-PACIFIC
support-sg@axis.com

JAPAN
info@axiscom.co.jp

TAIWAN
support-tw@axis.com



Axis 9010 – User's Manual
Part No: 18082
Revision: 1.0 Date: March 2001

www.axis.com

©2001 Axis Communications AB. Axis is a registered trademark, and ThinServer is a trademark of Axis Communications AB. The *BLUETOOTH* trademarks are owned by their proprietor and used by Axis Communications AB under licence. All other company names and products are trademarks or registered trademarks of their respective companies. We reserve the right to introduce modifications without notice.

AXIS[®]
COMMUNICATIONS