

AXIS W401 Body Worn Activation Kit

Automatic activation of body worn cameras

AXIS W401 Body Worn Activation Kit , with its small, streamlined form, this device fits seamlessly into tight spaces, simplifying installation wherever space is limited. It allows for automatic activation of recording on all body worn cameras within the same system, triggered by I/O inputs such as lightbar or siren activation, a panic button press, fire alarms, or any MQTT events ensuring critical moments are always captured during escalated incidents.

- > **Automatic recording activation**
- > **Triggered by I/O**
- > **Uses Bluetooth[®] beacons**



AXIS W401 Body Worn Activation Kit

System on chip (SoC)

Model
S6LM

Memory
1024 MB RAM, 8 GB Flash

Network

Network protocols

IPv4, IPv6 USGv6, ICMPv4/ICMPv6, HTTP, HTTPS¹, HTTP/2, TLS¹, QoS Layer 3 DiffServ, FTP, SFTP, SMTP, mDNS (Bonjour), UPnP®, SNMP v1/v2c/v3 (MIB-II), DNS/DNSv6, DDNS, NTP, NTS, TCP, UDP, IGMPv1/v2/v3, ICMP, DHCPv4/v6, ARP, SSH, LLDP, CDP, MQTT v3.1.1, Secure syslog (RFC 3164/5424, UDP/TCP/TLS), Link-Local address (ZeroConf)

System integration

Application Programming Interface

Open API for software integration, including VAPIX® and AXIS Camera Application Platform (ACAP); specifications at axis.com/developer-community. ACAP includes Native SDK.
One-click cloud connection

Event conditions

Device status: above/below/within operating temperature, IP address blocked/removed, network lost, new IP address, system ready, within operating temperature
I/O: Bluetooth® beacon signal received, digital input is active, manual trigger, virtual input is active
MQTT: MQTT client connected, stateless
Scheduled and recurring: schedule

Event actions

I/O: toggle I/O once, toggle I/O while the rule is active
LEDs: flash status LED, flash status LED while the rule is active
MQTT: send MQTT publish message
Notification: HTTP, HTTPS, TCP and email
Security: erase configuration
SNMP trap messages: send, send while the rule is active
Wireless: broadcast signal

Approvals

Product markings

CE, FCC, ICES, IFT, UL, MIC Telecom, NOM, RCM, VCCI, WEEE

Supply chain

TAA compliant

EMC

EN 55032 Class B, EN 55035, EN 61000-3-2, EN 61000-3-3, EN 61000-6-1, EN 61000-6-2, ECE R10 (E-mark)

Australia/New Zealand: RCM AS/NZS CISPR 32 Class B, CISPR 35

Canada: ICES-3(B)/NMB-3(B)

Japan: VCCI Class B

USA: FCC Part 15 Subpart B Class B

Safety

CAN/CSA C22.2 No. 62368-1 ed.3,
IEC/EN/UL 62368-1 ed.3, RCM AS/NZS 62368.1:2018

Environment

IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-64, IEC 60068-2-78,
IEC TR 60721-3-5 Class 5M3 (Vibration, Shock),
IEC/EN 61373 Category 1 Class B,
NEMA TS 2 (2.2.7-2.2.9)

Wireless

EN 300328, EN 300440, EN 301893, EN 303413, EN 301489-1, EN 301489-17, FCC Part 15 Subpart C, FCC Part 15 Subpart E, RSS-247, RSS-Gen Issue 5

Network

NIST SP500-267, IPv6 USGv6

Cybersecurity

FIPS 140, EN 18031-1

1. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (openssl.org), and cryptographic software written by Eric Young (eay@cryptsoft.com).

Cybersecurity

Edge security

Software: Signed OS, brute force delay protection
Hardware: Axis Edge Vault cybersecurity platform
Secure keystore: secure element (CC EAL 6+, FIPS 140-3 Level 3), system-on-chip security (TEE)
Axis device ID, secure boot, encrypted filesystem (AES-XTS-Plain64 256bit)

Network security

IEEE 802.1X (EAP-TLS, PEAP-MSCHAPv2)², IEEE 802.1AR
WPA/WPA2-PSK, WPA/WPA2-Enterprise (EAP-TLS, EAP-PEAP/MSCHAPv2)

Documentation

Axis Vulnerability Management Policy
Axis Security Development Model
AXIS OS Software Bill of Material (SBOM)
To download documents, go to axis.com/support/cybersecurity/resources
To read more about Axis cybersecurity support, go to axis.com/cybersecurity

General

Casing

Color: black NCS S 9000-N

Power

Power over Ethernet (PoE) IEEE 802.3af Type 1 Class 2
Typical 1.7 W, max 6.49 W or
10–28 VDC, typical 1.8 W, max 6.49 W

Connectors

Network: Shielded RJ45 10BASE-T/100BASE-TX PoE
I/O: 2 x 6-pin 2.5 mm terminal block for 8 x supervised configurable I/Os (12 V DC output, max load 50 mA)
Power: 3-pin terminal block for 10–28 VDC input

Wireless interface

Bluetooth® 5.1 Low Energy and Classic
Bluetooth profile: None
Wi-Fi® 5 a/b/g/n/ac @ 2.4 GHz, 5 GHz

Operating conditions

-20 °C to 60 °C (-4 °F to 140 °F)
Humidity 10–85% RH (non-condensing)

Storage conditions

-40 °C to 65 °C (-40 °F to 149 °F)
Humidity 5–95% RH (non-condensing)

Dimensions

For the product dimensions, see the dimension drawings in this datasheet.

Weight

166 g (0.4 lb)

Box content

AXIS W401 Body Worn Activation Kit
Installation guide
DC connector
I/O connectors
Cable ties
Velcros

Languages

English, German, French, Spanish, Italian, Russian, Simplified Chinese, Japanese, Korean, Portuguese, Polish, Traditional Chinese, Dutch, Czech, Swedish, Finnish, Turkish, Thai, Vietnamese

Warranty

5-year warranty, see axis.com/warranty

Part numbers

Available at axis.com/products/axis-w401-body-worn-activation-kit#part-numbers

Sustainability

Substance control

PVC free, BFR/CFR free in accordance with JEDEC/ECA Standard JS709
RoHS in accordance with EU RoHS Directive 2011/65/EU and 2015/863, and standard EN IEC 63000:2018
REACH in accordance with (EC) No 1907/2006. For SCIP UUID, see echa.europa.eu


Materials

Renewable carbon-based plastic content: bio-based: 70%
Screened for conflict minerals in accordance with OECD guidelines
To read more about sustainability at Axis, go to axis.com/about-axis/sustainability

Environmental responsibility

axis.com/environmental-responsibility
Axis Communications is a signatory of the UN Global Compact, read more at unglobalcompact.org

2. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (openssl.org), and cryptographic software written by Eric Young (ey@cryptsoft.com).

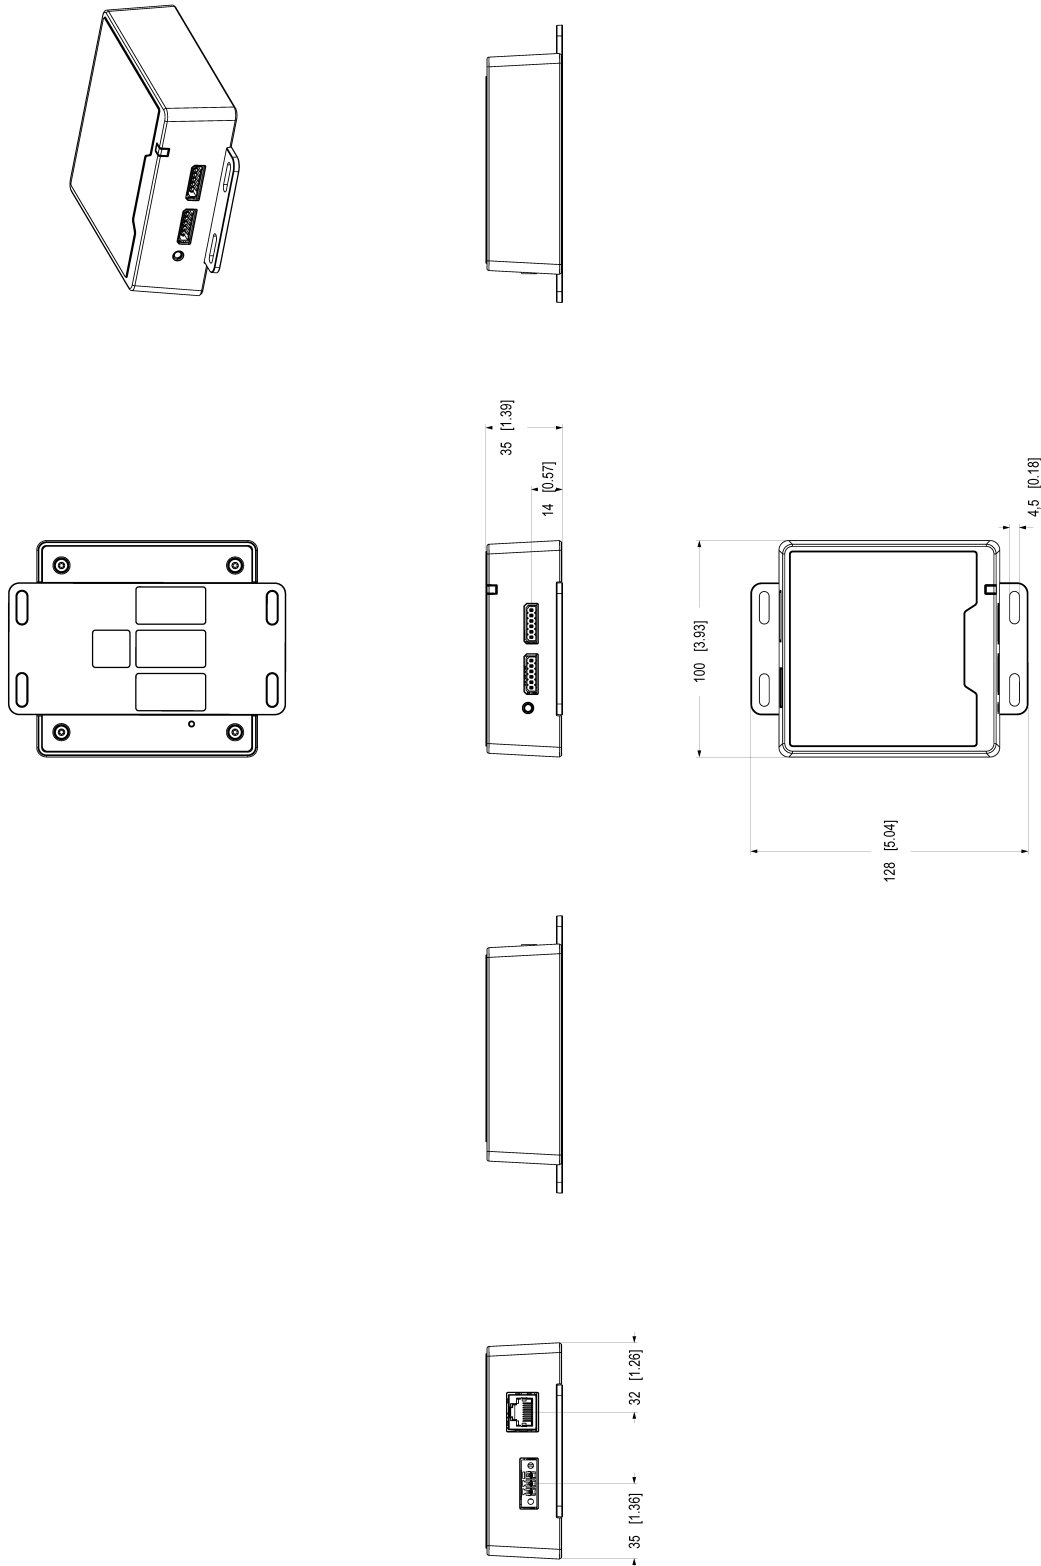

Dimensions (mm [inch])	Unit
2024 Rev. 11	M 1
31/10/24	A 1

AXIS W401 Body Worm Activation Kit

