


## AXIS T94S02L Recessed Mount

Swift and effortless ceiling installation

AXIS T94S02L Recessed Mount enables sleek, elegant and discreet recessed ceiling installations of indoor Axis fixed dome cameras. It features a patent-pending single-screw ceiling attachment design, which makes the installation quick and easy without having to remove the ceiling tile. Axis fixed dome camera attached to the recessed mount is embedded into the ceiling, revealing only the camera dome and the low-profile cover ring.

- > **Cost-effective mount for Axis fixed dome cameras**
- > **Recessed ceiling installation made quick and easy**
- > **Enables sleek and discreet video surveillance**

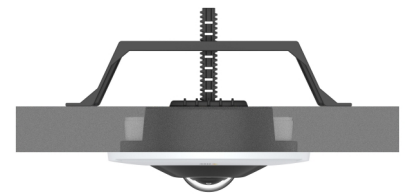

## AXIS T94S02L Recessed Mount

General	
<b>Supported products</b>	AXIS M3057-PLVE AXIS M3058-PLVE
<b>Casing</b>	Material: plastic Color: white NCS S 1002-B
<b>Sustainability</b>	PVC free
<b>Mounting</b>	Recessed in ceilings or walls
<b>Environment</b>	Indoor
<b>Storage conditions</b>	-40 °C to 65 °C (-40 °F to 149 °F)
<b>Approvals</b>	<b>Safety</b> IEC/EN/UL 62368-1 <b>Environment</b> IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-27, IEC/EN 62262 IK08, REACH, WEEE
<b>Dimensions</b>	<b>Height inside ceiling/wall:</b> 126 mm (4 61/64 in)
	<b>Height outside ceiling/wall (including camera):</b> 37 mm (1 29/64 in) <b>Diameter outside ceiling/wall:</b> ø 179 mm (7 3/64 in) <b>Diameter cut-out in ceiling/wall:</b> ø 160 mm (6 19/64 in)
	<b>Weight</b> 292 g (0.64 lb)
	<b>Maximum load</b> 1 kg (2.2 lb)
	<b>Included accessories</b> Installation guide
	<b>Optional accessories</b> AXIS Safety Wire 3 m For more accessories, see <a href="http://axis.com">axis.com</a>
	<b>Warranty</b> 3-year warranty, see <a href="http://axis.com/warranty">axis.com/warranty</a>

Environmental responsibility:

[axis.com/environmental-responsibility](http://axis.com/environmental-responsibility)