

AXIS P3737-PLE Panoramic Camera

4x 5 MP multidirectional with deep learning

This multidirectional camera offers four channels with 5 MP per channel to deliver excellent overviews and detailed coverage. It includes 360° IR illumination for clear, reflection-free footage and excellent image quality even in low light or complete darkness. This flexible camera offers various mounting options. For instance, it can be recessed mounted for discreet surveillance or mounted in ceilings for complete 360° coverage. With highly efficient power consumption, it ensures lower operating costs. It also supports powerful analytics based on deep learning. Furthermore, Axis Edge Vault, a hardware-based cybersecurity platform, guarantees the device's integrity and protects it from unauthorized access.

- > [4x 5 MP at 20 fps per channel](#)
- > [360° IR illumination with individually controlled LEDs](#)
- > [Flexible mounting options](#)
- > [Support for advanced analytics](#)
- > [Axis Edge Vault safeguards the device](#)




AXIS P3737-PLE Panoramic Camera

Camera		System integration	
Image sensor	4x 1/2.7" progressive scan RGB CMOS Pixel size 2.0 µm	Application Programming Interface	Open API for software integration, including VAPIX®, metadata and AXIS Camera Application Platform (ACAP); specifications at axis.com/developer-community . ACAP includes Native SDK and Computer Vision SDK. One-click cloud connection ONVIF® Profile G, ONVIF® Profile M, ONVIF® Profile S, and ONVIF® Profile T, specifications at onvif.org
Lens	Varifocal, 3.2–8.1 mm, F1.9–3.2 Horizontal field of view: 99°–37° Vertical field of view: 70°–28° Diagonal field of view: 134°–47° Minimum focus distance: 0.5 m (1.6 ft) Fixed iris, IR corrected, remote zoom and focus	Video management systems	Compatible with AXIS Companion, AXIS Camera Station, video management software from Axis' Application Development Partners available at axis.com/vms
Day and night	Automatic IR-cut filter	Onscreen controls	Autofocus Video streaming indicator IR illumination Privacy masks Media clip
Minimum illumination	Color: 0.19 lux at 50 IRE, F1.9 B/W: 0 lux at 50 IRE, F1.9 0 lux with IR illumination on	Edge-to-edge	Speaker pairing
Shutter speed	5 MP and WDR on: 1/28000 s to 1/5 s Quad HD and WDR on: 1/33500 s to 1/5 s WDR off: 1/50000 s to 1/5 s	Event conditions	Device status: above operating temperature, above or below operating temperature, below operating temperature, within operating temperature, IP address removed, new IP address, network lost, system ready, live stream active, casing open Edge storage: recording ongoing, storage disruption, storage health issues detected I/O: manual trigger, virtual input MQTT: stateless Scheduled and recurring: schedule Video: average bitrate degradation, day-night mode, tampering
Camera angle adjustment	Pan ±90°, tilt +25 to +95°, rotation -5° to +95°, twist ±20°	Event actions	Day-night mode Illumination: use lights, use lights while the rule is active MQTT: publish Notification: HTTP, HTTPS, TCP, and email Overlay text Recordings: record, record while the rule is active SNMP traps: send, send while the rule is active Status LED: flash, flash while the rule is active Upload of images or video clips: FTP, SFTP, HTTP, HTTPS, network share, and email
System on chip (SoC)		Built-in installation aids	Remote zoom and focus, pixel counter, barrel distortion correction
Model	ARTPEC-8	Analytics	
Memory	4096 MB RAM, 8192 MB Flash	Applications	Included AXIS Object Analytics, Scene metadata, AXIS Video Motion Detection, active tampering alarm Supported Support for AXIS Camera Application Platform enabling installation of third-party applications, see axis.com/acap
Compute capabilities	Deep learning processing unit (DLPU)	Multisensor analytics	4 channels analytics support ^b
Video		AXIS Object Analytics	Object classes: humans, vehicles (types: cars, buses, trucks, bikes, other) Scenarios: line crossing, object in area, time in area, crossline counting, occupancy in area Up to 8 scenarios Other features: triggered objects visualized with trajectories, and color-coded bounding boxes and tables Polygon include/exclude areas Perspective configuration ONVIF Motion Alarm event
Video compression	H.264 (MPEG-4 Part 10/AVC) Baseline, Main and High Profiles H.265 (MPEG-H Part 2/HEVC) Main Profile Motion JPEG	Scene metadata	Object classes: humans, faces, vehicles (types: cars, buses, trucks, bikes), license plates Confidence, position Object attributes: vehicle color, upper/lower clothing color, confidence, position
Resolution	4:3 4x 2592x1944 (4x 5 MP) to 4x 320x240 16:9 4x2560x1440 (4x Quad HD) to 4x 320x180	Approvals	
Frame rate	5 MP: Up to 20/20 fps (50/60 Hz) in all resolutions Quad HD: Up to 25/30 fps (50/60 Hz) in all resolutions	Product markings	CSA, UL/cUL, UKCA, CE, KC, EAC, VCCI, RCM
Video streaming	Multiple, individually configurable streams in H.264, H.265 and Motion JPG Axis Zipstream technology in H.264 and H.265 Controllable frame rate and bandwidth VBR/ABR/MBR H.264/H.265 Low latency mode Video streaming indicator	Supply chain	TAA compliant
Signal-to-noise ratio	>55 dB	EMC	CISPR 35, CISPR 32 Class A, EN 55035, EN 55032 Class A, EN 50121-4, EN 61000-3-2, EN 61000-3-3, EN 61000-6-1, EN 61000-6-2 Australia/New Zealand: RCM AS/NZS CISPR 32 Class A Canada: ICES-3(A)/NMB-3(A)
WDR	Forensic WDR: Up to 120 dB depending on scene		
Noise reduction	Spatial filter (2D noise reduction) Temporal filter (3D noise reduction)		
Image settings	Saturation, contrast, brightness, sharpness, white balance, day/night threshold, local contrast, tone mapping, exposure mode, exposure zones, barrel distortion correction, compression, rotation: 0°, 90°, 180°, 270° including corridor format, mirroring, text and image overlay, dynamic text and image overlay, privacy masks, polygon privacy mask		
Image processing	Forensic WDR, Lightfinder, OptimizedIR		
Audio			
Audio input/output	Audio features through portcast technology: two-way audio connectivity with AXIS T61 Mk II		
Audio streaming	Two-way (half duplex, full duplex) via network speaker pairing technology		
Network			
Network protocols	IPv4, IPv6 USGv6, ICMPv4/ICMPv6, HTTP, HTTPS ^a , HTTP/2, TLS ^a , QoS Layer 3 DiffServ, FTP, SFTP, CIFS/SMB, SMTP, mDNS (Bonjour), UPnP [®] , SNMP v1/v2c/v3 (MIB-II), DNS/DNSv6, DDNS, NTP, NTS, RTSP, RTP, SRTP/RTSPS, TCP, UDP, IGMPv1/v2/v3, RTCP, ICMP, DHCPv4/v6, ARP, SSH, LLDP, CDP, MQTT v3.1.1, Secure syslog (RFC 3164/5424, UDP/TCP/TLS), Link-Local address (ZeroConf), IEEE 802.1X (EAP-TLS), IEEE 802.1AR		

	<p>Japan: VCCI Class A Korea: KS C 9835, KS C 9832 Class A USA: FCC Part 15 Subpart B Class A Railway: IEC 62236-4</p>	<p>Support for SD card encryption (AES-XTS-Plain64 256bit) Recording to network-attached storage (NAS) For SD card and NAS recommendations see axis.com</p>	
Safety	CAN/CSA C22.2 No. 62368-1 ed. 3, IEC/EN/UL 62368-1 ed. 3, IEC/EN 62471 risk group exempt, IS 13252, RCM AS/NZS 62368.1:2022,	Operating conditions -30 °C to 50 °C (-22 °F to 122 °F) Humidity 10–100% RH (condensing) Maximum temperature according to NEMA TS 2 (2.2.7): 74 °C(165 °F)	
Environment	IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78, IEC/EN 60529 IP66/IP67, IEC/EN 62262 IK09, ISO 21207 (Method B), MIL-STD-810H (Method 501.7, 502.7, 505.7 506.6, 507.6 509.7, 512.6), NEMA 250 Type 4X, NEMA TS 2 (2.2.7-2.2.9), VDMA 24364	Storage conditions -40 °C to 65 °C (-40 °F to 149 °F) Humidity 5–95% RH (non-condensing)	
Network	NIST SP500-267, IPv6 USGv6	Dimensions For the overall product dimensions, see the dimension drawing in this datasheet. Effective Projected Area (EPA): 0.022 m ² (0.24 ft ²)	
Cybersecurity	ETSI EN 303 645, FIPS 140	Weight 2 kg (4.4 lb)	
Cybersecurity			
Edge security	<p>Software: Signed firmware, brute force delay protection, digest authentication, password protection Hardware: Axis Edge Vault cybersecurity platform TPM 2.0 (CC EAL4+, FIPS 140-2 Level 2), secure element (CC EAL 6+), system-on-chip security (TEE), Axis device ID, secure keystore, signed video, secure boot, encrypted filesystem (AES-XTS-Plain64 256bit)</p>	Box content Camera, installation guide, connector guard, cable gaskets	
Network security	IEEE 802.1X (EAP-TLS) ^a , IEEE 802.1AR, HTTPS/HSTS ^a , TLS v1.2/v1.3 ^a , Network Time Security (NTS), X.509 Certificate PKI, IP address filtering	Optional accessories AXIS TP3105-E Pendant Kit Black, AXIS TP3204-E Recessed Mount, AXIS TP3832-E Dome Smoked, AXIS TP3833-E Dome Casing Black, AXIS T94N01D Pendant Kit, AXIS TP3004-E Wall Mount Black, AXIS T8415 Wireless Installation Tool AXIS Surveillance Cards For more accessories, go to axis.com/products/axis-p3737-ple#accessories	
Documentation	<p><i>AXIS OS Hardening Guide</i> <i>Axis Vulnerability Management Policy</i> <i>Axis Security Development Model</i> AXIS OS Software Bill of Material (SBOM) To download documents, go to axis.com/support/cybersecurity/resources To read more about Axis cybersecurity support, go to axis.com/cybersecurity</p>	System tools AXIS Site Designer, AXIS Device Manager, product selector, accessory selector, lens calculator Available at axis.com	
General			
Casing	IP66-, IP67-, NEMA 4X- and IK09-rated Polycarbonate hard-coated dome Aluminum and plastic casing, polycarbonate (PC) dome Color: white NCS S 1002-B For repainting instructions, go to the product's support page. For information about the impact on warranty, go to axis.com/warranty-implication-when-repainting .	Languages English, German, French, Spanish, Italian, Russian, Simplified Chinese, Japanese, Korean, Portuguese, Polish, Traditional Chinese, Dutch, Czech, Swedish, Finnish, Turkish, Thai, Vietnamese	
Mounting	Mounting bracket with junction box holes (double-gang, single-gang, 4" square, and 4" octagon) ½" (M20) conduit side entry	Warranty 5-year warranty, see axis.com/warranty	
Power	Power over Ethernet (PoE) IEEE 802.3at Type 2 Class 4 IR illumination on: class 4, typical 13.25 W, max 23.30 W IR illumination off: class 3, typical 6.80 W, max 12.32 W	Part numbers Available at axis.com/products/axis-p3737-ple#part-numbers	
Connectors	Network: Shielded RJ45 10BASE-T/100BASE-TX/1000BASE-T PoE	Sustainability	
IR illumination	Optimized IR with power-efficient, long-life 850 nm IR LEDs Range of reach 15m (49.2 ft) or more depending on the scene	Substance control PVC free, BFR/CFR free in accordance with JEDEC/ECA Standard JS709 RoHS in accordance with EU RoHS Directive 2011/65/EU and EN 63000:2018 REACH in accordance with (EC) No 1907/2006. For SCIP UUID, see echa.europa.eu	
Storage	Support for microSD/microSDHC/microSDXC card	Materials Renewable carbon-based plastic content: 17% (recycled: 9%, bio-based: 1%, carbon capture based: 7%) Screened for conflict minerals in accordance with OECD guidelines To read more about sustainability at Axis, go to axis.com/about-axis/sustainability	
		Environmental responsibility axis.com/environmental-responsibility Axis Communications is a signatory of the UN Global Compact, read more at unglobalcompact.org	

- a. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (openssl.org), and cryptographic software written by Eric Young (ey@cryptsoft.com).
b. For more information, go to the User manual on axis.com.

Dimension drawing

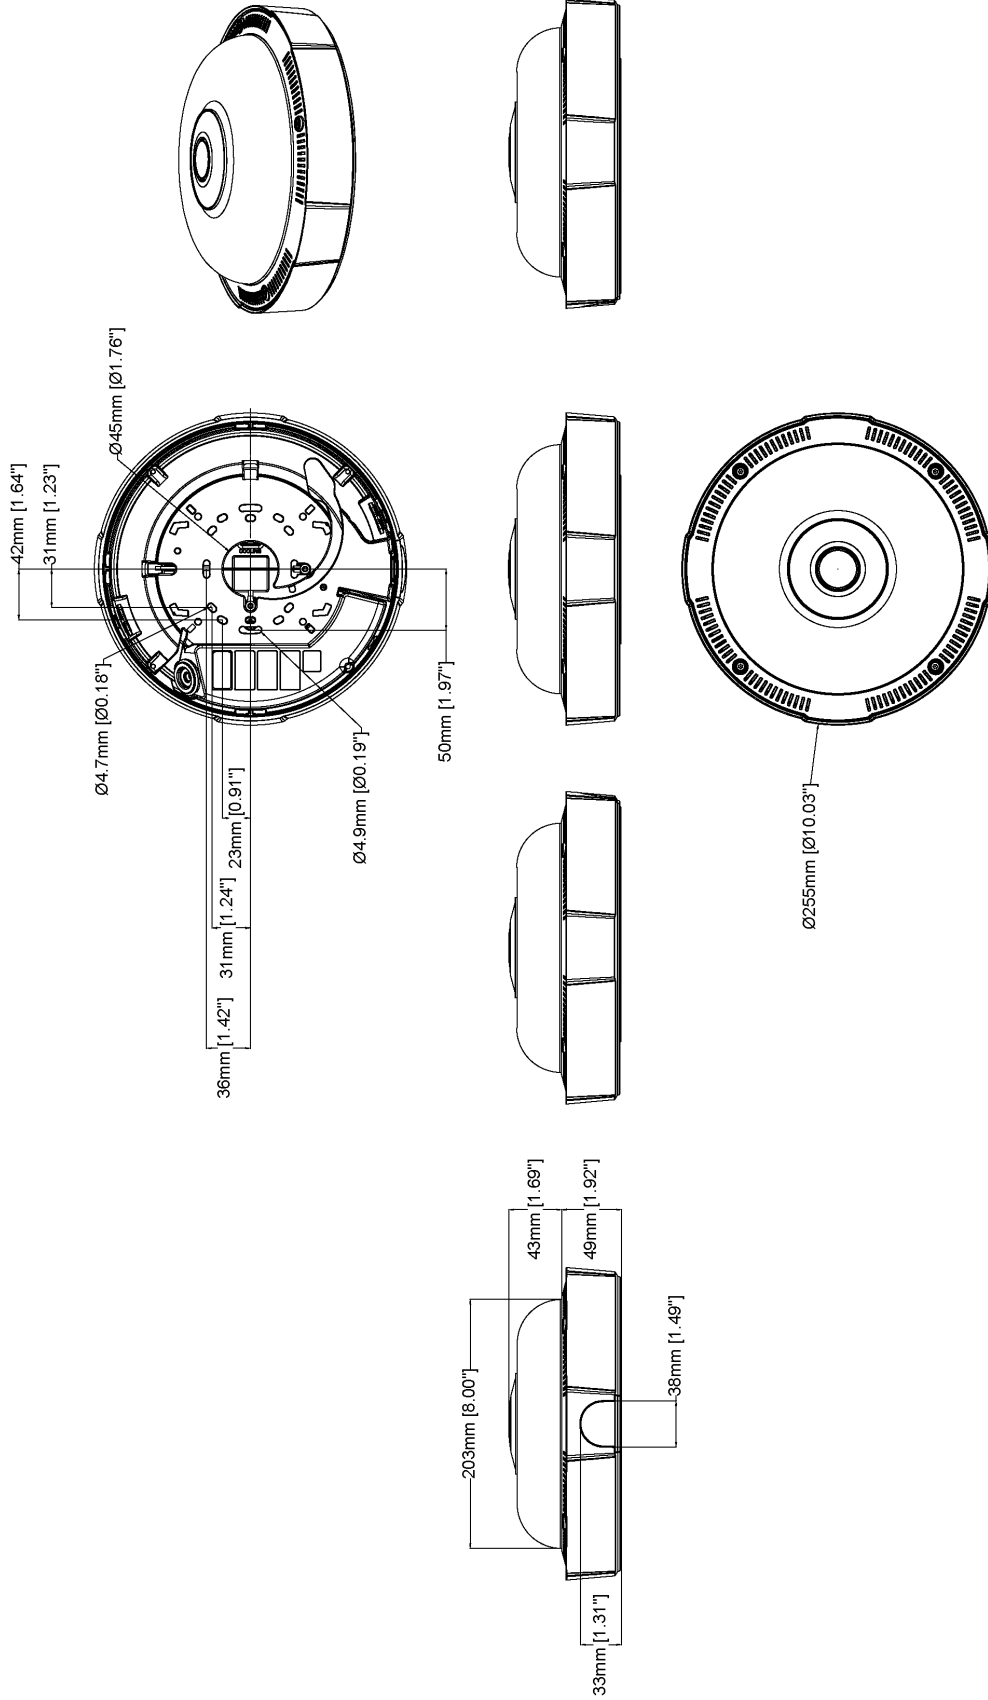

AXIS P3737-PLE Panoramic Camera

Revision	v.01	Revision date	2023-05-15
Paper size	A4	Release date	2023-05-15
Created by	MF	Scale	1:5

© 2023 Axis Communications

www.axis.com

Highlighted capabilities

AXIS Object Analytics

AXIS Object Analytics is a preinstalled, multifeatured video analytics that detects and classifies humans, vehicles, and types of vehicles. Thanks to AI-based algorithms and behavioral conditions, it analyzes the scene and their spatial behavior within – all tailored to your specific needs. Scalable and edge-based, it requires minimum effort to set up and supports various scenarios running simultaneously.

Axis Edge Vault

Axis Edge Vault is the hardware-based cybersecurity platform that safeguards the Axis device. It forms the foundation that all secure operations depend on and offers features to protect the device's identity, safeguard its integrity from factory and protect sensitive information from unauthorized access.

Establishing the root of trust starts at the device's boot process. In Axis devices, the hardware-based mechanism **secure boot** verifies the operating system (AXIS OS) that the device is booting from. AXIS OS, in turn, is cryptographically signed (**signed firmware**) during the build process. Secure boot and signed firmware tie into each other and ensure that the firmware has not been tampered with during the lifecycle of the device and that the device only boots from authorized firmware. This creates an unbroken chain of cryptographically validated software for the chain of trust that all secure operations depend on.

From a security aspect, the **secure keystore** is the critical building-block for protecting cryptographic informa-

tion used for secure communication (IEEE 802.1X, HTTPS, Axis device ID, access control keys etc..) against malicious extraction in the event of a security breach. The secure keystore is provided through a Common Criteria and/or FIPS 140 certified hardware-based cryptographic computing module. Depending on security requirements, an Axis device can have either one or multiple such modules, like a TPM 2.0 (Trusted Platform Module) or a secure element, and/or a system-on-chip (SoC) embedded Trusted Execution Environment (TEE).

Signed video ensures that video evidence can be verified as untampered without proving the chain of custody of the video file. Each camera uses its unique video signing key, which is securely stored in the secure keystore, to add a signature into the video stream. This allows video to be traced back to the Axis camera from where it originated, so it's possible to verify that the footage has not been tampered with after it left the camera.

To read more about Axis Edge Vault, go to axis.com/solutions/edge-vault.

Zipstream

The Axis Zipstream technology preserves all the important forensic in the video stream while lowering bandwidth and storage requirements by an average of 50%. Zipstream also includes three intelligent algorithms, which ensure that relevant forensic information is identified, recorded, and sent in full resolution and frame rate.

For more information, see axis.com/glossary