

AXIS T93F10 Outdoor Housing

Robust and sleek housing with smart features

AXIS T93F10 supports IP66 and NEMA 4X rating against the ingress of dust and water, and IK10 rating for protection against impact and vandal acts. The installer-friendly, lightweight plastic casing protects from corrosion. All cables are protected inside the wall mount to enhance vandal protection and remove the risk of solar degradation. Arctic Temperature Control ensures that the camera can start up even at -40 °C (-40 °F) following a power failure. AXIS T93F10 features a terminal connector for AC/DC power. A slot is dedicated for an optional intrusion alarm switch. It comes with a wall mount and an integrated sun cap.

- > **AC/DC power connection**
- > **Protection against water, dust and corrosion**
- > **Impact resistant**
- > **Lightweight**
- > **Included wall mount**



AXIS T93F10 Outdoor Housing

Supported products

AXIS P13 Series
AXIS Q16 Series
AXIS M1124/M1125

Casing

IP66-, IP67- and NEMA 4X-rated, IK10 impact-resistant polymer enclosure
Color: White NCS S 1002-B

Power

12-28 V DC, max 25 W
20-24 V AC, max 29 VA (Power supply not included)

Connectors

Terminal connector for AC/DC power

Environment

Indoor/outdoor

Operating conditions

AXIS P1353/P1354/P1355/P1357 and AXIS Q1604/
Q1614:

-40 °C to 50 °C (-40 °F to 122 °F)

AXIS P1365 and AXIS Q1615/Q1635:

-40 °C to 55 °C (-40 °F to 131 °F)

AXIS Q1645/Q1647:

-40 °C to 40 °C (-40 °F to 104 °F)

AXIS M1124/M1125:

-40 °C to 55 °C (-40 °F to 131 °F)

Approvals

EN 50581, IEC/EN/UL 60950-1, IEC/EN/UL 60950-22,
IEC/EN 60529 IP66, IEC/EN 60529 IP67,
NEMA 250 Type 4X, IEC 60721-4-3 Class 4M4,
IEC 60068-2-6, IEC 60068-2-27, IEC/EN 62262 IK10
EN 50121-4, EN 61000-3-2, EN 61000-3-3,
EN 61000-6-1, EN 61000-6-2, EN 55024,
KCC KN22 Class B, KN24, EN 62236-4
EN 55022 Class A, FCC Part 15 Subpart B Class A,
ICES-003 Class A, VCCI Class A,
RCM AS/NZS CISPR 22 Class A

Weight

1.2 kg (2.6 lb)

Dimensions

155 x 120 x 400 mm (6.1 x 4.8 x 15.7 in)

Sustainability

PVC free, BFR/CFR free

Included accessories


AXIS T94Q01A Wall Mount
Gaskets C M20
Internal power cable
2 pin plug connector for AC/DC power cable
Screw bit T30, Installation Guide
Required tool: Torx® T20 screw driver (not included)

Optional accessories

AXIS T91A47 Pole Mount
AXIS Sunshield A
AXIS Corridor Format Bracket A/B
AXIS Bird Control Spike

Warranty

Axis 3-year warranty, see www.axis.com/warranty

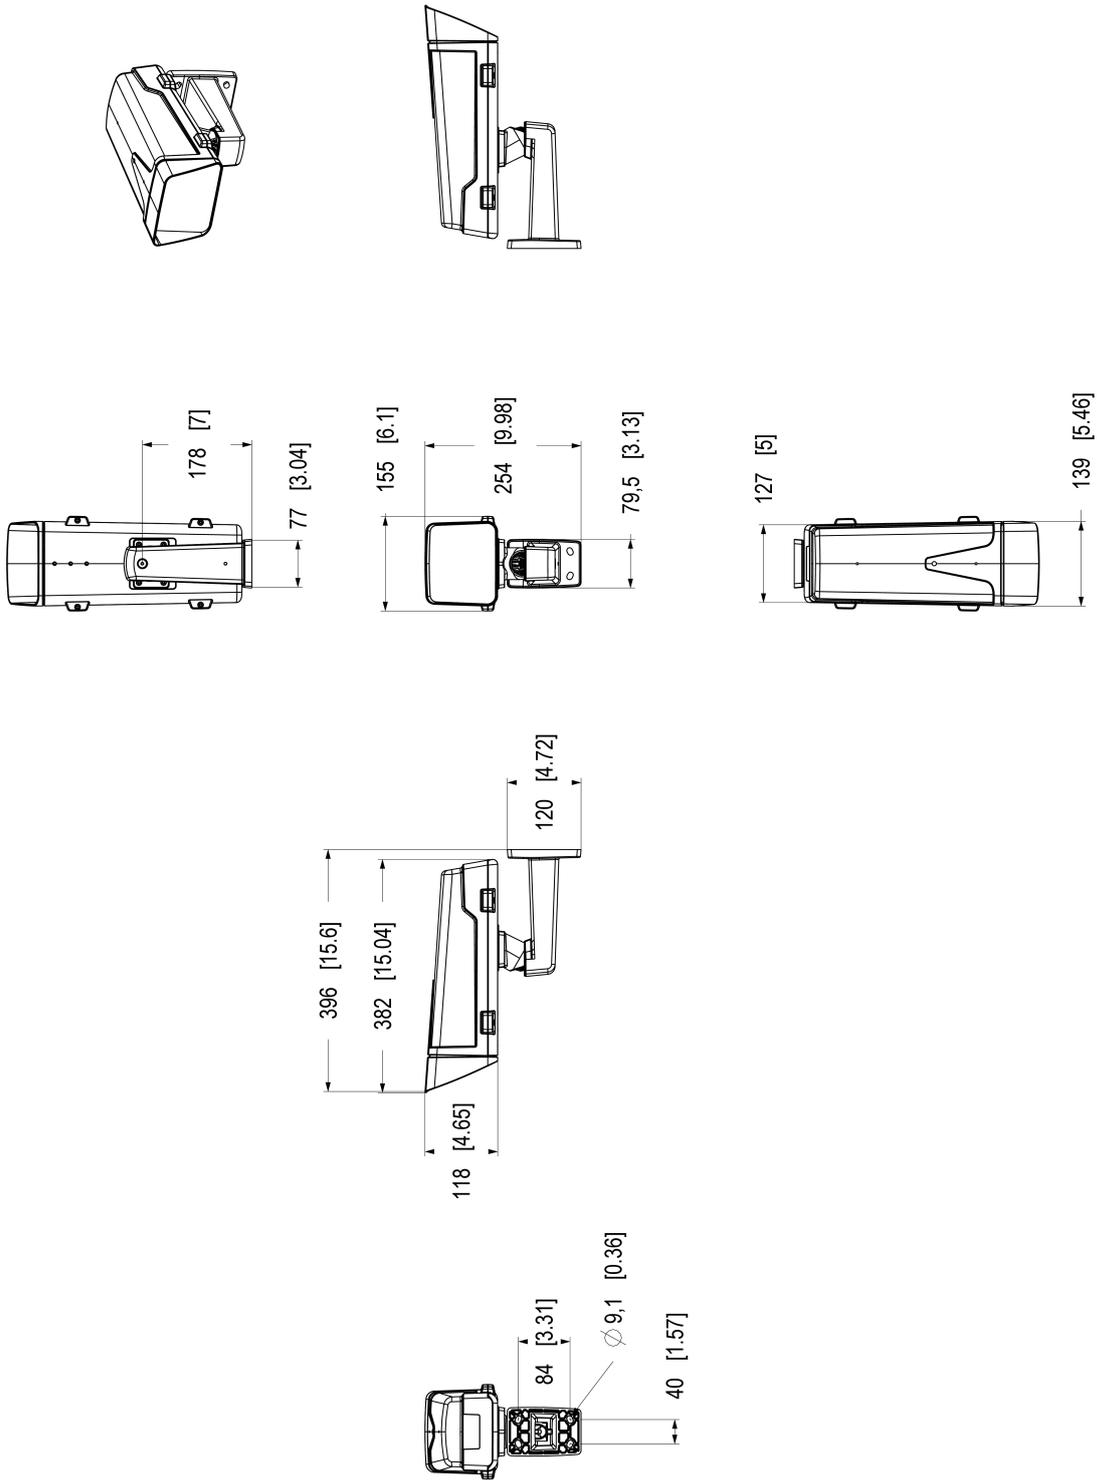

Dimensions in mm [inch]			
Drawn	Scale	Year	Rev
05.11.21	1:1	2021	1
3305776			
		AZ	1(1)

AXIS T93F10 Outdoor Housing



© 2025 Axis Communications AB. All rights reserved.