

## **AXIS TQ1003-E Wall Mount**

## For outdoor fixed box cameras and housings

Highly robust and rotatable wall mount, made of aluminum, and compatible with all Axis outdoor fixed box cameras and housings. Corrosion tested according to NEMA 4X, UL listed and IK10 rated. When used together with AXIS T94R01P Conduit Back Box, the Ethernet cable can be routed through cable protection pipes/conduits along the wall (from the left or right).

- > Highly robust wall mount
- > Rotatable
- > Flexible cable routing
- > IK10 Rated
- > Aluminium




## **AXIS TQ1003-E Wall Mount**

General	
Compatible products	For a list of compatible products, see axis.com/products/axis-tq1003-e-wall-mount#compatible-products
Maximum load	7 kg (15.4 lb)
Angle	Pan: ±100° Tilt: +10 to -65° Rotation: ±5°
Environment	Indoor and outdoor
Cable routing	Internal
Material	Powder coated, chromate aluminum Color: white NCS S 1002-B

Sustainability	PVC free
Approvals	Environment IEC/EN 60529 IP66/67, IEC/EN 62262 IK10, NEMA 250 Type 4X
Dimensions	210 x 80 x 140 mm (8.3 x 3.1 x 5.5 in) Effective Projected Area (EPA): 0.011 m² (0.118 ft²)
Weight	695 g (1.5 lb)
Box content	Wall mount, installation guide
Required accessories	TORX® T30 bit
Warranty	3-year warranty, see axis.com/warranty

www.cxis.com T10179975/EN/M2.2/2211

## Dimension drawing

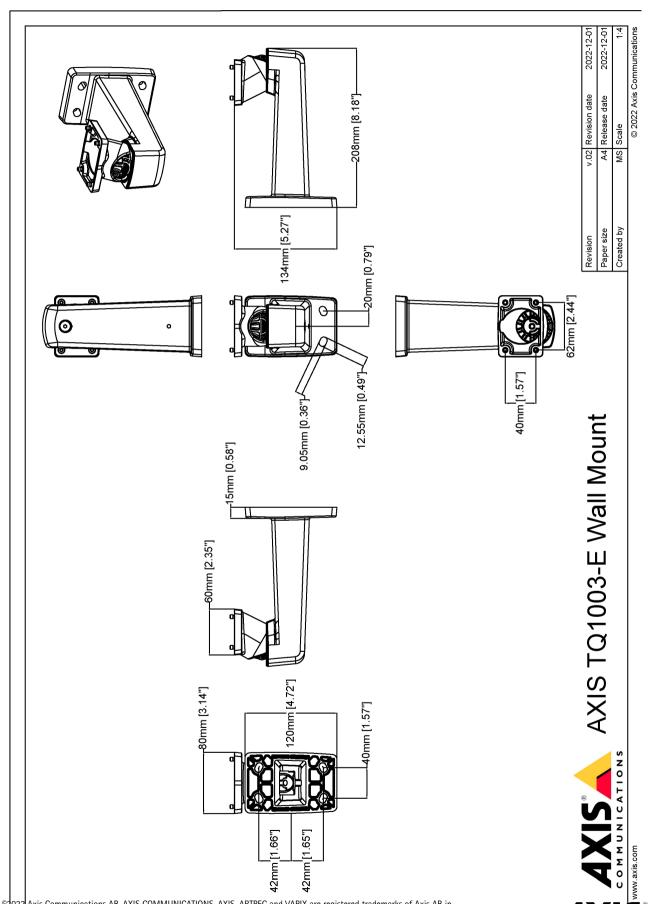

COMMUNICATIONS

© 2022 Axis Communications AB AXIS COMMUNICATIONS AXIS ARTPFC and VAPIX are registered trademarks of Axis AB in various jurisdictions. All other trademarks are the property of their respective owners. We reserve the right to introduce modifications without notice.