


## AXIS TA1101-B Wiegand to OSDP Converter

Secure and efficient communication

AXIS TA1101-B Wiegand to OSDP Converter is a versatile accessory designed to bridge the gap between Wiegand readers and Axis door controllers, specifically the AXIS A1710-B and A1810-B Network Door Controllers which have only OSDP reader port on board. This compact device ensures seamless integration by converting Wiegand signals to OSDP, allowing modern, secure, and efficient communication between the reader and the door controller.

- > **Enabling connection of Wiegand reader to controller via OSDP**
- > **OSDP verified ensure interoperability**
- > **Compact design fit in a single gang box**
- > **Enclosure as an optional accessory for wall mount**

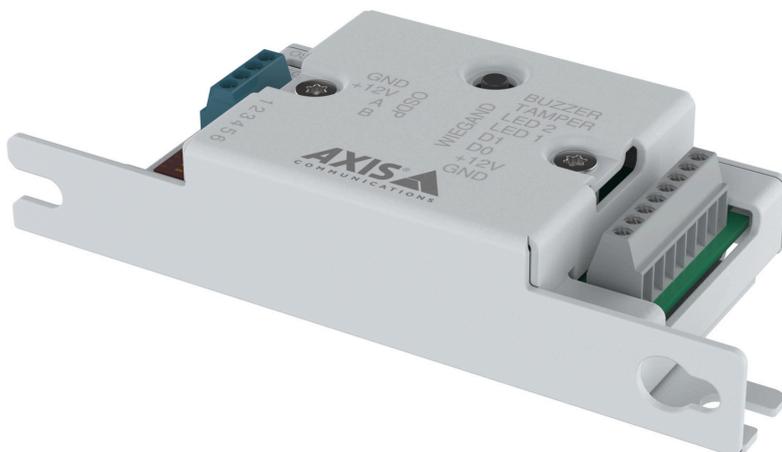

# AXIS TA1101-B Wiegand to OSDP Converter

## Power

### Input

12 V DC, typical 3 W, max 6.2 W

### Output

Power out reader: 12 V DC, 440 mA

## I/O interface

### Digital I/O

2x digital input for Wiegand D0, D1, 0–30 V DC

3x digital output for Wiegand LED1, LED2 and buzzer, open drain, 0–30 V DC, max 100 mA

1x input for Wiegand tamper, 0–30 V DC, possible to supervise (4 states)

Supervised inputs<sup>1</sup>: End of line resistor, serial connection 1 K

### RS485

1x port, half duplex, OSDP

## Cable requirements

Wire size for connectors: AWG 26–16

**Reader data (RS485):** 1 twisted pair with shield, 120 ohm impedance, AWG 24–16, qualified for up to 1000 m (3281 ft)

**Reader data (Wiegand):** AWG 22–16, qualified for up to 150 m (500 ft)

**Reader powered by AXIS TA1101-B (Wiegand):** AWG 22–16, qualified for up to 150 m (500 ft)<sup>2</sup>

**I/Os as inputs:** AWG 24–16, qualified for up to 200 m (656 ft)

**External DC power:** AWG 22–16, qualified for up to 3 m (10 ft)

**DC power from controller to AXIS TA1101-B:** 1 twisted pair with shield, AWG 22–16, qualified for up to 150 m (500 ft)

**When powered by controller:** AWG 22–16, max 150 m (500 ft) between controller and Wiegand reader

## System integration

### Tamper detection

Case open detection when used with AXIS TA1201<sup>1</sup>

## Approvals

### Product markings

CE, FCC, ICES, KC, RCM, UL/cUL, VCCI, WEEE

### Supply chain

TAA compliant

### EMC

CISPR 32 Class B, EN 55035, EN 55032 Class B, EN 50130-4, EN 61000-6-1, EN 61000-6-2

**Japan:** VCCI Class B

**Korea:** KS C 9835, KS C 9832 Class B

**USA:** FCC Part 15 Subpart B Class B

### Environment

IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78

### Safety

CAN/CSA C22.2 No. 62368-1 ed. 3, IEC/EN/UL 62368-1 ed. 3, RCM AS/NZS 62368.1:2022, IEC/EN 62471 risk group exempt, UL 2043, UL 294

## Cybersecurity

### Edge security

**Software:** Signed device software

Secure keystore: secure element (CC EAL 6+, FIPS 140-3 Level 3),

Secure boot

### Documentation

AXIS OS Software Bill of Material (SBOM)

To download documents, go to [axis.com/support/cybersecurity/resources](https://axis.com/support/cybersecurity/resources)

To read more about Axis cybersecurity support, go to [axis.com/cybersecurity](https://axis.com/cybersecurity)

## General

### Casing

Steel

Color: white NCS S 1002-B

1. Not intended for UL 294

2. Depending on the reader's voltage and current input range.

## Mounting

Wall mount, cabinet mount<sup>3</sup>, single gang box mount, enclosure mount

---

## Connectors

I/O: 1x 4-pin terminal block for OSDP connection

I/O: 1x 8-pin terminal block for Wiegand connection

---

## Operating conditions

-40 °C to 70 °C (-40 °F to 158 °F)

UL 294: 0 °C to 70 °C (32 °F to 158 °F)

Humidity 10–85% RH (non-condensing)

---

## Storage conditions

-40 °C to 70 °C (-40 °F to 158 °F)

Humidity 5–95% RH (non-condensing)

---

## Dimensions

For the overall product dimensions, see the dimension drawing in this datasheet.

---

## Weight

74 g (0.16 lb)

---

## Box content

Wiegand to OSDP converter, installation guide, owner authentication key

---

## Optional accessories

AXIS TA1201 Wall Mount Enclosure<sup>4</sup>

For more accessories, go to [axis.com/products/axis-ta1101-b-wiegand-to-osdp-converter#accessories](https://axis.com/products/axis-ta1101-b-wiegand-to-osdp-converter#accessories)

---

## System tools

AXIS Site Designer, product selector, accessory selector

Available at [axis.com](https://axis.com)

---

## Warranty

5-year warranty, see [axis.com/warranty](https://axis.com/warranty)

---

## Part numbers

Available at [axis.com/products/axis-ta1101-b-wiegand-to-osdp-converter#part-numbers](https://axis.com/products/axis-ta1101-b-wiegand-to-osdp-converter#part-numbers)

## Sustainability

### Substance control

PVC free, BFR/CFR free in accordance with JEDEC/ECA Standard JS709

RoHS in accordance with EU RoHS Directive 2011/65/EU and 2015/863, and standard EN IEC 63000:2018

REACH in accordance with (EC) No 1907/2006. For SCIP UUID, see [echa.europa.eu](https://echa.europa.eu)

---

### Materials

Screened for conflict minerals in accordance with OECD guidelines

To read more about sustainability at Axis, go to [axis.com/about-axis/sustainability](https://axis.com/about-axis/sustainability)

---

### Environmental responsibility

[axis.com/environmental-responsibility](https://axis.com/environmental-responsibility)


Axis Communications is a signatory of the UN Global Compact, read more at [unglobalcompact.org](https://unglobalcompact.org)

---

3. Shall be mounted in UL listed UL 294 enclosure with tamper switch.

4. For UL 294-certified installations, see the installation guide.

# Dimension drawing

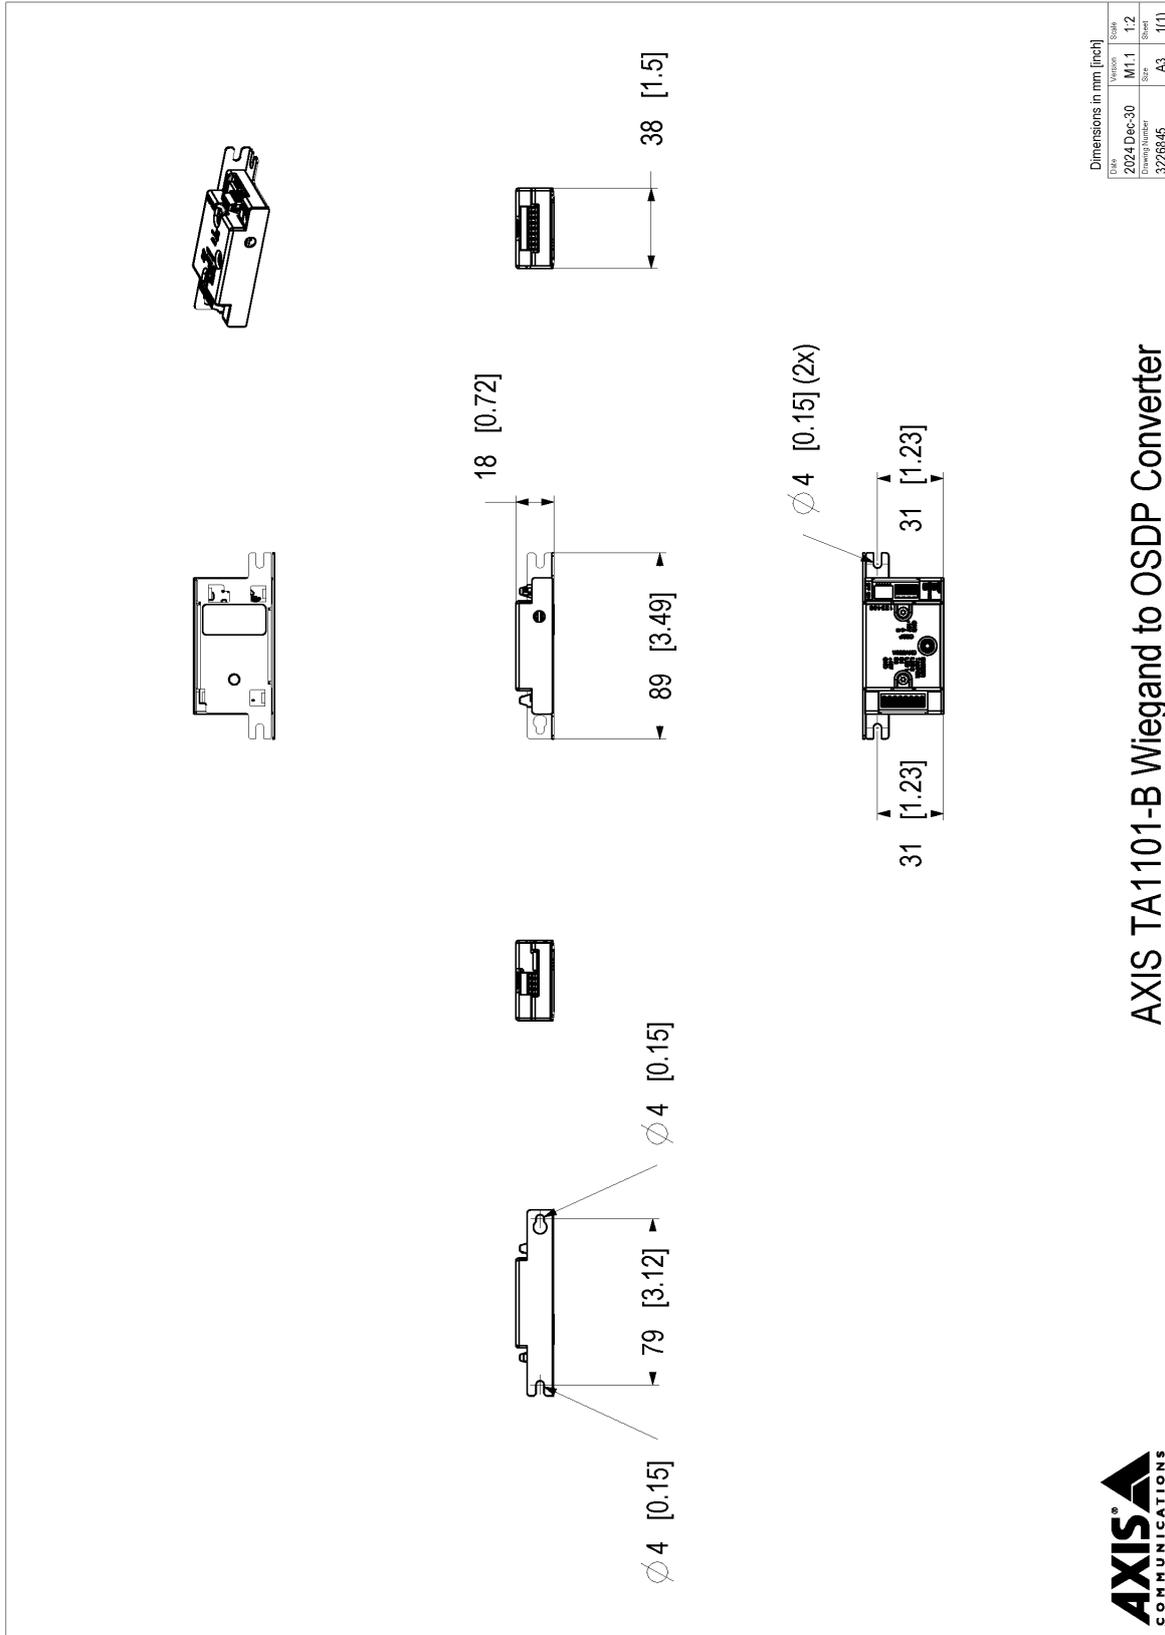

© 2024 Axis Communications AB. All rights reserved.

## AXIS TA1101-B Wiegand to OSDP Converter