

AXIS A1214 Network Door Controller Kit

All-in-one for up to four doors

This all-in-one, out-of-the-box-ready kit can control up to four doors. It includes four AXIS A1210-B units enclosed in AXIS TQ1808-VE Surveillance Cabinet, a robust, vandal-resistant IK10, IP66, and NEMA 4x-rated cabinet and all powered by PoE cable. Fully integrated within Axis end-to-end solutions, it's optimized for both small and large installations and supports flexible authentication using various credentials. This cost-effective kit offers fast and easy installation. With intelligence on the edge, it can internally handle all tasks related to door access—even if the network is down. Furthermore, thanks to built-in cybersecurity features, it prevents unauthorized access and safeguards your system.

- > **Complete control for four doors**
- > **Vandal-resistant enclosure**
- > **Intelligence on the edge**
- > **Built-in cybersecurity features**
- > **Fully integrated within Axis end-to-end solutions**



AXIS A1214 Network Door Controller Kit

Components

4x AXIS A1210-B Network Door Controller
1x AXIS TQ1808-VE Surveillance Cabinet
1x AXIS TA1601 Mounting Plate

Approvals

Product markings

UL/cUL, KC, VCCI

Supply chain

TAA compliant

EMC

EN 55035, EN 55032 Class B, EN 61000-3-2,
EN 61000-3-3
Korea: KC KN32 Class B, KC KN35

Safety

IEC/EN/UL 62368-1, IEC/EN 60950-1, UL 2043

General

Casing

IP66-, NEMA 4X- and IK10-rated
Polycarbonate
Stainless steel mounting plate
Color: white NCS S 1002-B and stainless steel

Mounting

Wall mount

Operating conditions

0 °C to 70 °C (32 °F to 158 °F)
Humidity 20–85% RH (non-condensing)

Storage conditions

-40 °C to 70 °C (-40 °F to 158 °F)

Dimensions

For the overall product dimensions, see the dimension drawing in this datasheet.

Weight

5.97 kg (13.2 lb)

Box content

Installation guide, connector kit (mounted), grounding kit, cable ties, pre-mounted cable gaskets, pre-mounted DIN rail, cable clamps, cable straps, power cover, device mounting bracket

System tools

AXIS Site Designer, AXIS Device Manager, product selector, accessory selector
Available at axis.com

Languages

English, German, French, Spanish, Italian, Russian, Simplified Chinese, Japanese, Korean, Portuguese, Polish, Traditional Chinese

Warranty

5-year warranty, see axis.com/warranty

Part numbers

Available at axis.com/products/axis-a1214#part-numbers

Sustainability

Substance control

PVC free, BFR/CFR free in accordance with JEDEC/ECA Standard JS709
RoHS in accordance with EU RoHS Directive 2011/65/EU/ and EN 63000:2018
REACH in accordance with (EC) No 1907/2006. For SCIP UUID, see echa.europa.eu

Materials

Screened for conflict minerals in accordance with OECD guidelines
To read more about sustainability at Axis, go to axis.com/about-axis/sustainability

Environmental responsibility

axis.com/environmental-responsibility
Axis Communications is a signatory of the UN Global Compact, read more at unglobalcompact.org

AXIS A1210-B Network Door Controller

Door controller

Readers

Up to 2 OSDP readers (multi-drop) or 1 Wiegand reader per controller
Up to 16x AXIS A4612 Network Bluetooth® Reader
OSDP Secure Channel supported
OSDP Secure Profile verified

Doors

1 wired door
Support for integrating up to 16x ASSA ABLOY Aperio® using the AH30 Communication Hub

Credentials

Third-party access management software depending on server capacity
Up to 250 000 credentials stored locally

Event buffer

Qualified for up to 250 000 events stored locally

Power

Power in: 12 V DC, max 36 W, or
Power over Ethernet (PoE) IEEE 802.3at, Type 2 Class 4
Power out lock: 12/24 V, jumper configurable
Powered by PoE: max 900 mA at 12 V DC, max 450 mA at 24 V DC
Powered by DC: max 1600 mA at 12 V DC, max 800 mA at 24 V DC
Power out reader: 12 V DC, max 500 mA
Total power budget for peripheral devices (locks, readers etc.): 2100 mA at 12 V if powered by DC, 1400 mA at 12 V if powered by PoE Class 4

I/O interface

Reader

Power output: 12 V DC, max 500 mA
Data: OSDP, Wiegand
I/O: Three open drain outputs, max 30 V, 100 mA each
One supervised input

Door

Power output: 12/24 V DC, jumper configurable
I/O: REX and door position sensor supervised inputs
Output relay: 1x relay NO/NC, max 2 A at 30 V DC, resistive

Auxiliary

DC output: 12 V, 50 mA
I/O: Two ports, configurable inputs or outputs

External

External tamper supervised input
Alarm supervised input

Supervised input

Configurable input for reader interface, door REX input, door position sensor input, and AUX
Programmable end-of-line resistors, 1 K, 2.2 K, 4.7 K and 10 K, 1 %, ¼ watt standard
One unsupervised input dedicated for cabinet tamper

Cable requirements

Wire size for connectors: CSA: AWG 28–16, CUL/UL: AWG 30–14
DC power and relay: AWG 18–16
Ethernet and PoE: STP CAT 5e or higher
Reader data (RS485): 1 twisted pair with shield, 120 ohm impedance, qualified for up to 1000 m (3281 ft)
Reader data (Wiegand): Qualified for up to 150 m (500 ft)
Reader powered by controller (RS485): AWG 20–16, qualified for up to 200 m (656 ft)¹
Reader powered by controller (Wiegand): AWG 20–16, qualified for up to 150 m (500 ft)²
I/Os as inputs: Qualified for up to 200 m (656 ft)

System on chip (SoC)

Memory

512 MB RAM, 2 GB Flash

1. Depending on the reader's voltage and current input range. Evaluated with A4020-E and A4120-E.
2. Depending on the reader's voltage and current input range.

Network

Network protocols

IPv4, IPv6, HTTP, HTTPS³, TLS³, QoS Layer 3 DiffServ, SMTP, mDNS (Bonjour), UPnP[®], SNMP v1/v2c/v3 (MIB-II), DNS/DNSv6, DDNS, NTP, RTSP, RTCP, RTP, TCP, UDP, IGMPv1/v2/v3, DHCPv4/v6, SOCKS, SSH, MQTT v3.1.1, Syslog

System integration

Application Programming Interface

Open API for software integration, including VAPIX[®], metadata and AXIS Camera Application Platform (ACAP); specifications at axis.com/developer-community. ACAP includes Native SDK. One-click cloud connection

Video management systems

Compatible with AXIS Camera Station, video management software from Axis' Application Development Partners available at axis.com/vms

Tamper detection

Removal of unit cover/tamper front
Reader tamper
Tilting, vibration

Approvals

Product markings

UL/cUL, KC, VCCI

Supply chain

TAA compliant

EMC

EN 55035, EN 55032 Class B, EN 61000-3-2, EN 61000-3-3
Korea: KC KN32 Class B, KC KN35

Safety

IEC/EN/UL 62368-1, IEC/EN 60950-1, UL 2043, UL 294

Cybersecurity

Edge security

Software: Signed firmware, brute force delay protection, digest authentication, password protection
Hardware: Axis Edge Vault cybersecurity platform Secure element (CC EAL 6+), secure keystore, secure boot

Network security

IEEE 802.1X (EAP-TLS)³, IEEE 802.1AR, HTTPS/HSTS³, TLS v1.2/v1.3³, Network Time Security (NTS), X.509 Certificate PKI, IP address filtering

Documentation

AXIS OS Hardening Guide

Axis Vulnerability Management Policy

Axis Security Development Model

To download documents, go to axis.com/support/cybersecurity/resources

To read more about Axis cybersecurity support, go to axis.com/cybersecurity

General

Casing

Aluminum
Color: white NCS S 1002-B

Mounting

Cabinet mount⁴
DIN rail mount⁴
Stack mount⁴

Connectors

Network: Shielded RJ45 10BASE-T/100BASE-TX/
1000BASE-T PoE

I/O: Terminal blocks for DC power, inputs/outputs, RS485/Wiegand, relay. Detachable and color coded connectors for ease of installation.

Wire size for connectors: CSA: AWG 28–16, CUL/UL: AWG 30–14

Operating conditions

0 °C to 70 °C (32 °F to 158 °F)
Humidity 20–85% RH (non-condensing)

Storage conditions

-40 °C to 70 °C (-40 °F to 158 °F)

3. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (openssl.org), and cryptographic software written by Eric Young (ey@cryptsoft.com).

4. Shall be mounted in UL listed UL 294 enclosure with tamper switch.

Dimensions

For the overall product dimensions, see the dimension drawing in this datasheet.

Weight

425 g (0.9 lb)

Box content

door controller, installation guide, connector kit (mounted), grounding kit, cable ties

Optional accessories

AXIS A9910 I/O Relay Expansion Module

AXIS TA4711 Access Card

AXIS TA4712 Key Fob

AXIS TA1801 Top Cover

AXIS TA1901 DIN Rail Clip

AXIS TA1902 Access Control Connector Kit⁵

AXIS TQ1808-VE Surveillance Cabinet⁵

AXIS 30 W Midspan⁵

AXIS 30 W Midspan AC/DC⁵

AXIS T8006 PS12⁵

For more accessories, go to axis.com/products/axis-a1210-b

System tools

AXIS Site Designer, AXIS Device Manager, product selector, accessory selector

Available at axis.com

Languages

English, German, French, Spanish, Italian, Russian, Simplified Chinese, Japanese, Korean, Portuguese, Polish, Traditional Chinese

Warranty

5-year warranty, see axis.com/warranty

Part numbers

Available at axis.com/products/axis-a1210-b#part-numbers

Sustainability

Substance control

PVC free, BFR/CFR free in accordance with JEDEC/ECA Standard JS709

RoHS in accordance with EU RoHS Directive 2011/65/EU/ and EN 63000:2018

REACH in accordance with (EC) No 1907/2006. For SCIP UUID, see echa.europa.eu

Materials

Screened for conflict minerals in accordance with OECD guidelines

To read more about sustainability at Axis, go to axis.com/about-axis/sustainability


Environmental responsibility

axis.com/environmental-responsibility


Axis Communications is a signatory of the UN Global Compact, read more at unglobalcompact.org

5. For UL 294-certified installations, see the installation guide.

Dimension drawing

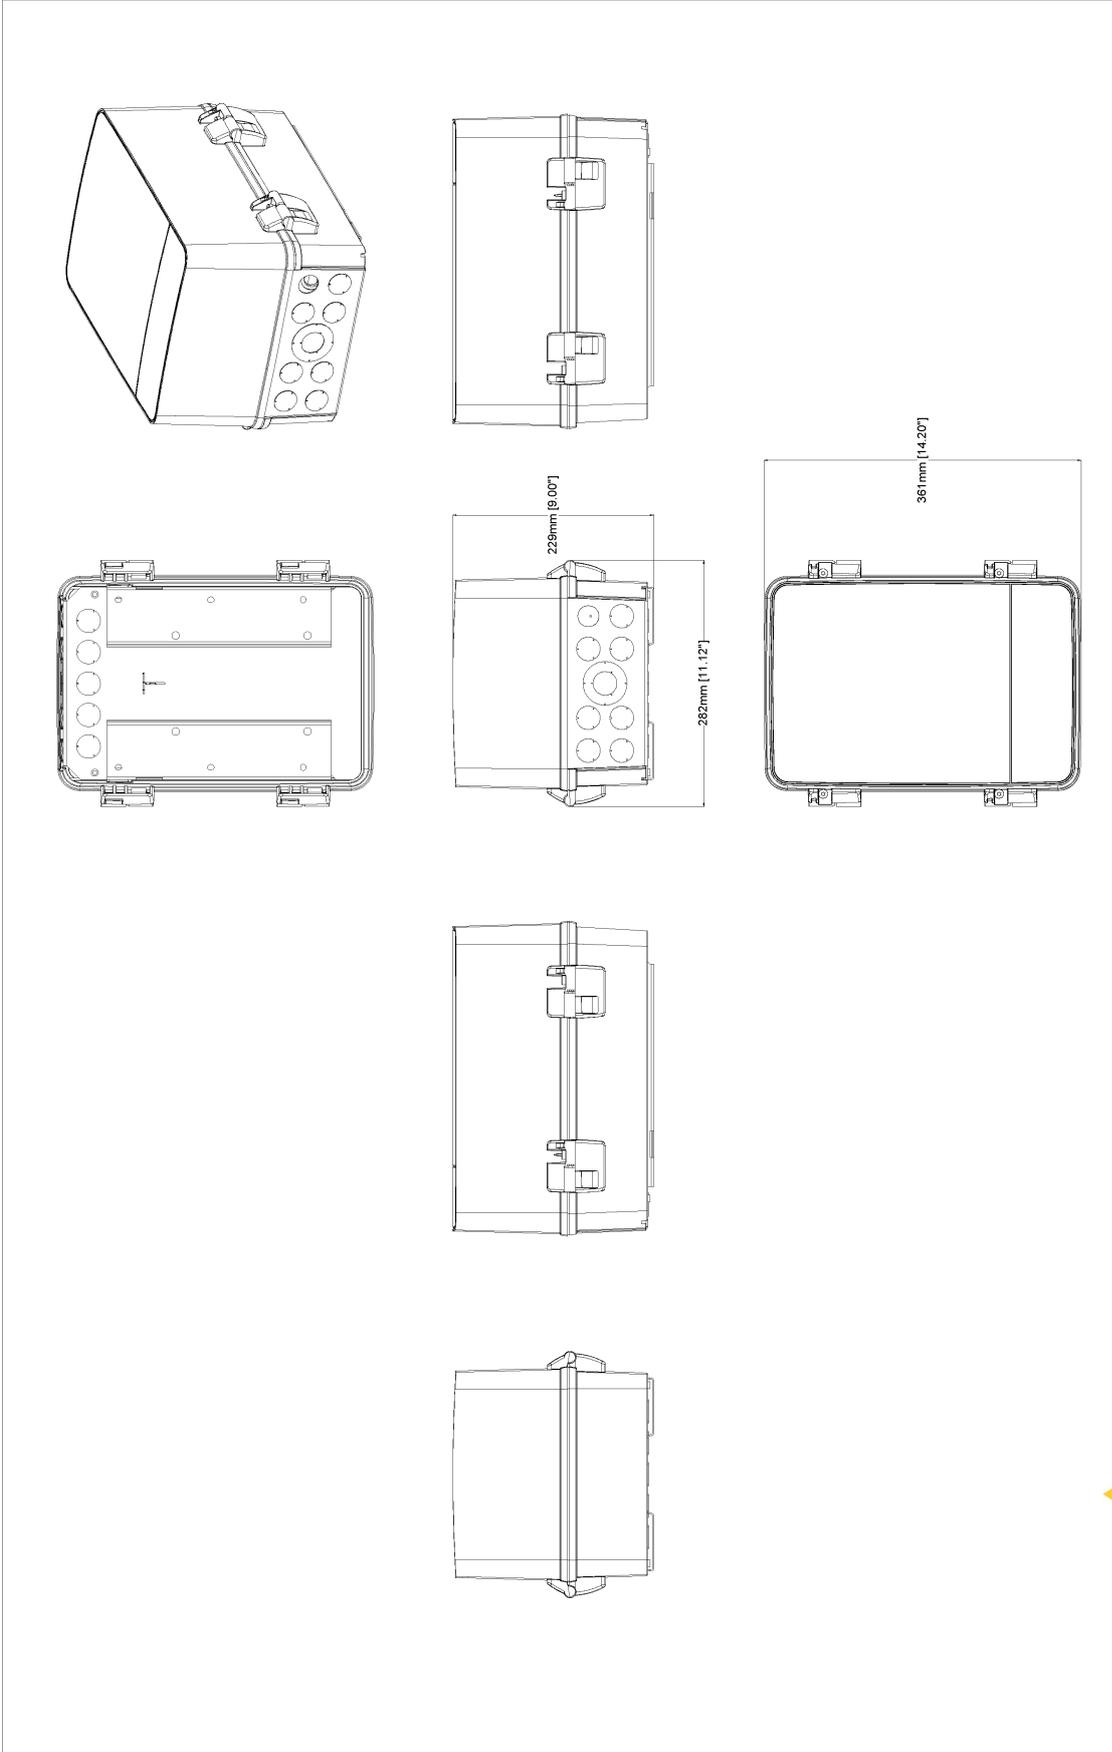

Revision	v.01	Revision date	2023-04-26
Paper size	A4	Release date	2023-04-26
Created by	MS	Scale	1:7

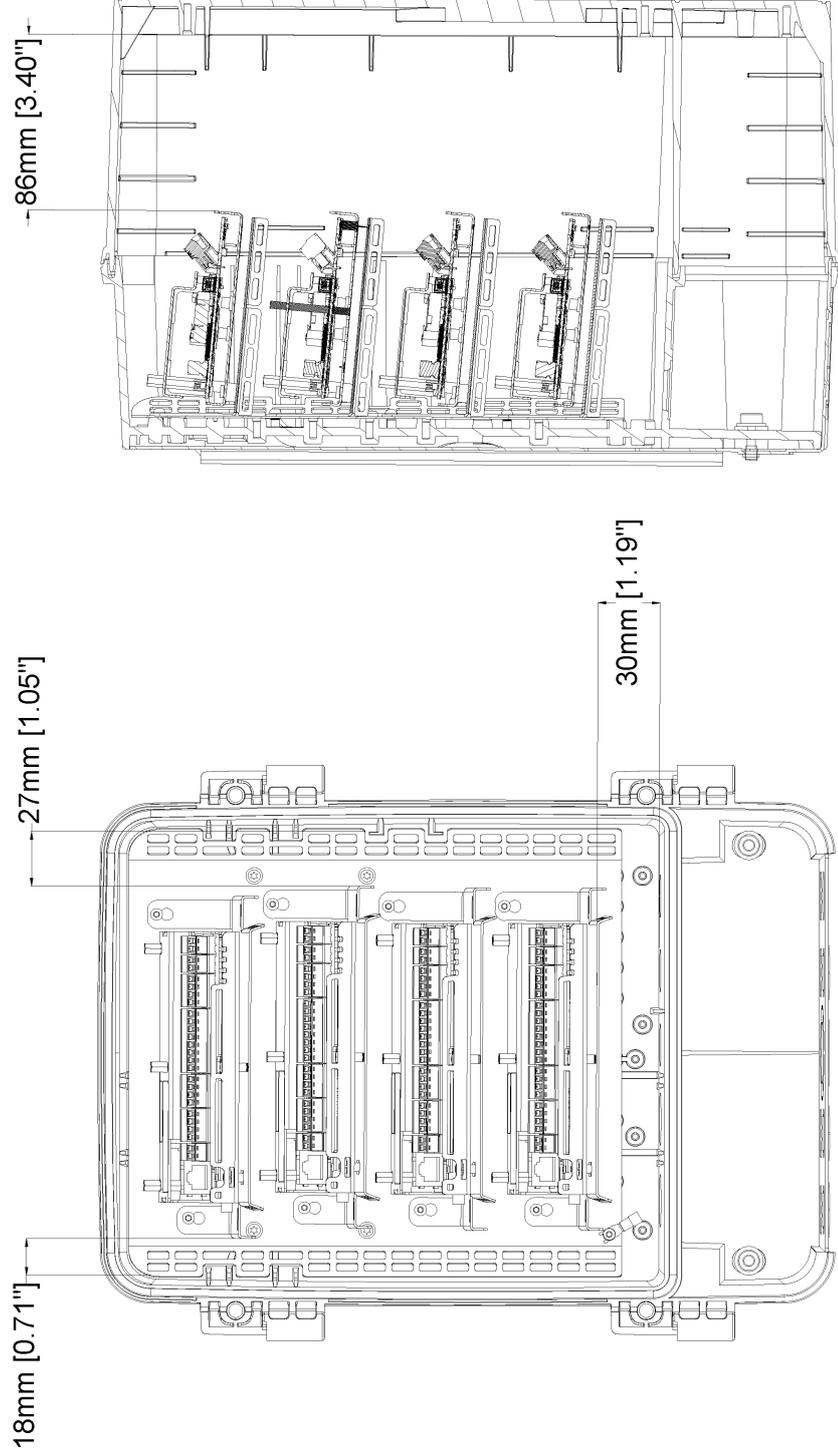

AXIS A1214 Network Door Controller Kit

www.axis.com

Revision	v.01	Revision date	2023-04-26
Paper size	A4	Release date	2023-04-26
Created by	MS	Scale	1:3

© 2023 Axis Communications

Highlighted capabilities

Axis Edge Vault

Axis Edge Vault is the hardware-based cybersecurity platform that safeguards the Axis device. It forms the foundation that all secure operations depend on and offer features to protect the device's identity, safeguard its integrity and protect sensitive information from unauthorized access. For instance, **secure boot** ensures that a device can boot only with **signed OS**, which prevents physical supply chain tampering. With signed OS, the device is also able to validate new device software before accepting to install it. And the **secure keystore** is the critical building-block for protecting cryptographic information used for secure communication (IEEE 802.1X, HTTPS, Axis device ID, access control keys etc.) against malicious extraction in the event of a security breach. The secure keystore and secure connections are provided through a Common Criteria or FIPS 140 certified hardware-based cryptographic computing module.

To read more about Axis Edge Vault, go to axis.com/solutions/edge-vault.

For more information, see axis.com/glossary