

AXIS C1511 Network Pendant Speaker

For installation in high ceilings – small

This all-in-one speaker system makes audio announcements smart and easy. For instance, it can be used to make general live or prerecorded voice messages, remotely and proactively warn off intruders, and deliver instructions. It offers easy integration with your video management software (VMS), VoIP telephony, analytics, and more. Including a preconfigured digital signal processor (DSP) it produces clear voice every time. It also features a built-in microphone enabling remote health testing. This visually attractive pendant speaker is ideal for mounting in high ceilings. Furthermore, the embedded audio management software supports user, content, zone, and scheduling management.

- > **All-in-one speaker system**
- > **Connects to standard network**
- > **Easy installation with just one network cable (PoE)**
- > **Scalable and easy to integrate**
- > **Remote health testing**



AXIS C1511 Network Pendant Speaker

Audio hardware

Enclosure

One way enclosure with 4 inches broadband dynamic cone speaker

Max sound pressure level

93 dB

Frequency response

70 Hz - 16 kHz

Coverage pattern

130° coaxial

Input/output

Built-in microphone (can be disabled)
External microphone, line in

Built-in microphone specification

50 Hz - 20 kHz

Amplifier description

Built-in 7 W Class D amplifier

Digital signal processing

Built-in and pre-configured

Audio management

AXIS Audio Manager Edge

Built in:

- Zone management allowing you to divide up to 200 speakers into 20 zones.
- Content management for music and live/pre-recorded announcements.
- Scheduling to decide when and where to play content.
- Content prioritization to ensure urgent messages interrupt the schedule.
- Health monitoring for remote discovery of system errors.
- User management to control who has access to what features.

For more details, see the datasheet on axis.com/products/axis-audio-manager-edge/support

AXIS Audio Manager Pro

For larger and more advanced systems. Sold separately. For specifications, see the datasheet on axis.com/products/axis-audio-manager-pro/support

AXIS Audio Manager Center

AXIS Audio Manager Center is a cloud service for remote access and management of multi-site systems. For specifications, see the datasheet on axis.com/products/axis-audio-manager-center/support

Audio software

Streaming

One-way/two-way with optional half-duplex echo cancellation. Mono.

Encoding

AAC LC 8/16/32/48 kHz, G.711 PCM 8 kHz, G.726 ADPCM 8 kHz, Axis μ -law 16 kHz, WAV, Opus 8/16/48 kHz

MP3 in mono/stereo from 64 kbps to 320 kbps.

Constant and variable bit rate.

Sampling rate from 8 kHz up to 48 kHz.

System integration

Application Programming Interface

Open API for software integration, including VAPIX® and AXIS Camera Application Platform (ACAP). One-click cloud connection

Video management systems

Compatible with AXIS Camera Station Edge, AXIS Camera Station Pro, and video management software from Axis' partners available at axis.com/vms.

Mass notification

Singlewire InformaCast®, Intrado Revolution, Lynx, Alertus

Unified communication

Verified compatibility:

SIP clients: 2N, Yealink, Cisco, Linphone, Grandstream

PBX/SIP servers: Cisco Call Manager, Cisco BroadWorks, Avaya, Asterix, Grandstream

Cloud service providers: Webex, Zoom

SIP

Supported SIP features: Secondary SIP server, IPv6, SRTP, SIPS, SIP TLS, DTMF (RFC2976 and RFC2833), NAT (ICE, STUN, TURN)

RFC 3261: INVITE, CANCEL, BYE, REGISTER, OPTIONS, INFO
DTMF (RFC 4733/RFC 2833)

Event conditions

Audio: audio clip playing, speaker test result

Call: state, state change

Device status: IP address blocked/removed, new IP address, network lost, system ready, live stream active

Edge storage: recording ongoing, storage disruption, storage health issues detected

I/O: digital input, manual trigger, virtual input

MQTT: stateless

Scheduled and recurring: schedule

Event actions

Audio clips: play, stop,

I/O: toggle I/O once, toggle I/O while the rule is active

LEDs: flash status LED, flash status LED while the rule is active

Light and siren: run light profile, run light profile while the rule is active, stop activities

MQTT: publish

Notification: HTTP, HTTPS, TCP and email

Recordings: record audio, record audio while the rule is active

Security: erase configuration

SNMP traps: send, send while the rule is active

Built-in installation aids

Test tone verification and identification

Functional monitoring

Auto Speaker Test (verification via built-in microphone)

Approvals

EMC

EN 55024, EN 55035, EN 55032 Class B, EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4

Australia/New Zealand: CISPR 24, CISPR 35, CISPR 32 Class B, RCM AS/NZS CISPR 32 Class B

Canada: ICES-3(B)/NMB-3(B)

Japan: VCCI Class B

Korea: KC KN35, KC KN32 Class B

USA: FCC Part 15 Subpart B Class B

Safety

CAN/CSA C22.2 No. 62368-1, IEC/EN 62368-1, KC-Mark, UL 62368-1

Environment

IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6,

IEC 60068-2-14, EC 60068-2-27, IEC/EN 60529 IP4X

Cybersecurity

ETSI EN 303 645, BSI IT Security Label, FIPS-140

Network

Network protocols

IPv4/v6⁽¹⁾, HTTP, HTTPS⁽²⁾, SSL/TLS⁽²⁾, QoS Layer 3
DiffServ, FTP, SFTP, CIFS/SMB, SMTP, Bonjour, UPnP™, SNMP v1/v2c/v3 (MIB-II), DNS, DynDNS, NTP, PTP, RTSP, RTP, TCP, UDP, IGMPv1/v2/v3, RTCP, ICMP, DHCP, ARP, SOCKS, SSH, Secure syslog (RFC 3164/5424, UDP/TCP/TLS), NTCIP, SIP

Cybersecurity

Edge security

Software: Signed OS, brute force delay protection, digest authentication and OAuth 2.0 RFC6749 Client Credential Flow/OpenID Authorization Code Flow for centralized ADFS account management, password protection, Axis Cryptographic Module (FIPS 140-2 level 1), AES-XTS-Plain64 256bit SD card encryption

Hardware: Axis Edge Vault cybersecurity platform
Secure element (CC EAL 6+), Axis device ID, secure keystore, secure boot

Network security

IEEE 802.1X (EAP-TLS, PEAP-MSCHAPv2)⁽²⁾, IEEE 802.1AR, HTTPS/HSTS⁽²⁾, TLS v1.2/v1.3⁽²⁾, Network Time Security (NTS), X.509 Certificate PKI, host-based firewall

Documentation

AXIS OS Hardening Guide

Axis Vulnerability Management Policy

Axis Security Development Model

AXIS OS Software Bill of Material (SBOM)

To download documents, go to axis.com/support/cybersecurity/resources

To read more about Axis cybersecurity support, go to axis.com/cybersecurity

1. Audio synchronization with IPv4 only.

2. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (openssl.org), and cryptographic software written by Eric Young (eay@cryptsoft.com).

System on chip (SoC)

Model

NXP i.MX 6SoloX

Memory

512 MB RAM, 512 MB Flash

General

Casing

IP40

Baffle: plastic

Mesh: surface-treated steel plate

Mesh color: white NCS S 1002-B

Top cover: plastic

Repaintable. For repainting instructions and impact on warranty, contact your Axis partner.

Speaker mounting method: hook

Power

Power over Ethernet (PoE), IEEE 802.3af/802.3af, Type 1 Class 3 (max 12.95 W)

Connectors

RJ45 10BASE-T/100BASE-TX PoE

I/O: 4-pin 2.5 mm terminal block for 2x supervised configurable I/Os

LED indicators

Status LED, front-facing LED

Storage

Support for microSD/microSDHC/microSDXC card

Max. size 1 TB

For SD card recommendations see www.axis.com

Reliability

Designed for 24/7 operation.

Operating conditions

Temperature: -30 °C to 50 °C (-22 °F to 122 °F)

Humidity: 10–85% RH (condensing)

Storage conditions

Temperature: -40 °C to 65 °C (-40 °F to 149 °F)

Humidity: 5–95 % RH (non-condensing)

Dimensions

Height: 150 mm (5.9 in), Ø 220 mm (8.7 in)

Weight

2650 g (5.8 lbs)

Box content

Speaker, installation guide, Owner Authentication Key, mesh cover, top cover, connector guard

Optional accessories

AXIS TC1901 Wire Kit, AXIS Safety Wire 3M

For accessories, see axis.com

Languages

English, German, French, Spanish, Italian, Russian, Simplified Chinese, Japanese, Korean, Portuguese, Polish, Traditional Chinese, Dutch, Czech, Swedish, Finnish, Turkish, Thai, Vietnamese

Warranty

5-year warranty, see axis.com/warranty

Part numbers

Available at axis.com/products/axis-c1511-e#part-numbers

Tools

Design

AXIS Site Designer

Available at axis.com

Installation

AXIS Device Manager, product selector, accessory selector

Available at axis.com

Sustainability

Substance control

PVC free in accordance with JEDEC/ECA Standard JS709
RoHS in accordance with EU RoHS Directive 2011/65/EU/ and EN 63000:2018

REACH in accordance with (EC) No 1907/2006. For SCIP UUID, see axis.com/partner.

Materials

Renewable carbon-based plastic content: 28%
(recycled: 0%, bio-based: 28%, carbon capture based: 0%)



Screened for conflict minerals in accordance with OECD guidelines

To read more about sustainability at Axis, go to axis.com/about-axis/sustainability



Environmental responsibility

axis.com/environmental-responsibility




Axis Communications is a signatory of the UN Global Compact, read more at *unglobalcompact.org*



Ø222mm [Ø8.72"]



180mm [7.09"]

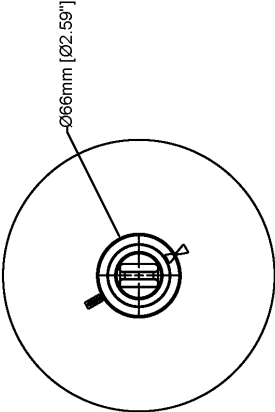

Ø66mm [Ø2.59"]



AXIS C1511 Network Pendant Speaker

Revision	v.01	Revision date	2021-09-06
Paper size	A4	Release date	2021-09-06
Created by	MF	Scale	1:5

© 2019 Axis Communications

www.axis.com