

AXIS Camera Station S1264 Rack Recording Server

Flexible and scalable recording server

Featuring powerful components, this secure, scalable recording server offers high performance and support for powerful applications and features. It includes AXIS Camera Station Pro licenses and multiple RAID configurations for flexible storage and multiple redundancy configuration. And, a Trusted Platform Module (FIPS 140-2 level 2 certified) ensures secure storage of all cryptographic keys and certificates. Available in three variants with a choice of storage, it comes preloaded with preconfigured software. Plus, all supported products are available in one price list for a one-stop-shop experience. Furthermore, it offers services such as Keep Your Hard Drive, Next Business Day Onsite Support, and a 5-year warranty.

- > **Scalable and powerful solution**
- > **Flexible storage options including RAID**
- > **Available in 3 variants: 24 TB, 64 TB, and 144 TB**
- > **64 AXIS Camera Station Pro licenses included**
- > **Extensive support and 5-year warranty**



AXIS Camera Station S1264 Rack Recording Server

Variants

S1264 Rack 24 TB
S1264 Rack 64 TB
S1264 Rack 144 TB

Licenses

64 AXIS Camera Station Pro Core Device NVR licenses and 10 AXIS Audio Manager Pro licenses included and tied to the hardware. Can be upgraded with additional licenses (sold separately).

System scalability

Qualified for 192 doors and a recording bitrate up to 850 Mbit/s, 96 video channels at 4 MP, 30 fps in a retail scenario. Check AXIS Site Designer for storage estimates.

Can be scaled with more devices when using AXIS S30 Recorder Series.

Qualified for 200 simultaneous audio streams using AXIS Audio Manager Pro.

Qualified for up to 1,000 doors with access control only.

Tested with:

20 live view clients

3 clients performing heavy playback or scrubbing operations

Hardware

Processor

Intel® Xeon® Silver

Memory

S1264 Rack 24 TB 2x 16 GB⁽¹⁾

S1264 Rack 64 TB 2x 16 GB⁽¹⁾

S1264 Rack 144 TB 2x 16 GB

Storage

S1264 Rack 24 TB

Hot swappable Enterprise Class SATA HDD

Total HDD slot: 12

Free HDD slot: 6

Out-of-the-box storage: 20 TB after RAID 5

Out-of-the-box capacity without RAID: 24 TB (6x4 TB)

S1264 Rack 64 TB

Hot swappable Enterprise Class SATA HDD

Total HDD slot: 12

Free HDD slot: 4

Out-of-the-box storage: 56 TB after RAID 5

Out-of-the-box capacity without RAID: 64 TB (8x8 TB)

S1264 Rack 144 TB

Hot swappable Enterprise Class SATA HDD

Total HDD slot: 12

Free HDD slot: 0

Out-of-the-box storage: 120 TB after RAID 6

Out-of-the-box capacity without RAID: 144 TB (12x12 TB)

RAID

S1264 Rack 24 TB

Factory RAID level: 5

Supported RAID levels: 0, 1, 5, 6, 10

S1264 Rack 64 TB

Factory RAID level: 5

Supported RAID levels: 0, 1, 5, 6, 10

S1264 Rack 144 TB

Factory RAID level: 6

Supported RAID levels: 0, 1, 5, 6, 10

Power

2 x 800 W hot-plug redundant power supplies (included)

(100–240 V AC, 9.2–4.7 A, 50/60 Hz)

Power consumption

Typical: 260 W (888 BTU/h)

Maximum: 280 W (956 BTU/h)

Connectors

Front side:

1x USB 2.0

1x VGA

1x iDRAC direct port

Rear side:

1x USB 2.0

1x USB 3.0

1x VGA

1x iDRAC dedicated Ethernet port

2x RJ45 1 Gbps

1. Units produced prior to September 1, 2024: 2x 8 GB

Video

Video streaming

Not intended for local viewing of video.
Recommended to use Axis workstations.

Approvals

Supply chain

TAA compliant

EMC

EN 55032 Class A, EN 55024, EN 55035, EN 61000-3-2, EN 61000-3-3, FCC Part 2 and 15 Class A, ISSED ICES-003 Class A, RCM AS/NZS CISPR 32 Class A, KS C 9832 Class A, KS C 9835, VCCI 32-1 Class A, BSMI

Safety

IEC/EN/UL 60950-1, IEC/EN/UL 62368-1, EN 62311, NOM-019-SCFI-1998, IS 13252

Cybersecurity

Edge security

Support for encrypted operating system drive and recording drive
FIPS 140-2 level 2 certified Trusted Platform Module (TPM 2.0)
SBOM
Secure Boot
Secure Component Verification (SCV)⁽²⁾

General

Operating system

Microsoft® Windows® 11 IoT Enterprise LTSC 2024⁽³⁾
Built-in operating system recovery: yes
Operating system drive: 480 GB SSD⁽⁴⁾

Remote server management

iDRAC 9 express license

Operating conditions

10 °C to 35 °C (50 °F to 95 °F)
Humidity 20–80% RH (non-condensing)

Storage conditions

–40 °C to 65 °C (–40 °F to 149 °F)

Dimensions

Height: 86.8 mm (3.42 in), 2U chassis
Width: 482 mm (18.98 in)
Depth without bezel: 707.78 mm (27.87 in)
Depth with bezel: 721.62 mm (28.41 in)
Product installation depth⁽⁵⁾: 685.78 mm (27.00 in)
Rack rails:
Type: sliding, square hole
Minimum rail depth⁽⁶⁾: 714 mm (28.11 in)
Rail adjustability range⁽⁷⁾: 631–868 mm (24.84 – 34.17 in)
For more information, see the Dell EMC Enterprise Systems Rail Sizing and Rack Compatibility Matrix

Weight

S1264 Rack 24 TB21.9 kg (48.28 lb)⁽⁸⁾
S1264 Rack 64 TB22.9 kg (50.49 lb)
S1264 Rack 144 TB27.1 kg (59.75 lb)⁽⁹⁾

Included accessories

Dell Ready Rails 2U Sliding Rails, 2x C13 to C14 power cords for rack PDU (Wall plug power cords are not included)

Optional accessories

Axis workstations
Enterprise hard drives
For more accessories, see axis.com

Services

Next Business Day Onsite Support
Keep Your Hard Drive

Warranty

5-year warranty, see axis.com/warranty

Export control

This product is subject to export control regulations, and you should always comply with all applicable national and international export or re-export control regulations.

Part numbers

axis.com/products/axis-s1264-rack#part-numbers

2. Only valid for units produced from September 1, 2024

3. Units produced prior to June 2025 (S1264 24 TB) / May 2025 (S1264 64 TB) / October 2025 (S1264 144 TB): Microsoft® Windows® 10 IoT Enterprise LTSC 2021

4. Units produced prior to September 1, 2024: 240 GB SSD

5. Measured from the outside-facing surface of the front rack post to the back of the product.

6. Measured from the outside-facing surface of the front rack post until the end of the rail.

7. The allowable distance between the outside-facing surface of the front and rear rack posts.

8. Units produced prior to September 1, 2024: 20.8 kg (45.86 lb)

9. Units produced prior to September 1, 2024: 25.6 kg (56.44 lb)

Sustainability

Substance control

RoHS in accordance with EU RoHS Directive 2011/65/EU, as amended by 2015/863/EU.
REACH in accordance with (EC) No 1907/2006. For SCIP UUID, see echa.europa.eu.

Materials

Recycled plastics material content: 25.35% (Post Consumer recycled)⁽¹⁰⁾
To read more about sustainability at Axis, go to axis.com/about-axis/sustainability




Environmental responsibility

axis.com/environmental-responsibility
Axis Communications is a signatory of the UN Global Compact, read more at unglobalcompact.org

10. Measured as a percentage of total amount of plastic (by weight) in the product as per guidance in EPEAT standard as applies to plastics parts

AXIS Camera Station Pro

For details about AXIS Camera Station Pro features and functions, see the AXIS Camera Station Pro datasheet on *axis.com*

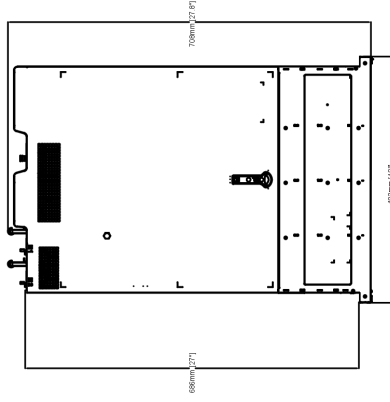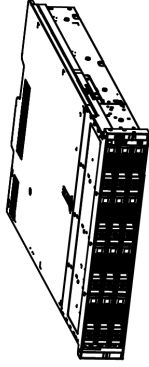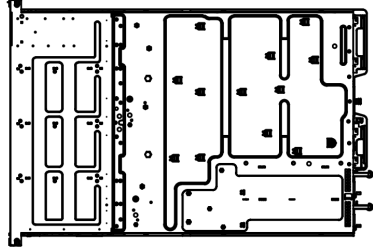

AXIS[®] COMMUNICATIONS

AXIS S1264 Rack

www.axis.com

Revision	v.01	Revision date	2026-03-31
Paper size	A4	Release date	2022-12-15
Created by	MF	Scale	1:12

© 2026 Axis Communications

Highlighted capabilities

SBOM (Software Bill of Materials)

SBOM is a detailed list of all software components included in an Axis product, including third-party libraries and license information. This list provides customers with insight into the product's software composition, facilitating the management of software security and meeting transparency requirements.

TPM (Trusted Platform Module)

TPM is a security chip integrated into Axis devices to provide a secure environment for storing and processing sensitive data. As a component providing a set of cryptographic features, the TPM protects information from unauthorized access. Specifically, it securely stores the private key, which never leaves the TPM, and processes all related cryptographic operations within the module itself. This ensures the secret part of the certificate remains safe even in the event of a security breach. By enabling features like encryption, authentication, and platform integrity, the TPM contributes to safeguarding the device against unauthorized access and tampering.

Secure Boot

Secure Boot is a security system that ensures only approved software (operating system and embedded switch firmware when applicable) runs on an Axis device at startup. It uses a boot process consisting of an unbroken chain of cryptographically validated software, starting in immutable memory (boot ROM), to verify the authenticity of the software. By establishing the trust chain, Secure Boot guarantees that the device only executes software with a valid digital signature, preventing malicious code from running on the device and ensuring the device boots only with a signed software.

For more information, see axis.com/glossary