

## AXIS S2216 Mk II Rack Appliance

All-in-one recording solution with integrated PoE switch

Ideal for larger installations, this all-in-one rack appliance includes 16 AXIS Camera Station Pro licenses, an integrated PoE switch, and 8 TB storage. It supports AI applications such as Smart Search 2. And you can easily expand your system using AXIS S30 Recorder Series. This recorder is preloaded with software and tools to help you set up and maintain your system. For instance, AXIS Recorder Toolbox and its intuitive installation wizard. Furthermore, it offers high-security features and standards such as FIPS 140-2 Level 2 certified TPM.

- > [All-in-one solution with integrated PoE switch](#)
- > [16 AXIS Camera Station Pro licenses included](#)
- > [Flexible storage options including RAID](#)
- > [Advance Replacement Service and 5-year hardware warranty](#)
- > [High cybersecurity features and standards](#)



# AXIS S2216 Mk II Rack Appliance

## Licenses

16 AXIS Camera Station Pro Core Device NVR licenses and 10 AXIS Audio Manager Pro licenses included and tied to the hardware. Can be upgraded with additional licenses (sold separately).

## System scalability

Qualified for up to 16 video channels and 32 doors simultaneously with a total recording rate up to 256 Mbps.  
Can be scaled with more devices when using AXIS S30 Recorder Series.  
Qualified for 200 simultaneous audio streams using AXIS Audio Manager Pro.  
Qualified for up to 1,000 doors with access control only.

## Hardware

### Processor

Intel® Core™ i3

### Memory

16 GB DDR5 (2x 8 GB)

### Storage

Surveillance Class HDD  
Total HDD slot: 4  
Free HDD slot: 2  
Out-of-the-box storage: 8 TB (2x4 TB)

### RAID

Factory RAID level: Not configured  
Supported RAID levels: 0, 1, 10

### Switch

16 ports integrated, 260 W total power budget  
Power over Ethernet (PoE) IEEE 802.3at Class 4

### Graphics card

Intel® UHD Graphics

### Power

Max 520 W, 260 W PoE dedicated  
100 - 240 V AC, 6.5-2.5 A, 50/60 Hz

### Power consumption

(Excluding power consumption from connected devices)  
Typical power consumption: 110 W  
Maximum power consumption: 130 W

## Connectors

### Front side:

2x USB 3.2  
1x Universal audio jack

### Rear side Switch:

16x PoE RJ45 1 Gbps  
1x SFP 1 Gbps  
1x RJ45 1 Gbps

### Rear side Server:

1x RJ45 1 Gbps  
2x USB 2.0  
2x HDMI 2.1

## Video

### Video streaming

#### Live view in Windows client:

1 stream x 4K at 30 fps  
4 split x 1080p at 30 fps\*  
9 split x 720p at 30 fps\*  
16 split x 360p at 15 fps  
25 split x 360p at 15 fps  
36 split x 360p at 15 fps  
Any combination of the above for up to two 4K monitors, except for configurations marked with \*, where only one monitor can display streams at 30 fps.  
Supports one 8K monitor:

1 stream x 8K at 20 fps  
Currently only supports 1 stream without split views.

#### Live view in web client (local or remote):

1 stream x 8K at 30 fps  
1 stream x 4K at 30 fps  
4 split x 1080p at 30 fps  
9 split x 720p at 30 fps\*  
Any combination of the above on one 8K and one 4K monitor, except for the configuration marked with \*, where only one monitor can display streams at 30 fps.  
Larger splits will affect server CPU performance.  
Maximum of 18 streams across all web clients, depending on stream profile.

#### Playback in Windows client:

Supports the same split scenarios as live view  
Recommended one monitor only due to disk load when playing back multiple streams with high video profiles.

Playback at high speeds can affect video performance.

**Playback in web client: (local or remote):**

1 stream up to 8K at 30 fps

## Approvals

### Product markings

UL/cUL, BIS, CE, KC, VCCI, RCM, BSMI, FCC, NOM

### Supply chain

TAA compliant

### EMC

EN 55035, EN 55032 Class A

EN 61000-3-2, EN 61000-3-3

Australia/New Zealand: RCM AS/NZS CISPR 32 Class A

Canada: ICES(A)/NMB(A)

Japan: VCCI Class A

Korea: KS C 9835, KS C 9832 Class A

USA: FCC Part 15 Subpart B Class A

Taiwan: CNS 15936

### Safety

CAN/CSA C22.2 No. 62368-1 ed. 3,

IEC/EN/UL 62368-1 ed. 3, RCM AS/NZS 62368. 1:2018,

IS 13252

## Cybersecurity

### Security

FIPS 140-2 level 2 certified Trusted Platform Module (TPM 2.0) supporting encrypted operating system drive and recording drive.

Secure boot, signed switch firmware

## General

### Operating system

Microsoft® Windows® 11 IoT Enterprise LTSC 2024

Operating system recovery: yes

Operating system drive: 256 GB SSD

### Operating conditions

0 °C to 40 °C (32 °F to 104 °F)

Humidity: 10–90% RH (non-condensing)

### Storage conditions

-40 °C to 65 °C (-40 °F to 149 °F)

Humidity: 10–90% RH (non-condensing)

### Dimensions

476 x 440 x 45 mm (18.7 x 17.3 x 1.8 in), 1U chassis

### Weight

11 kg (24.3 lb)

### Included accessories

Rack rails, power cord

### Optional accessories

Surveillance Hard Drive 6 TB available from Axis

Surveillance Hard Drive 4 TB available from Axis

Axis desktop terminals

Axis Ethernet surge protector

For more accessories, see [axis.com](https://axis.com)

### Warranty






**Recorder and hard drive:** 5-year warranty, see [axis.com/warranty](https://axis.com/warranty)

### Export control

This product is subject to export control regulations, and you should always comply with all applicable national and international export or re-export control regulations.

## **AXIS Camera Station Pro**

For details about AXIS Camera Station Pro features and functions, see the AXIS Camera Station Pro datasheet on [axis.com](http://axis.com)

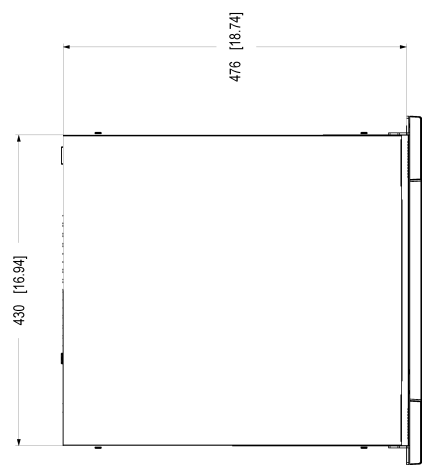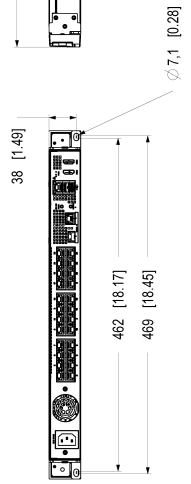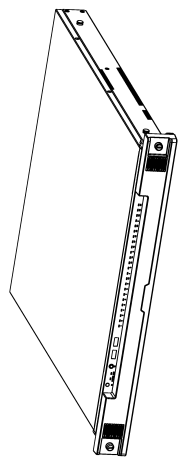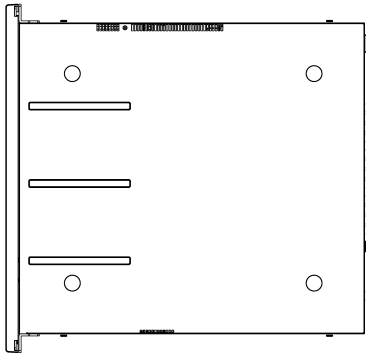

## Highlighted capabilities

### Secure Boot

Secure Boot is a security system that ensures only approved software (operating system and embedded switch firmware when applicable) runs on an Axis device at startup. It uses a boot process consisting of an unbroken chain of cryptographically validated software, starting in immutable memory (boot ROM), to verify the authenticity of the software. By establishing the trust chain, Secure Boot guarantees that the device only executes software with a valid digital signature, preventing malicious code from running on the device and ensuring the device boots only with a signed software.

### Signed firmware

The embedded switch firmware is signed with digital certificates using a secret, private key to guarantee its authenticity and integrity. This involves attaching a digital signature to the device firmware image, which is then verified by the device before acceptance and installation. The verification process checks for any compromise in the software's integrity, rejecting it if tampered with. Based on the industry-accepted Ed25519 elliptic-curve signature scheme, the verification process uses the digital certificate to confirm that the firmware remains unaltered and authentic, ensuring that any manipulation or tampering during transmission is detected before installation.

### SBOM (Software Bill of Materials)

SBOM is a detailed list of all software components included in an Axis product, including third-party libraries and license information. This list provides customers with insight into the product's software composition, facilitating the management of software security and meeting transparency requirements.

### TPM (Trusted Platform Module)

TPM is a security chip integrated into Axis devices to provide a secure environment for storing and processing sensitive data. As a component providing a set of cryptographic features, the TPM protects information from unauthorized access. Specifically, it securely stores the private key, which never leaves the TPM, and processes all related cryptographic operations within the module itself. This ensures the secret part of the certificate remains safe even in the event of a security breach. By enabling features like encryption, authentication, and platform integrity, the TPM contributes to safeguarding the device against unauthorized access and tampering.

For more information, see [axis.com/glossary](https://www.axis.com/glossary)