


## AXIS T91D67 Pole Mount

For fixed dome cameras

AXIS T91D67 Pole Mount is suitable for all Axis fixed dome cameras compatible with 1.5" NPS threaded Axis pendant kits. Thanks to its impact-resistant and outdoor-proven material, the mount can be used in both indoor and outdoor environments. AXIS T91D67 is intended for poles between 60–400 mm (2.4–15.7 in) in diameter, and also for beams. It features a closed back and a cable gasket for protection against insect infestation.

- > **Robust and safe pole installation**
- > **Suitable for indoor and outdoor use**
- > **Impact-resistant to prevent vandalism**
- > **Cable gasket to prevent insect infestation**
- > **Support for 1.5" NPS threaded Axis pendant kits**

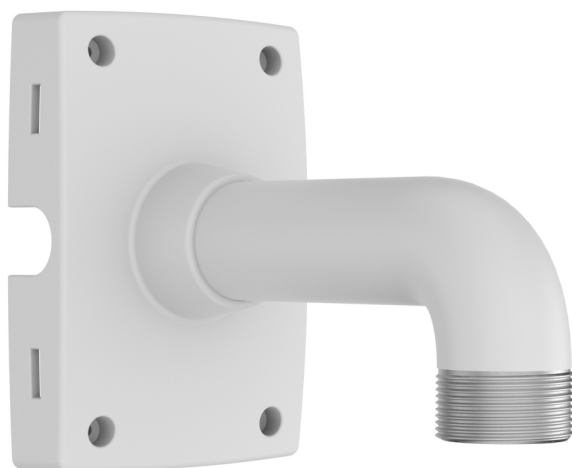

## AXIS T91D67 Pole Mount

General		Environment
<b>Supported products</b>	Axis fixed dome cameras compatible with 1.5" NPS threaded Axis pendant kits	IEC 60721, IEC 60721-4 Class 4M3, MIL-STD 810G 509.5, NEMA 250 Type 4X, RoHS, WEEE
<b>Casing</b>	Material: powder-coated aluminum casing Color: white NCS S 1002-B Interface: 1.5" NPS	<b>Impact</b> IEC 62262 IK10
<b>Sustainability</b>	PVC free	<b>Included accessories</b>
<b>Dimensions</b>	252 x 134 x 194 mm (9.9 x 5.3 x 7.6 in)	Installation Guide Stainless steel straps 1450 mm (57 in), 1 pair Insect-proof cable gasket
<b>Weight</b>	1.2 kg (2.6 lb)	<b>Required accessories</b>
<b>Maximum load</b>	15 kg (33 lb)	1.5" NPS threaded Axis pendant kit
<b>Cable routing</b>	Back: cable hole Sides: 3/4" Conduit entrance	<b>Optional accessories</b>
<b>Environment</b>	Indoor Outdoor	Stainless steel straps 700 mm (28 in), 1 pair
<b>Approvals</b>	Safety IEC/EN/UL 60950-1, IEC/EN/UL 60950-22	<b>Warranty</b>
		Axis 3-year warranty, see <a href="http://www.axis.com/warranty">www.axis.com/warranty</a>

Environmental responsibility:

[axis.com/environmental-responsibility](http://axis.com/environmental-responsibility)