


## AXIS D2122-VE Radar

Multi-layered solution with innovative 180° coverage, 24/7

Built on ARTPEC-9, this innovative radar delivers a 180° horizontal field of detection and offers accurate AI-powered classification across large areas, 24/7. It works standalone or integrated with selected ARTPEC-9 PTZ cameras to enable next-level radar-video fusion between the two devices. This multi-layered approach ensures maximum efficiency with more enriched data and better decision-making tools. AXIS D2122-VE uses the same mounting interface as Axis PTZ cameras for easy installation. It offers low power consumption, and with support for PoE out, there's no additional cable drop needed. What's more, it can trigger automated actions on other devices, such as activating a strobe siren.

- > **Human recognition zone of 20,000 m<sup>2</sup> (215,000 sq ft)**
- > **Box-shaped recognition zones for efficient coverage**
- > **Deep integration with selected PTZ cameras**
- > **Possibility for radar-video fusion technology**
- > **Designed for easy connectivity**

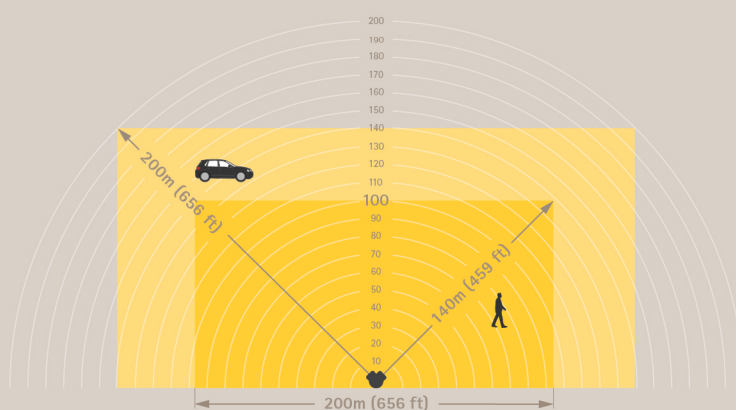

## AXIS D2122-VE Radar

### Variants

AXIS D2122-VE Radar Black  
AXIS D2122-VE Radar White

### Radar

#### Profiles

Area monitoring

#### Sensor

FMCW (Frequency Modulated Continuous Wave)

#### Object data

Object type (classes: humans, vehicles, unknown),  
range, direction, velocity

#### Frequency

24.05–24.25 GHz

#### RF transmit power

<100 mW (EIRP)  
License-free. Unharmful radio-waves.

#### Recommended mounting height

4–10 m (13–33 ft)<sup>(1)</sup>

#### Recognition zone

Area monitoring profile: up to 140 m (450 ft) when  
detecting a person.<sup>(2)</sup> For an illustration, see the front  
page.

#### Detection range

Area monitoring profile: up to 200 m (650 ft) when  
detecting a vehicle.<sup>(2)</sup> For an illustration, see the front  
page.

#### Radial speed

Area monitoring profile: up to 80 km/h (50 mph)

#### Field of detection

Horizontal: 180°

#### Speed accuracy

+/- 2 km/h (1.25 mph)

#### Distance accuracy

Area monitoring profile: 0.9 m (3 ft)

#### Angle accuracy

<0.5°

#### Spatial differentiation

3 m<sup>(3)</sup>

#### Data refresh rate

6.67 Hz

#### Coverage

Area monitoring profile: 20000 m<sup>2</sup> (215000 sq ft) for  
persons  
39000 m<sup>2</sup> (421000 sq ft) for vehicles

#### Coexistence zone

Frequency band: 24 GHz  
Radius: 500 m (1640 ft)  
Recommended number of radars: up to 12

#### Radar controls

Multiple detection zones, line crossing detection with  
one or two lines, exclusion zones with filters for short-  
lived objects, object speed, object type, configurable  
trigger duration  
Radar transmission on/off, radar image stabilization,  
grid opacity, zone opacity, color scheme, trail lifetime,  
detection sensitivity, swaying object filter, unknown  
object filter, reference map calibration with options to  
scale, pan, and zoom map

### System on chip (SoC)

#### Model

ARTPEC-9

#### Memory

2 GB RAM, 8 GB Flash

#### Compute capabilities

Deep learning processing unit (DLPU)

1. The mounting height affects the detection range. See the user manual at [axis.com](https://axis.com) for more information.

2. Measured at 5 m mounting height. See the user manual at [axis.com](https://axis.com) for more information.

3. Minimum distance between moving objects.

## Video

### Video compression

H.264 (MPEG-4 Part 10/AVC) Baseline, Main and High Profiles  
H.265 (MPEG-H Part 2/HEVC) Main Profile  
AV1  
Motion JPEG

### Resolution

16:9: 1920x1080 to 320x200  
4:3: 1440x1080 to 160x120

### Frame rate

Up to 10 fps (50/60 Hz) in all resolutions

### Video streaming

Up to 20 unique and configurable video streams<sup>(4)</sup>  
Axis Zipstream technology in H.264 and H.265  
Controllable frame rate and bandwidth  
VBR/ABR/MBR H.264/H.265  
Low latency mode  
Video streaming indicator

## Network

### Network protocols

IPv4, IPv6 USGv6, ICMPv4/ICMPv6, HTTP, HTTPS<sup>(5)</sup>, HTTP/2, TLS<sup>(5)</sup>, QoS Layer 3 DiffServ, FTP, SFTP, CIFS/SMB, SMTP, mDNS (Bonjour), UPnP®, SNMP v1/v2c/v3 (MIB-II), DNS/DNSv6, DDNS, NTP, NTS, PTP, RTSP, RTP, SRTP/RTSPS, TCP, UDP, IGMPv1/v2/v3, RTCP, ICMP, DHCPv4/v6, ARP, SSH, LLDP, CDP, MQTT v3.1.1, Secure syslog (RFC 3164/5424, UDP/TCP/TLS), Link-Local address (ZeroConf)

## System integration

### Application Programming Interface

Open API for software integration, including VAPIX® and AXIS Camera Application Platform (ACAP); specifications at [axis.com/developer-community](https://axis.com/developer-community).  
One-click cloud connection  
ONVIF® Profile G, ONVIF® Profile M, ONVIF® Profile S, and ONVIF® Profile T, specifications at [onvif.org](https://onvif.org)

### Video management systems

Compatible with AXIS Camera Station Pro, and video management software from Axis' partners available at [axis.com/vms](https://axis.com/vms).

### Onscreen controls

Play media clip

### Edge-to-edge

Microphone pairing  
Speaker pairing  
Camera pairing  
Siren and light pairing

### Event conditions

Application  
Device status: above/below/within operating temperature, IP address blocked/removed, live stream active, network lost, new IP address, system ready  
Edge storage: recording ongoing, storage disruption, storage health issues detected  
I/O: manual trigger, virtual input is active  
MQTT: MQTT client connected  
Scheduled and recurring: schedule

### Event actions

Illumination: use lights, use lights while the rule is active  
LEDs: flash status LED, flash status LED while the rule is active  
MQTT: send MQTT publish message  
Notification: HTTP, HTTPS, TCP and email  
Overlay text  
Radar: dynamic LED strip, radar autotracking, radar detection  
Security: erase configuration  
SNMP trap messages: send, send while the rule is active  
Images or video clips: FTP, SFTP, HTTP, HTTPS, network share and email

### Data streaming

Radar metadata with relative position, GPS position<sup>(6)</sup>, velocity, direction, and object type

### Built-in installation aids

Reference map calibration, sensor for tilt angle, GPS position

4. We recommend a maximum of 3 unique video streams per camera or channel, for optimized user experience, network bandwidth, and storage utilization. A unique video stream can be served to many video clients in the network using multicast or unicast transport method via built-in stream reuse functionality.
5. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. ([openssl.org](https://openssl.org)), and cryptographic software written by Eric Young ([ey@cryptsoft.com](mailto:ey@cryptsoft.com)).
6. Enter the radar's GPS position manually to get the objects' GPS position in the data stream.

## Analytics

### Applications

#### Supported

AXIS Radar Autotracking for PTZ (Slew to Cue)

For supported cameras, see [axis.com/products/axis-radar-autotracking](https://axis.com/products/axis-radar-autotracking)

Support for AXIS Camera Application Platform enabling installation of third-party applications, see [axis.com/acap](https://axis.com/acap)

## Approvals

### Product markings

CE, CRA, CRC, ENACOM, FCC, ICASA, MIC Telecom, MOC, MTC, RATEL, RCM, RSM, SUBTEL, UL, URSE, VCCI, WPC

### Supply chain

TAA compliant

### EMC

EN 55035, EN 55032 Class B, EN 50121-4, EN 61000-6-1, EN 61000-6-2

USA: FCC Part 15 Subpart B Class B

Railway: IEC 62236-4

### Safety

CAN/CSA C22.2 No. 62368-1 ed. 3, IEC/EN 62368-1 ed. 3, EN 62311

### Environment

IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78, IEC/EN 60529 IP66/IP67, IEC/EN 62262 IK09/IK10, ISO 21207 (Method B), ISO 4892-2, ISO 12944-6 C5, NEMA 250 Type 4X, NEMA TS 2 (2.2.7-2.2.9)

### Wireless

EN 300440, EN 301489-1, EN 301489-3, FCC Part 15 Subpart C, RSS-210

### Network

NIST SP500-267

### Cybersecurity

EN 18031-1, ETSI EN 303 645, BSI IT Security Label, FIPS 140

## Cybersecurity

### Edge security

**Software:** Signed OS, brute force delay protection, digest authentication and OAuth 2.0 RFC6749 Client Credential Flow/OpenID Authorization Code Flow for centralized ADFS account management, password protection, Axis Cryptographic Module (FIPS 140-2 level 1)

**Hardware:** Axis Edge Vault cybersecurity platform  
Secure keystore: Secure element (CC EAL 6+, FIPS 140-3 Level 3), system-on-chip security (TEE)  
Axis device ID, signed video, secure boot, encrypted filesystem (AES-XTS-Plain64 256bit)

### Network security

IEEE 802.1X (EAP-TLS, PEAP-MSCHAPv2)<sup>(7)</sup>, IEEE 802.1AE (MACsec PSK/EAP-TLS), IEEE 802.1AR, HTTPS/HSTS<sup>(7)</sup>, TLS v1.2/v1.3<sup>(7)</sup>, Network Time Security (NTS), X.509 Certificate PKI, host-based firewall, WPA/WPA2-Enterprise (EAP-TLS, EAP-PEAP/MSCHAPv2)

### Documentation

*AXIS OS Hardening Guide*

*Axis Vulnerability Management Policy*

*Axis Security Development Model*

AXIS OS Software Bill of Material (SBOM)

To download documents, go to [axis.com/support/cybersecurity/resources](https://axis.com/support/cybersecurity/resources)

To read more about Axis cybersecurity support, go to [axis.com/cybersecurity](https://axis.com/cybersecurity)

## General

### Casing

IP66/IP67, NEMA 4X- and IK10-rated

Aluminum and plastic casing

Color: white NCS S 1002-B

For repainting instructions, go to the product's support page. For information about the impact on warranty, go to [axis.com/warranty-implication-when-repainting](https://axis.com/warranty-implication-when-repainting).

### Power

Power over Ethernet (PoE) IEEE 802.3bt Type 2 Class 4  
Typical 9 W, max 15 W

For PoE output IEEE 802.3bt, Type 3 Class 6, it is required to power the radar with IEEE 802.3bt, Type 4 Class 8, max 66 W.

For PoE output IEEE 802.3bt, Type 2 Class 4, it is required to power the radar with IEEE 802.3bt, Type 3 Class 6, max 40.5 W.

7. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. ([openssl.org](https://openssl.org)), and cryptographic software written by Eric Young ([ey@cryptsoft.com](mailto:ey@cryptsoft.com)).

## Connectors

Network: Shielded RJ45 10BASE-T/100BASE-TX/  
1000BASE-T PoE  
Network: Shielded RJ45 1000BASE-T PoE output to  
power an external PoE device

## Dynamic LED

Dynamic LED strip with RGB (red, green, blue) LEDs and  
predefined light patterns  
Daylight visibility up to 60 m (197 ft)<sup>(8)</sup>

## Storage

Support for microSD/microSDHC/microSDXC card  
Support for SD card encryption (AES-XTS-Plain64  
256bit)  
Recording to network-attached storage (NAS)  
For SD card and NAS recommendations see [axis.com](https://axis.com)

## Operating conditions

Temperature: -40 °C to 60 °C (40° F to 140 °F)  
Humidity: 10–100% RH (non-condensing)

## Storage conditions

Temperature: -40 °C to 65 °C (-40 °F to 149 °F)  
Humidity: 5–95% RH (non-condensing)

## Dimensions

For the overall product dimensions, see the dimension  
drawing in this datasheet.  
Effective Projected Area (EPA): 0.08 m<sup>2</sup> (0.86 ft<sup>2</sup>)

## Weight

4200 g (9.3 lb)

## Box content

Radar, installation guide, TORX® T20 screw driver,  
connector guard, cable gaskets, owner authentication  
key

## System tools

AXIS Site Designer, AXIS Device Manager, product  
selector, accessory selector  
Available at [axis.com](https://axis.com)

## Languages

English, German, French, Spanish, Italian, Russian,  
Simplified Chinese, Japanese, Korean, Portuguese,  
Polish, Traditional Chinese, Dutch, Czech, Swedish,  
Finnish, Turkish, Thai, Vietnamese

## Warranty

5-year warranty, see [axis.com/warranty](https://axis.com/warranty)

## Part numbers

Available at [axis.com/products/axis-d2122-ve-  
radar#part-numbers](https://axis.com/products/axis-d2122-ve-radar#part-numbers)

## Optional accessories

### Installation

AXIS T8415 Wireless Installation Tool

### Mounting

AXIS T91 Mounting Accessories, AXIS TQ5001–E Wall-  
and-Pole Mount, AXIS TQ5301–E Corner Mount

### Storage

AXIS Surveillance Cards

For more accessories, go to [axis.com/products/axis-  
d2122-ve-radar#compatible-products](https://axis.com/products/axis-d2122-ve-radar#compatible-products)

## Sustainability

### Substance control

PVC free, BFR/CFR free in accordance with JEDEC/ECA  
Standard JS709  
RoHS in accordance with EU RoHS Directive 2011/65/  
EU and 2015/863, and standard EN IEC 63000:2018  
REACH in accordance with (EC) No 1907/2006. For SCIP  
UUID, see [echa.europa.eu](https://echa.europa.eu)







### Materials

Renewable carbon-based plastic content: 69% (bio-  
based)  
Screened for conflict minerals in accordance with OECD  
guidelines  
To read more about sustainability at Axis, go to [axis.  
com/about-axis/sustainability](https://axis.com/about-axis/sustainability)

### Environmental responsibility

[axis.com/environmental-responsibility](https://axis.com/environmental-responsibility)  
Axis Communications is a signatory of the UN Global  
Compact, read more at [unglobalcompact.org](https://unglobalcompact.org)

8. In direct sunlight. The range increases in conditions with less light.

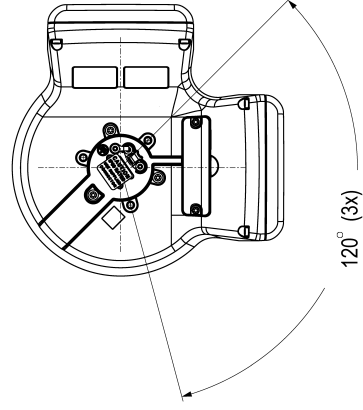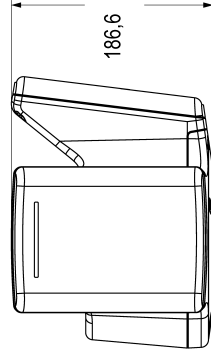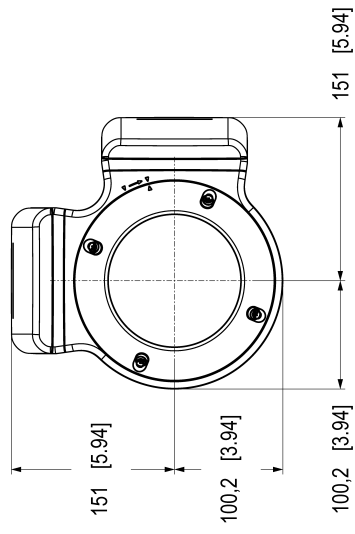

## Highlighted capabilities

### Box-shaped detection and recognition zones

Our innovative box-shaped surveillance zones enable efficient and optimal coverage planning, simplifying system design. These zones ensure precise and reliable detection and classification of objects within a defined area, enhancing surveillance capabilities.

By using unique box-shaped zones, the radar can accurately track and monitor objects in a predicted area, providing comprehensive situational awareness and the possibility for gap-free coverage. This approach optimizes coverage, ensuring effective and reliable surveillance.

### Radar-video fusion technology

Our advanced radar-video fusion technology integrates data from radar devices and video cameras to deliver superior surveillance and monitoring performance. Initially, the radar triggers a detection and classifies it using AI, ensuring reliable monitoring over extended ranges and in challenging environmental conditions 24/7, including darkness and adverse weather. Following this, a second layer of AI-powered video analytics validates the radar's trigger and classification, and starts tracking the object. After validation, the system decides, based on predefined scenarios, whether to send an alarm. This fusion of radar and video enhances overall accuracy, minimizes false alarms, and provides comprehensive situational awareness, ensuring reliable and effective monitoring by combining the strengths of both radar and video technologies.

### Edge-to-edge

Edge-to-edge technology is a way to make IP devices communicate directly with each other. It offers smart pairing functionality between, for example, Axis cameras and Axis audio or radar products.

### Dynamic LED strip

Dynamic LED strip is a feature in selected Axis radars. With RGB (red, green, blue) LEDs and predefined light patterns, it can be used to deter, warn or notify.

### Axis Edge Vault

Axis Edge Vault is the hardware-based cybersecurity platform that safeguards the Axis device. It forms the foundation that all secure operations depend on and offer features to protect the device's identity, safeguard its integrity and protect sensitive information from unauthorized access. For instance, **secure boot** ensures that a device can boot only with **signed OS**, which prevents physical supply chain tampering. With signed OS, the device is also able to validate new device software before accepting to install it. And the **secure keystore** is the critical building-block for protecting cryptographic information used for secure

communication (IEEE 802.1X, HTTPS, Axis device ID, access control keys etc.) against malicious extraction in the event of a security breach. The secure keystore and secure connections are provided through a Common Criteria or FIPS 140 certified hardware-based cryptographic computing module.

Furthermore, signed video ensures that video evidence can be verified as untampered. Each camera uses its unique video signing key, which is securely stored in the secure keystore, to add a signature into the video stream allowing video to be traced back to the Axis camera from where it originated.

To read more about Axis Edge Vault, go to [axis.com/solutions/edge-vault](https://axis.com/solutions/edge-vault).

For more information, see [axis.com/glossary](https://axis.com/glossary)