

AXIS TP3826-E Housing

IP6K9K-rated outdoor housing for onboard cameras

AXIS TP3826-E Housing enables selected Axis onboard cameras to be mounted on the outside of vehicles, such as buses, trams and emergency vehicles. The enclosure is PVC-free, and made of impact-resistant polymer and aluminum base plate. AXIS TP3826-E Housing complies with strict regulatory demands of the transportation industry.

- > [Housing for outdoor installations on vehicles](#)
- > [IP66/IP67, IP6K9K, NEMA 250 Type 4X and IK10](#)
- > [Operating temperature -30 °C to 55 °C \(-22 °F to 131 °F\)](#)




AXIS TP3826–E Housing

Supported products	AXIS M3905-R, AXIS P3904-R Mk II, AXIS P3905-R Mk II, AXIS P3905-R Mk III, AXIS P3925-R Dome Camera with 2.8 mm, 3.6 mm, 6 mm and 8 mm lenses	Operating conditions	With AXIS M3905-R, AXIS P3905-R Mk III Dome Camera: -30 °C to 55 °C (-22 °F to 131 °F) With AXIS P3904-R Mk II, AXIS P3905-R Mk II, AXIS P3925-R Dome Camera: -40 °C to 60 °C (-40 °F to 140 °F) Humidity: 10-100% RH (condensing)
Lens	Maximum horizontal field of view^a 107° with 2.8 mm M12 lens 87° with 3.6 mm M12 lens 51° with 6 mm M12 lens 39° with 8 mm M12 lens	Storage conditions	-40 °C to 65 °C (-40 °F to 149 °F)
Camera angle adjustment	With 2.8 mm M12 lens Pan: 0° Tilt: 0° With 3.6 mm M12 lens Pan: 0° Tilt: 0° With 6 mm M12 lens Pan: ±20° Tilt: 0°–15° Rotation: ±175° With 8 mm M12 lens Pan: ±30° Tilt: 0°–15° Rotation: ±175°	Dimensions	Height: 59 mm (2.33 in) ø 149.5 mm (5.89 in)
Approvals		Weight	290 g (0.64 lb)
Safety	EN 45545-2, NFPA 130 ^b	Box content	Housing, installation guide, screws and washers
Environment	IEC/EN 60529 IP66, IEC/EN 60529 IP67, ISO 20653 IP6K9K, NEMA 250 Type 4X (ingress of water), IEC/EN 62262 IK10, IEC 60721-3-5 Class 5M3 (vibration and shock), IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78, IEC 60068-2-30	Warranty	Axis 3-year warranty, see www.axis.com/warranty
General		Sustainability	
Casing	IP66/IP67, IP6K9K, NEMA 4X-rated, IK10 impact resistant aluminum and polymer enclosure Color: white NCS S 1002-B	Substance control	PVC free, BRF/CFR free in accordance with JEDEC/ECA Standard JS709 RoHS in accordance with EU RoHS Directive 2011/65/EU and EN 63000:2018 REACH in accordance with (EC) No 1907/2006. For SCIP UUID, see axis.com/partner .
		Materials	Recycled aluminum: 95% Screened for conflict minerals in accordance with OECD guidelines. To read more about sustainability at Axis, go to axis.com/about-axis/sustainability
		Environmental responsibility	axis.com/environmental-responsibility Axis Communications is a signatory of the UN Global Compact, read more at unglobalcompact.org

a. Lenses for AXIS P39 Series network cameras

b. ASTM E662

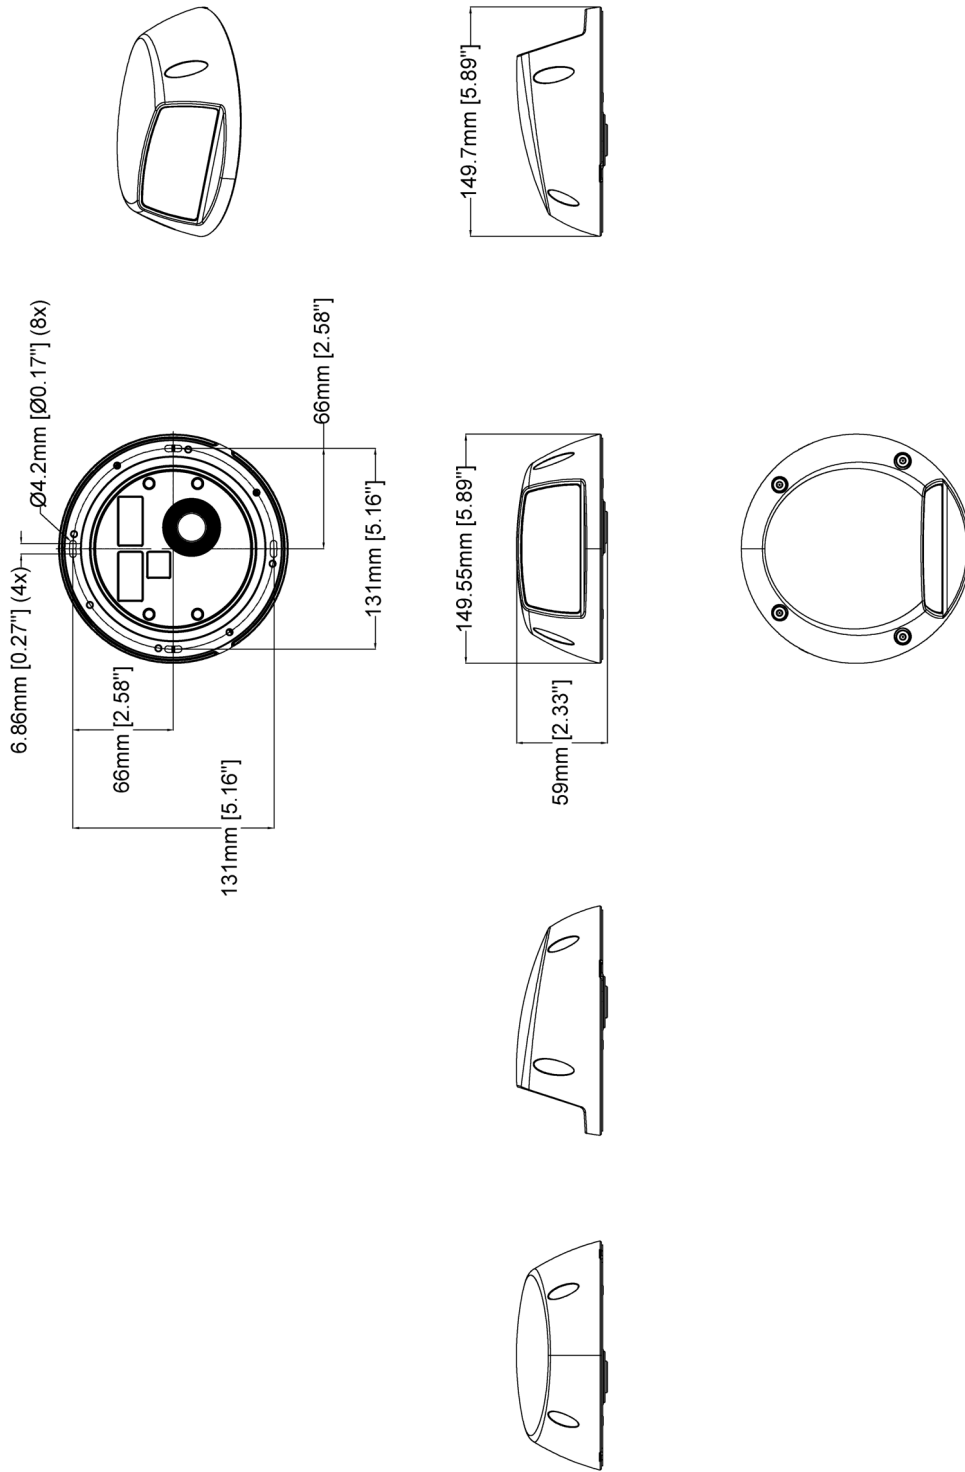

Revision	v.02	Revision date	2023-03-14
Paper size	A4	Release date	2023-01-02
Created by	MIF	Scale	1:4

© 2023 Axis Communications

AXIS COMMUNICATIONS
 www.axis.com
 AXIS TP3826-E Housing