

AXIS Q8752-E Mk II Bispectral PTZ Camera

Thermal detection and visual verification

This bispectral camera offers reliable thermal detection and visual verification. It features 360° infinite pan for fast repositioning and continuous tracking of objects. Electronic image stabilization (EIS) on both channels ensures smooth video. And Lightfinder 2.0 and Forensic WDR deliver true colors and great detail in near darkness or challenging light. Built on a powerful analytics platform, it's easy to add Axis and 3rd party analytics. It's possible to connect this camera using fiber optic cabling to overcome distance and bandwidth limitations.

- > Thermal and visual camera in one
- > 360° infinite pan
- > Dual Electronic Image Stabilization
- > Built-in cybersecurity
- > Thermal palettes



AXIS Q8752-E Mk II Bispectral PTZ Camera

Variants

AXIS Q8752-E Mk II 35 mm 8.3 fps
AXIS Q8752-E Mk II 35 mm 30 fps
AXIS Q8752-E Mk II Zoom 8.3 fps
AXIS Q8752-E Mk II Zoom 30 fps

Camera

Image sensor

Visual: 1/2.8" progressive scan CMOS
Thermal: Uncooled microbolometer 640x480 pixels, pixel size: 17 μ m. Spectral range: 8–14 μ m

Lens

Visual: Varifocal, 4.3–137.6 mm, F1.4–4.0

Horizontal field of view: 58.5°–2.4°

Vertical field of view: 35°–1.3°

Autofocus, auto-iris

Thermal:

35 mm:

Athermalized 35 mm, F1.2

Near focus distance: 31 m (102 ft)

Horizontal field of view: 17°

Vertical field of view: 12.8°

Zoom:

Athermalized 35–105 mm, F1.6

Near focus distance: 22–195 m (72–640 ft)

Near manual focus distance: 7 m (23 ft)

Horizontal field of view: 18°–6°

Vertical field of view: 13.5°–4.5°

Day and night

Visual: Automatic IR-cut filter

Minimum illumination

Visual:

Color: 0.06 lux at 50 IRE, F1.4

B/W: 0.01 lux at 50 IRE, F1.4

Sensitivity

Thermal: NETD < 50 mK

Shutter speed

Visual: 1/66500 s to 2 s

Pan/Tilt/Zoom

Pan: 360° endless, 0.05°–120°/s
Tilt: -90° to +45°, 0.05°–65°/s
Jerk-free movements at low speed: $\pm 0.01^{\circ}/s$ (at 0.05°/s)
Preset accuracy: 0.05°

256 preset positions, guard tour, control queue, focus window, on-screen directional indicator, de-icing control¹, dynamic load balancing²

Visual: 32x optical zoom, 12x digital zoom, total 384x zoom, focus recall

Thermal:

Zoom: 3x thermal zoom and 4x digital zoom, total 12x zoom

35mm: fixed focal, no digital zoom

System on chip (SoC)

Model

ARTPEC-7

Memory

2 GB RAM, 512 MB Flash

Compute capabilities

Deep learning processing unit (DLPU)

Video

Video compression

H.264 (MPEG-4 Part 10/AVC) Baseline, Main and High Profiles

H.265 (MPEG-H Part 2/HEVC) Main Profile

Motion JPEG

Resolution

Visual: 1920x1080 HDTV 1080p to 320x180

Thermal: Sensor is 640x480. Image can be scaled up to 800x600 (SVGA)

Frame rate

Visual: Up to 50/60 fps (50/60 Hz) in HDTV 1080p

Thermal: Up to 8.3 fps or 30 fps depending on model

1. Internal heaters to defrost ice build-up, activated by HTTP API (VAPIX).

2. Pan and tilt motors actively compensate for changes in load conditions induced by external forces such as high winds. This allows minimum power consumption at low wind.

Video streaming

Multiple, individually configurable streams in H.264, H.265 and Motion JPEG
Axis Zipstream technology in H.264 and H.265
Controllable frame rate and bandwidth
VBR/ABR/MBR H.264/H.265
Low latency mode

WDR

Forensic WDR: Up to 120 dB depending on scene

Image settings

Visual: Saturation, contrast, brightness, sharpness, white balance, day/night threshold, tone mapping, exposure control, exposure zones, defogging, compression, dynamic text and image overlay, 32 individual polygon privacy masks, electronic image stabilization
Thermal: Compression, brightness, sharpness, contrast, local contrast, exposure control, exposure zones, text and image overlay, electronic image stabilization

Audio

Streaming

One-way (simplex, half duplex)

Input

External microphone input or line input

Encoding

24bit LPCM, AAC-LC 8/16/32/48 kHz, G.711 PCM 8 kHz, G.726 ADPCM 8 kHz, Opus 8/16/48 kHz
Configurable bitrate

Network

Network protocols

IPv4, IPv6 USGv6, ICMPv4/ICMPv6, HTTP, HTTPS³, HTTP/2, TLS, QoS Layer 3 DiffServ, FTP, SFTP, CIFS/SMB, SMTP, mDNS (Bonjour), UPnP®, SNMP v1/v2c/v3 (MIB-II), DNS/DNSv6, DDNS, NTP, PTP, NTS, RTSP, RTP, SRTP/RTSPS, TCP, UDP, IGMPv1/v2/v3, RTCP, ICMP, DHCPv4/v6, ARP, SSH, LLDP, CDP, MQTT v3.1.1, Secure syslog (RFC 3164/5424, UDP/TCP/TLS), Link-Local address (ZeroConf)

System integration

Application Programming Interface

Open API for software integration, including VAPIX® and AXIS Camera Application Platform (ACAP); specifications at axis.com/developer-community.

One-click cloud connection

ONVIF® Profile G, ONVIF® Profile M, ONVIF® Profile S, and ONVIF® Profile T, specifications at onvif.org

Video management systems

Compatible with AXIS Camera Station Edge, AXIS Camera Station Pro, AXIS Camera Station 5, and video management software from Axis' partners available at axis.com/vms.

Onscreen controls

Image stabilization
Day/night shift
Video streaming indicator
IR illumination
Privacy masks
Media clip
Focus recall zone
Timed wiper
Wiper
Heater

Edge-to-edge

Microphone pairing
Speaker pairing

Event conditions

Application
Device status: above/below/within operating temperature, IP address blocked/removed, live stream active, network lost, new IP address, PTZ power failure, ring power overcurrent protection, system ready
Digital audio: digital signal contains Axis metadata, digital signal has invalid sample rate, digital signal missing, digital signal okay
Edge storage: recording ongoing, storage disruption, storage health issues detected
I/O: digital input is active, manual trigger, virtual input is active
MQTT: MQTT client connected
PTZ: PTZ control queue, PTZ malfunctioning, PTZ movement, PTZ preset position reached, PTZ ready
Scheduled and recurring: schedule
Video: average bitrate degradation, day-night mode

3. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (openssl.org), and cryptographic software written by Eric Young (eay@cryptsoft.com).

Event actions

Day-night mode

Guard tour

I/O: toggle I/O once, toggle I/O while the rule is active

Illumination: use lights, use lights while the rule is active

MQTT: send MQTT publish message

Notification: HTTP, HTTPS, TCP and email

Overlay text

PTZ: PTZ preset, start/stop guard tour

Recordings: record audio, record audio while the rule is active

Security: erase configuration

SNMP trap messages: send, send while the rule is active

Images or video clips: FTP, SFTP, HTTP, HTTPS, network share and email

WDR mode

Wiper: use wiper

Built-in installation aids

Pixel counter, level grid

Analytics

Applications

Included

AXIS Motion Guard, AXIS Fence Guard, AXIS Loitering Guard

AXIS Video Motion Detection, Orientation AID PTZ, audio detection, advanced gatekeeper

Support for AXIS Camera Application Platform enabling installation of third-party applications, see axis.com/acap

Approvals

Product markings

UL/cUL, CE, KC, VCCI, RCM

Supply chain

TAA compliant

EMC

CISPR 35, CISPR 32 Class A, EN 55035, EN 55032 Class A, EN 50121-4, EN 61000-6-1, EN 61000-6-2

Australia/New Zealand: RCM AS/NZS CISPR 32 Class A

Canada: ICES(A)/NMB(A)

Japan: VCCI Class A

Korea: KS C 9835, KS C 9832 Class A

USA: FCC Part 15 Subpart B Class A

Railway: IEC 62236-4

Safety

CAN/CSA C22.2 No. 62368-1 ed. 3,

IEC/EN/UL 62368-1 ed. 3

Environment

IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78, IEC/EN 60529 IP66, IEC/EN 62262 IK10, NEMA 250 Type 4X, NEMA TS 2 (2.2.7-2.2.9), ISO 12944-6 C5, MIL-STD-810H (Method 501.7, 502.7, 505.7 506.6, 507.6, 509.7, 521.4)

Network

NIST SP500-267, IPv6 USGv6

Cybersecurity

ETSI EN 303 645, BSI IT Security Label, FIPS 140

Cybersecurity

Edge security

Software: Signed OS, brute force delay protection, digest authentication and OAuth 2.0 RFC6749 Client Credential Flow/OpenID Authorization Code Flow for centralized ADFS account management, password protection, Axis Cryptographic Module (FIPS 140-2 level 1)

Secure keystore: TPM 2.0 (CC EAL4+, FIPS 140-2 Level 2)

Secure boot, encrypted filesystem (AES-XTS-Plain64 256bit)

Network security

IEEE 802.1X (EAP-TLS, PEAP-MSCHAPv2)⁴, IEEE 802.1AE (MACsec PSK/EAP-TLS), IEEE 802.1AR, HTTPS/HSTS, TLS v1.2/v1.3⁴, Network Time Security (NTS), X.509 Certificate PKI, host-based firewall

Documentation

AXIS OS Hardening Guide

Axis Vulnerability Management Policy

Axis Security Development Model

AXIS OS Software Bill of Material (SBOM)

To download documents, go to axis.com/support/cybersecurity/resources

To read more about Axis cybersecurity support, go to axis.com/cybersecurity

4. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (openssl.org), and cryptographic software written by Eric Young (eay@cryptsoft.com).

General

Casing

IP66-, NEMA 4X- and IK10-rated⁵ powder coated aluminum

Color: white NCS S 1002-B

Long-life silicone wiper

Weathershield: high-impact UV-stabilized thermoplastic

This product can be repainted.

For repainting instructions, go to the product's support page. For information about the impact on warranty, go to axis.com/warranty-implication-when-repainting.

Power

52–58 V DC, typical 25 W, max 185 W

Power loss recovery⁶

Surge protection 2kV, according to EN 61000-4-5

Connectors

Audio: 3.5 mm mic/line in

I/O: 6-pin 2.5 mm terminal block for 4 configurable inputs/outputs

Network: Shielded RJ45 10BASE-T/100BASE-TX/1000BASE-T, SFP slot (SFP module not included)⁷

Power: DC input, terminal block

Illumination (in upper part of positioning unit)

Storage

Support for microSD/microSDHC/microSDXC card

Support for SD card encryption (AES-XTS-Plain64 256bit)

Recording to network-attached storage (NAS)

For SD card and NAS recommendations see axis.com

Operating conditions

-40 °C to 60 °C (-40 °F to 140 °F)

Maximum temperature according to NEMA TS 2 (2.2.7):

74 °C (165 F)

Start-up temperature: -40 °C (-40 °F)

Humidity 10–100% RH (condensing)

Wind load when PTZ operational

37 m/s (83 mph)⁸, 45 m/s (100 mph) without weathershield

With AXIS PT IR Illuminator Kit C: 40 m/s (90 mph), 52 m/s (116 mph) without weathershield

Maximum effective projected area (EPA): 0.121 m²

Storage conditions

Temperature: -40 °C to 65 °C (-40 °F to 149 °F)

Humidity: 5–95% RH (non-condensing)

Dimensions

244 x 360 x 582 mm (9.5 x 14 x 23 in)

For the overall product dimensions, see the dimension drawing in this datasheet.

Effective Projected Area (EPA): 0.121 m² (0.39 ft²)

Weight

35 mm: 14.9 kg (32.8 lb)

Zoom: 15.3 kg (33.7 lb)

Box content

Camera, installation guide, connector kit

Optional accessories

AXIS Surveillance Cards, AXIS T94J01A Wall Mount, AXIS T94N01G Pole Mount, AXIS T95A64 Corner Bracket, AXIS Washer Kit B, AXIS Cable 24 V DC/24–240 V AC 22 mh, AXIS T8611 SFP Module LC.LX, AXIS T8612 SFP Module LC.SX, AXIS PT IR Illuminator Kit C, AXIS T99 Illuminator Bracket Kit A, Power supply DIN PS56 480 W, AXIS T61 Audio and I/O Interface Series
For more accessories, see axis.com/products/axis-q8752-e-mk-ii#compatible-products

System tools

AXIS Site Designer, AXIS Device Manager, product selector, accessory selector, lens calculator

Available at axis.com

Languages

English, German, French, Spanish, Italian, Russian, Simplified Chinese, Japanese, Korean, Portuguese, Polish, Traditional Chinese, Dutch, Czech, Swedish, Finnish, Turkish, Thai, Vietnamese

Warranty

5-year warranty, see axis.com/warranty

Export control

This product is subject to export control regulations, and you should always comply with all applicable national and international export or re-export control regulations.

Part numbers

Available at axis.com/products/axis-q8752-e-mk-ii#part-numbers

5. Excluding front window.

6. IP data and home position retained, and guard tour and other events resumed.

7. If a network link is established via both the SFP slot and the RJ45 connector, the former acts as the primary link and the latter as the fail-over link.

8. The values shown are based on results from actual wind tunnel testing. For drag force calculations, use maximum effective projected area (EPA).

Sustainability

Substance control

PVC free

RoHS in accordance with EU RoHS Directive 2011/65/
EU and 2015/863, and standard EN IEC 63000:2018
REACH in accordance with (EC) No 1907/2006. For SCIP
UUID, see echa.europa.eu

Materials

Screened for conflict minerals in accordance with OECD
guidelines

To read more about sustainability at Axis, go to axis.com/about-axis/sustainability

Environmental responsibility

axis.com/environmental-responsibility

Axis Communications is a signatory of the UN Global
Compact, read more at unglobalcompact.org


Detect, Recognize, Identify (DRI)

AXIS Q8752-E Mk II (35 mm lens)		
	Definition	Distance
Detect	1.5 pixels	Human: 1079 m (3539 ft) Vehicle: 3307 m (10850 ft)
Recognize	6 pixels	Human: 270 m (886 ft) Vehicle: 827 m (2710 ft)
Identify	12 pixels	Human: 135 m (443 ft) Vehicle: 413 m (1355 ft)

AXIS Q8752-E Mk II (35–105 mm lens)		
	Definition	Distance
Detect	1.5 pixels	Human: 3056 m (10020 ft) Vehicle: 9371 m (30740 ft)
Recognize	6 pixels	Human: 764 m (2505 ft) Vehicle: 2343 m (7685 ft)
Identify	12 pixels	Human: 382 m (1250 ft) Vehicle: 1172 m (3844 ft)

We used Johnson's criteria to calculate the theoretical values shown in the table. Human and vehicle sizes were assumed to be 1.8 x 0.5 m and 4.0 x 1.5 m, respectively.


Thoroughly evaluate your scene using, for example, AXIS Site Designer. Consider factors like weather conditions when determining actual detection distances.

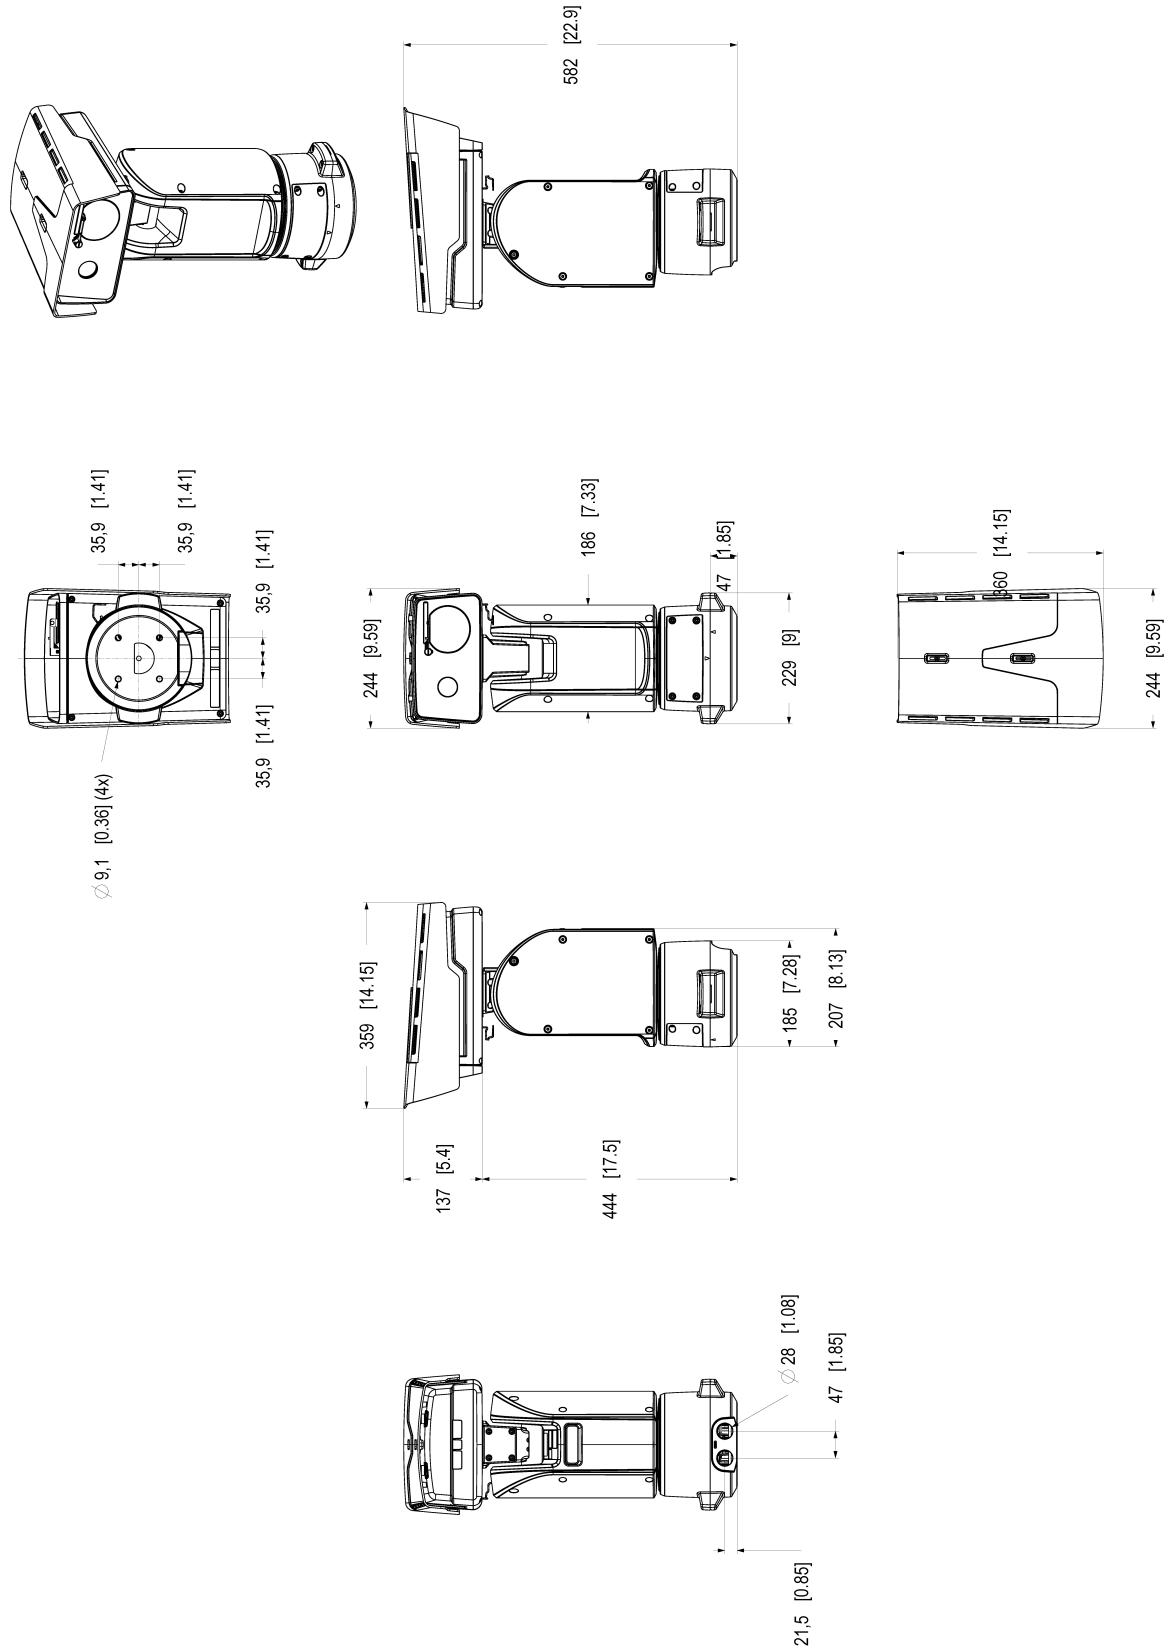

AXIS Q8752-E MkII Bispectral PTZ Camera

AXIS
COMMUNICATIONS

Dimensions in mm [Inch]

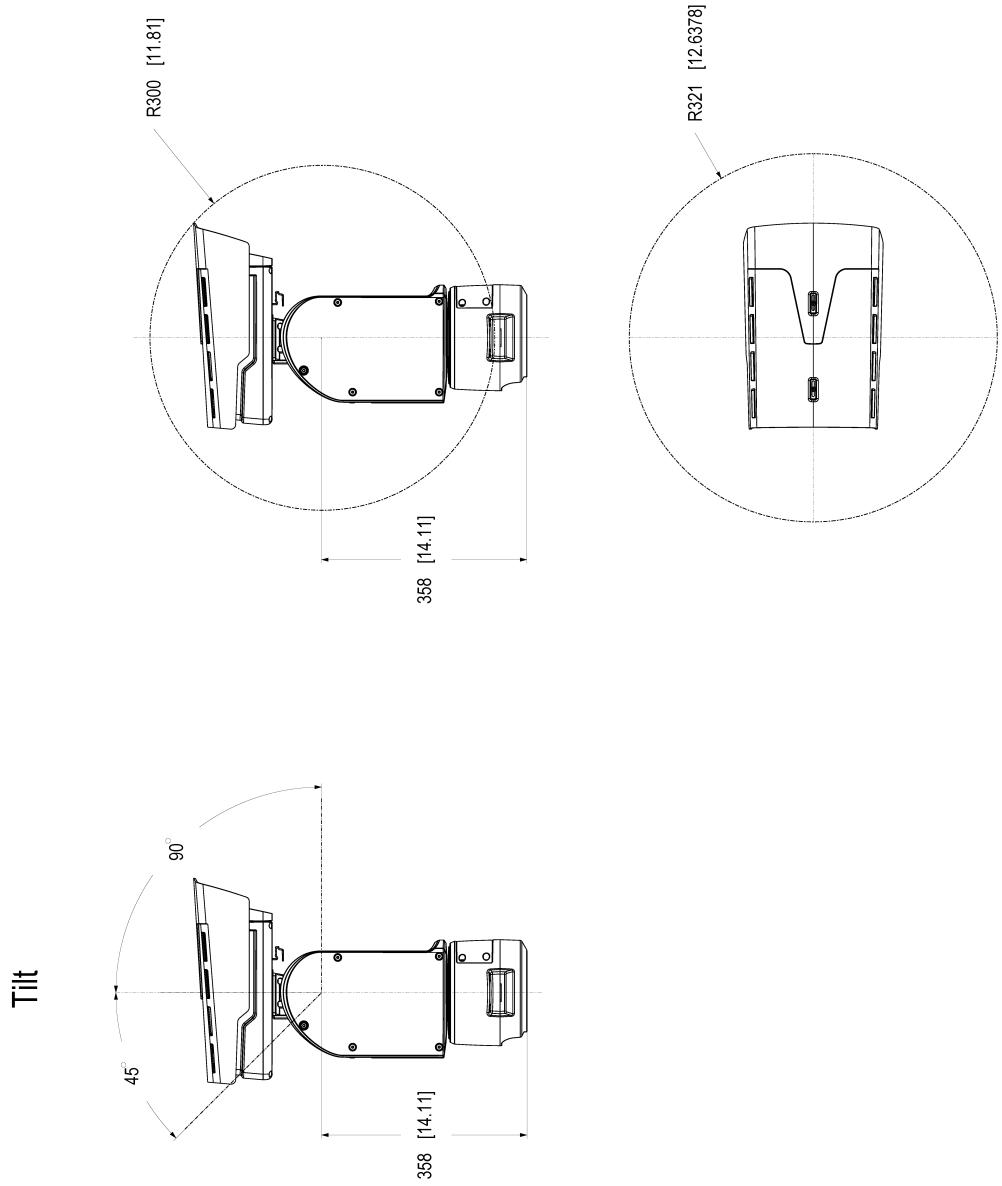

Electronic image stabilization

Electronic image stabilization (EIS) provides smooth video in situations where a camera is subject to vibrations. Built-in gyroscopic sensors continuously detect the camera's movements and vibrations, and they automatically adjust the frame to ensure you always capture the details you need. Electronic image stabilization relies on different algorithms for modeling camera motion, which are used to correct the images.

Lightfinder

The Axis Lightfinder technology delivers high-resolution, full-color video with a minimum of motion blur even in near darkness. Because it strips away noise, Lightfinder makes dark areas in a scene visible and captures details in very low light. Cameras with Lightfinder discern color in low light better than the human eye. In surveillance, color may be the critical factor to identify a person, an object, or a vehicle.

Forensic WDR

Axis cameras with wide dynamic range (WDR) technology make the difference between seeing important forensic details clearly and seeing nothing but a blur in challenging light conditions. The difference between the darkest and the brightest spots can spell trouble for image usability and clarity. Forensic WDR effectively reduces visible noise and artifacts to deliver video tuned for maximal forensic usability.

Thermal palettes

A mode that allows the user to select a color range to show relative temperature differences in a scene. The user can choose between black-and-white ranges, color ranges, or a mix between the two. The same input (measured thermal radiation) can result in different visual appearance depending on how each pixel value is mapped to a color range.

Zipstream

The Axis Zipstream technology preserves all the important forensic in the video stream while lowering bandwidth and storage requirements by an average of 50%. Zipstream also includes three intelligent algorithms, which ensure that relevant forensic information is identified, recorded, and sent in full resolution and frame rate.