

## AXIS P1425-LE Mk II Network Camera

Compact, cost-effective HDTV surveillance with OptimizedIR

With Lightfinder and WDR – Forensic Capture, the AXIS P1425-LE Mk II bullet camera provides excellent image quality in HDTV 1080p resolution, even in complex light conditions. Axis' OptimizedIR automatically illuminates any scene taking place in complete darkness. The camera features Corridor Format, pixel counter, remote focus and zoom, as well as P-Iris control – ensuring optimal depth of field, resolution, image contrast and clarity. The I/O port can be used for notification to an alarm panel or control of a relay. Axis' Zipstream technology significantly reduces bandwidth and storage requirements. The outdoor-ready camera comes with an adjustable weather shield.

- > **Lightfinder and WDR – Forensic Capture**
- > **Axis' Zipstream technology**
- > **HDTV 1080p at up to 60 fps**
- > **Built-in IR LEDs with OptimizedIR, 20 meters (66 feet)**
- > **I/O support and Edge Storage**



# AXIS P1425-LE Mk II Network Camera

Camera		WDR mode
Image sensor	Progressive scan CMOS 1/2.8"	PTZ control, Overlay text IR illumination
Lens	3–10.5 mm, F1.4 Horizontal field of view 93°–33° Vertical field of view 50°–18° Varifocal, Autofocus, Remote focus and zoom, P-Iris control, IR corrected	
Day and night	Automatically removable infrared-cut filter	
Minimum illumination	Color: 0.16 lux at F1.4, 25/30 fps Color: 0.32 lux at F1.4, 50/60 fps B/W: 0.03 lux at F1.4, 25/30 fps B/W: 0.06 lux at F1.4, 50/60 fps 0 lux with IR illumination on	Color: 0.1 lux at F1.4 B/W: 0.01 lux at F1.4 0 lux with IR illumination on *at shutter speed 1/12sec
Shutter time	1/66500 s to 1 s	
Video		
Video compression	H.264 High, Main and Baseline profiles (MPEG-4 Part 10/AVC) Motion JPEG	
Resolutions	HDTV 1080p 25/30 fps (WDR): 1920x1080 to 160x90 HDTV 1080p 50/60 fps (no WDR): 1920x1080 to 160x90 Meets relevant parts of SMPTE 274M (HDTV 1080p)	
Frame rate	Up to 50/60 fps (50/60 Hz, no WDR) in all resolutions	
Video streaming	Multiple, individually configurable streams in H.264 and Motion JPEG Axis' Zipstream technology in H.264 Controllable frame rate and bandwidth VBR/MBR H.264	
Image settings	Manual shutter time, Compression, Color, Brightness, Sharpness, White balance, Exposure control, Exposure zones, Fine tuning of behavior at low light, Text and image overlay, Privacy masks, IR illumination Wide Dynamic Range – Forensic Capture: Up to 120 dB depending on scene, Mirroring of images Rotation: 0°, 90°, 180°, 270°, including Corridor Format	
Pan/Tilt/Zoom	Digital PTZ	
Network		
Security	Password protection, IP address filtering, HTTPS <sup>a</sup> encryption, IEEE 802.1X <sup>a</sup> network access control, Digest authentication, User access log	
Supported protocols	IPv4/v6, HTTP, HTTPS <sup>a</sup> , SSL/TLS <sup>a</sup> , QoS Layer 3 DiffServ, FTP, CIFS/SMB, SMTP, Bonjour, UPnP <sup>TM</sup> , SNMP v1/v2c/v3 (MIB-II), DNS, DynDNS, NTP, RTSP, RTP, SFTP, TCP, UDP, IGMP, RTCP, ICMP, DHCP, ARP, SOCKS, SSH	
System integration		
Application Programming Interface	Open API for software integration, including VAPIX <sup>®</sup> and AXIS Camera Application Platform; specifications at <a href="http://www.axis.com">www.axis.com</a> ONVIF <sup>®</sup> Profiles S and G, specifications at <a href="http://www.onvif.org">www.onvif.org</a>	
Analytics	AXIS Video Motion Detection 3 Support for AXIS Camera Application Platform enabling installation of AXIS Cross Line Detection, AXIS Digital Autotracking and third-party applications, see <a href="http://www.axis.com/acap">www.axis.com/acap</a>	
Event triggers	Analytics Detectors: Day/Night Mode, Live Stream Accessed, Tampering Hardware: Network, Temperature Input Signal: Manual Trigger, Virtual Inputs Storage: Disruption, Recording System: System Ready Time: Use Schedule, Recurrences	
Event actions	File upload: FTP, SFTP, HTTP, HTTPS network share and email Notification: email, HTTP, HTTPS and TCP and SNMP trap External output activation Video recording to edge storage Pre- and post-alarm video buffering	
Built-in installation aids	Pixel counter, Remote zoom (3.5x optical), Remote focus	
Data streaming	Event data	
General		
Casing	IP66, IP67- and NEMA 4X-rated casing (polyester polycarbonate blend)	
Sustainability	PVC free	
Memory	512 MB RAM, 256 MB Flash	
Power	Power over Ethernet IEEE 802.3af/802.3at Type 1 Class 3 Typical: 4.6 W, max 11 W	
Connectors	RJ45 10BASE-T/100BASE-TX PoE I/O: 4-pin terminal block for 1 alarm input and 1 output	
IR illumination	Optimized IR, highly efficient LEDs with adjustable intensity and angle of illumination. Range up to 20 m (66 ft)	
Storage	Support for microSD/microSDHC/microSDXC card Support for recording to dedicated network-attached storage (NAS) For SD card and NAS recommendations see <a href="http://www.axis.com">www.axis.com</a>	
Operating conditions	–30 °C to 50 °C (–22 °F to 122 °F) Humidity 10–100% RH (condensing)	
Storage conditions	–40 °C to 65 °C (–40 °F to 149 °F)	
Approvals	EN 61000-6-1, EN 61000-6-2, EN 50121-4, IEC 62236-4, EN 50581, EN 55024, EN 55032 Class A, FCC Part 15 Subpart B Class A, ICES-003 Class A, VCCI Class A, RCM AS/NZS CISPR 22 Class A, KCC KN-32 Class A, KN-35, IEC/EN/UL 60950-1, IEC/EN/UL 60950-22, IEC/EN 62471, IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-30, IEC 60068-2-78, IEC/EN 60529 IP66/IP67, IEC/EN 62262 IK08, NEMA 250 Type 4X, IEC 60825-1	
Weight	With weather shield: 800 g (1.75 lb)	
Dimensions	Ø132 x 260 mm (Ø5 3/16 x 10 1/4 in)	
Included accessories	Mounting bracket, Drill template, Installation Guide, Windows decoder 1-user license AXIS Weather Shield L	
Optional accessories	AXIS T94F01M J-Box/Gang Box Plate AXIS T91A47 Pole Mount AXIS T94P01B Corner Bracket AXIS T94F01P Conduit Back Box AXIS Weather Shield K Axis PoE Midspans For more accessories, see <a href="http://www.axis.com">www.axis.com</a>	
Video management software	AXIS Companion, AXIS Camera Station, Video management software from Axis' Application Development Partners available on <a href="http://www.axis.com/techsup/software">www.axis.com/techsup/software</a>	
Languages	English, German, French, Spanish, Italian, Russian, Simplified Chinese, Japanese, Korean, Portuguese, Traditional Chinese	
Warranty	Axis 3-year warranty and AXIS Extended Warranty option, see <a href="http://www.axis.com/warranty">www.axis.com/warranty</a>	

a. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (<http://www.openssl.org/>), and cryptographic software written by Eric Young ([ey@cryptsoft.com](mailto:ey@cryptsoft.com)).

## Environmental responsibility:

[www.axis.com/environmental-responsibility](http://www.axis.com/environmental-responsibility)

Lund, January, 2017

## **Regarding general tender specifications for Government projects in Thailand**

At Axis Communications, we believe in a close cooperation with our partners and provide a full range of sales, marketing and technical support from our Headquarters in Sweden.

Following the recently adopted requirements by local authorities, Axis submits this document in order to fulfill the specific needs of the market in Thailand.

In regard to the level of minimum illumination needed to obtain images as according to Axis standard of image quality, we provide the following information for The Minimum illumination

The following pages detail additional tests we have done with our cameras to provide minimum illuminations under different light conditions and shutter speeds.

### ***About Axis' measurement of minimum illumination***

*Axis measures the minimum amount of illumination required by Axis network video products to produce images of a specified quality. The MMI (Measurement of Minimum Illumination) method described in our technical note applies solely to camera blocks developed by Axis Communications AB. The Axis MMI method is based on the CEA-639 standard, "Consumer Camcorder or Video Camera Low Light Performance". For detailed information, see the AXIS technical note on the MMI method.*

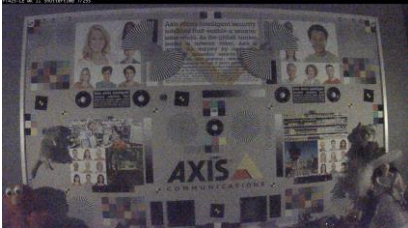




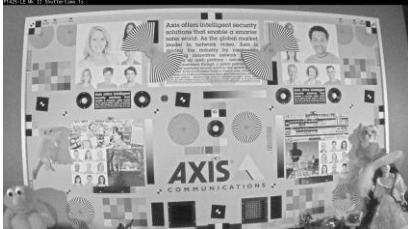
### **References:**

AXIS Technical Note (MMI): [http://www.axis.com/files/tech\\_notes/Axis\\_MMI.pdf](http://www.axis.com/files/tech_notes/Axis_MMI.pdf)

AXIS whitepaper (The challenge of minimum illumination):

[http://www.axis.com/files/whitepaper/wp\\_light\\_sensitivity\\_41137\\_en\\_1011\\_lo.pdf](http://www.axis.com/files/whitepaper/wp_light_sensitivity_41137_en_1011_lo.pdf)

Test Environment and Result for P1425-LE Mk II:

Room Dimension	4m x 5m x 2.8m	
Object Distance	150 cm	
Room illumination	Color mode : 0.1 Lux	B/W mode : 0.01 Lux
Shutter time:1/25 Sec		
Shutter time:1/12 Sec		
Shutter time : 1 Sec		

From the test result above, we confirm that P1425-LE Mk II can perform color mode at 0.1 Lux and B&W mode at 0.01 Lux.

Best Regards



Peter Friberg  
Director Solution Management  
Axis Communications AB