


AXIS P1455-LE-3 License Plate Verifier Kit

Easy, cost-effective kit for slow traffic

AXIS P1455-LE-3 includes an HDTV 1080p fixed bullet camera and comes with AXIS License Plate Verifier preinstalled. Featuring freeflow mode, it's ideal for use in slow-speed traffic, such as in city centers, gated communities, and campuses. The compact and robust IK10-rated camera includes shock detection for installation in all environments. Featuring a 29 mm telephoto lens, this cost-effective solution can read license plates from 7 to 20 meters (20-65 feet). It includes Axis image enhancement technologies as well as Optimized IR – to ensure sharp images for license plate reading 24/7. Furthermore, it offers tight integration with AXIS Camera Station.

- > [Ideal for slow-speed traffic](#)
- > [Read license plates from 7-20 m \(20-65 ft\)](#)
- > [Proven for tough weather conditions](#)
- > [OptimizedIR for recognition in darkness](#)
- > [Integration with AXIS Camera Station](#)

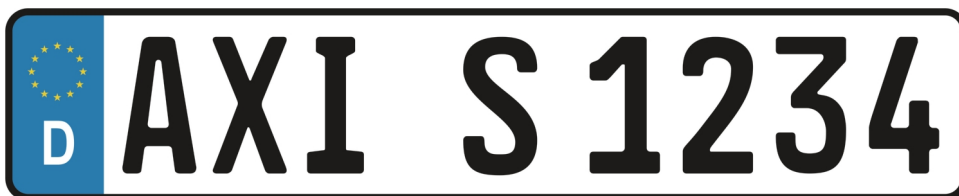

AXIS License Plate Verifier

Application

| | |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Compute platform | Edge |
| Licenses | AXIS License Plate Verifier license included. |
| Configuration | Web configuration included |
| Settings | Define area of interest in scene. Allow- and blocklist logic. Barrier mode: Open to all, open to allowlisted, open to all but blocklisted. Minimum width: 130 pixels for one-row license plates; 70 pixels for two-row license plates. FIFO event log entries including thumbnail image of license plate. Up to 1000 entries on camera storage. Up to 100 000 entries on AXIS Surveillance Cards. Configurable retention time of stored events |
| Detection range | 7.0 to 20 m (20 to 65 ft) |
| Vehicle speed | Up to 70 km/h (45 mph) |
| Detection time | Less than 1 second. |

Scenarios

| | |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Typical applications | License plate recognition in slow speed traffic In Freeflow, the application can detect and read license plates in slow speed traffic on larger access roads, city centers and enclosed areas like campuses, ports or airports. This allows for LPR-forensic search and LPR triggered events in a VMS such as ACS. Vehicle access control In Access control, the application monitors entrances and exits of gated areas such as parking areas. The application verifies detected license plates against an allowlist or a blocklist for granting or denying access to an area. Maximum 10,000 license plates in each list. For a scenario where greater functionality and flexibility are required, use AXIS A1001 Network Door Controller. AXIS A1001 with AXIS Entry Manager software supports access rules including schedules and a more detailed event log. Multiple partner software that support a great number of credentials and features are available. |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

System integration

| | |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Application Programming Interface | Open API for software integration. |
| Event streaming | Integrates with camera event management system to enable event streaming to management software and camera actions such as I/O control, notification, and edge storage. |
| Supported devices | Direct integration with AXIS A1001 Network Door Controller and AXIS A91 Network I/O Relay Modules. |

General

| | |
|---------------------|--------------------------------------------------------------------------------------------------------------|
| Supported countries | For a complete list of supported countries, go to the product page at axis.com |
| Languages | English |

AXIS P1455-LE-3 License Plate Verifier Kit

| | | |
|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| Camera | | |
| Image sensor | 1/2.8" progressive scan RGB CMOS | |
| Lens | Varifocal, 10.9-29 mm, F1.7-1.7 Horizontal field of view 29°-11° Vertical field of view 17°-6.5° Varifocal, Remote focus and zoom, P-Iris control, IR corrected | |
| Day and night | Automatically removable infrared-cut filter | |
| Minimum illumination | Color: 0.07 lux, at 50 IRE F1.7 B/W: 0.01 lux, at 50 IRE F1.7 0 lux with IR illumination on | |
| Shutter speed | 1/66500 s to 2 s | |
| System on chip (SoC) | | |
| Model | ARTPEC-7 | |
| Memory | 1024 MB RAM, 512 MB Flash | |
| Video | | |
| Video compression | H.264 (MPEG-4 Part 10/AVC) Baseline, Main and High Profiles H.265 (MPEG-H Part 2/HEVC) Main Profile Motion JPEG | |
| Resolution | 1920x1080 to 160x90 | |
| Frame rate | With Forensic WDR: Up to 25/30 fps (50/60 Hz) in all resolutions No WDR: Up to 50/60 fps (50/60 Hz) in all resolutions | |
| Video streaming | Multiple, individually configurable streams in H.264, H.265 and Motion JPEG Axis Zipstream technology in H.264 and H.265 Controllable frame rate and bandwidth VBR/ABR/MBR H.264/H.265 Low latency mode Video streaming indicator | |
| Multi-view streaming | Up to 8 individually cropped out view areas | |
| Image settings | Saturation, contrast, brightness, sharpness, Forensic WDR: Up to 120 dB depending on scene, white balance, day/night threshold, exposure mode, exposure zones, defogging, compression, orientation: auto, 0°, 90°, 180°, 270° including Corridor Format, mirroring of images, dynamic text and image overlay, privacy masks, motion-adaptive exposure, electronic image stabilization | |
| Pan/Tilt/Zoom | Digital PTZ, digital zoom | |
| Audio | | |
| Audio streaming | Audio in, simplex, two-way audio via edge-to-edge technology | |
| Audio encoding | 24bit LPCM, AAC-LC 8/16/32/48 kHz, G.711 PCM 8 kHz, G.726 ADPCM 8 kHz, Opus 8/16/48 kHz Configurable bit rate | |
| Audio input/output | External microphone input or line input, digital audio input, network speaker pairing | |
| Network | | |
| Security | Password protection, IP address filtering, HTTPS ^a encryption, IEEE 802.1X (EAP-TLS) ^a network access control, digest authentication, user access log, centralized certificate management, brute force delay protection, signed firmware, secure boot, signed video, Axis Edge Vault with Axis device ID | |
| Network protocols | IPv4, IPv6 USGv6, ICMPv4/ICMPv6, HTTP, HTTPS ^a , HTTP/2, TLS ^a , QoS Layer 3 DiffServ, FTP, SFTP, CIFS/SMB, SMTP, mDNS (Bonjour), UPnP [®] , SNMP v1/v2c/v3 (MIB-II), DNS/DNSv6, DDNS, NTP, NTS, RTSP, RTP, SRTP/RTSPS, TCP, UDP, IGMPv1/v2/v3, RTCP, ICMP, DHCPv4/v6, ARP, SSH, LLDP, CDP, MQTT v3.1.1, Syslog, Link-Local address (ZeroConf) | |
| System integration | | |
| Application Programming Interface | Open API for software integration, including VAPIX [®] and AXIS Camera Application Platform; specifications at axis.com One-Click Cloud Connection ONVIF [®] Profile G, ONVIF [®] Profile M, ONVIF [®] Profile S and ONVIF [®] Profile T, specification at onvif.org | |
| Onscreen controls | Day/night shift Defogging Wide dynamic range IR illumination Electronic image stabilization | |
| | | Video streaming indicator |
| Event conditions | Analytics Detectors: live stream accessed, video motion detection, audio detection, day/night mode, shock detection, tampering Hardware: network, temperature Input Signal: digital input port, manual trigger, virtual inputs Storage: disruption, recording System: system ready Time: recurrence, use schedule Supervised input changed state MQTT subscribe | |
| Event actions | Record video: SD card and network share Upload of images or video clips: FTP, SFTP, HTTP, HTTPS, network share and email Pre- and post-alarm video or image buffering for recording or upload Notification: email, HTTP, HTTPS, TCP and SNMP trap PTZ: PTZ preset, start/stop guard tour Overlay text, external output activation, day/night mode MQTT publish | |
| Built-in installation aids | Pixel counter, remote zoom (3x optical), remote focus, auto rotation | |
| Analytics | | |
| Compute capabilities | Machine learning processing unit (MLPU) | |
| Metadata | Object data: Classes: humans, faces, vehicles, license plates Confidence, position Event data: Producer reference, scenarios, trigger conditions | |
| Applications | Included AXIS License Plate Verifier AXIS Video Motion Detection, active tampering, shock detection Support for AXIS Camera Application Platform enabling installation of third-party applications, see axis.com/acap | |
| General | | |
| Casing | IP66/IP67-, NEMA 4X-, and IK10-rated casing Polycarbonate blend and aluminium Color: white NCS S 1002-B | |
| Sustainability | PVC free, BFR/CFR free | |
| Power | Power over Ethernet IEEE 802.3af/802.3at Type 1 Class 3 Typical: 8.5 W, max 12.95 W 12-28 V DC, typical 7.8 W, max 12.95 W | |
| Connectors | Shielded RJ45 10BASE-T/100BASE-TX/1000BASE-T 3.5 mm mic/line in Terminal block for 1 supervised alarm input and 1 output (12 V DC output, max. load 25 mA) DC input | |
| IR illumination | Optimized IR with power-efficient, long-life 850 nm IR LEDs Range of reach 45 m (150 ft) or more depending on the scene | |
| Storage | Support for microSD/microSDHC/microSDXC card Support for SD card encryption (AES-XTS-Plain64 256bit) Recording to network-attached storage (NAS) For SD card and NAS recommendations see axis.com | |
| Operating conditions | -40 °C to 60 °C (-40 °F to 140 °F) Maximum temperature according to NEMA TS2 (2.2.7): 74 °C (165 °F) Humidity 10-100% RH (condensing) | |
| Storage conditions | -40 °C to 65 °C (-40 °F to 149 °F) Humidity 5-95% RH (non-condensing) | |
| Approvals | EMC EN 55032 Class A, EN 50121-4, IEC 62236-4, EN 55035, EN 61000-3-3, EN 61000-6-1, EN 61000-6-2, FCC Part 15 Subpart B Class A, ICES-3(A)/NMB-3(A), VCCI Class A, RCM AS/NZS CISPR 32 Class A Safety IEC/EN/UL 62368-1, IEC/EN/UL 60950-22, IS 13252, IEC 62471 Environment IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78, IEC/EN 60529 IP66/IP67, IEC/EN 62262 IK10, NEMA 250 Type 4X, NEMA TS 2 (2.2.7-2.2.9) Network NIST SP500-267 | |

| | |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Weight | With weather shield: 1.2 kg (2.65 lb) |
| Dimensions | Ø132 x 264 mm (Ø5.2 x 10.4 in) |
| Included accessories | Installation guide, Windows® decoder 1-user license, drill hole template, connector kit, mounting bracket, Torx® L-keys AXIS Weather Shield L |
| Optional accessories | AXIS T94F01M J-Box/Gang Box Plate, AXIS T91A47 Pole Mount, AXIS T94P01B Corner Bracket, AXIS T94F01P Conduit Back Box, AXIS Weather Shield K, Axis PoE Midspans For more accessories, see axis.com |
| Video management software | AXIS Companion, AXIS Camera Station, video management software from Axis' Application Development Partners available at axis.com/vms |

| | |
|------------------|---------------------------------------------------------------------------------------------------------------------------|
| Languages | English, German, French, Spanish, Italian, Russian, Simplified Chinese, Japanese, Korean, Portuguese, Traditional Chinese |
| Warranty | 5-year warranty, see axis.com/warranty |

- a. *This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (openssl.org), and cryptographic software written by Eric Young (eay@cryptsoft.com).*

Environmental responsibility:

axis.com/environmental-responsibility