


# AXIS M3067-P Network Camera

## 6 MP mini dome with 360° panoramic view

AXIS M3067-P can deliver 360° panoramic overviews as well as a variety of dewarped views. It supports day/night functionality for improved sensitivity in poor light. And, Axis Lightfinder and Forensic WDR for true colors and great details in challenging light. Furthermore, it features Axis Zipstream with H.264/H.265 and a powerful capacity for analytics. AXIS M3067-P is delivered factory focused and features digital roll functionality for easy installation. Made from environmentally-friendly materials, it's re-paintable to blend in with any surroundings and there's black, vandal-resistant and smoke-detector casings available as accessories

- > [360° panoramic overview](#)
- > [Forensic WDR, Lightfinder, day/night functionality](#)
- > [Small and discreet design](#)
- > [Zipstream supporting H.264 and H.265](#)
- > [Environmentally friendly materials](#)

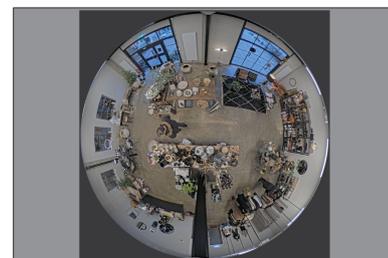

2016 x 2016  
3072 x 2048

# AXIS M3067-P Network Camera

<b>Camera</b>	
<b>Image sensor</b>	6 MP (3072x2048) 1/1.8" progressive scan RGB CMOS
<b>Lens</b>	1.6 mm, F2.0 Horizontal field of view: 185° Vertical field of view: 185° Fixed iris, IR corrected
<b>Day and night</b>	Automatically removable infrared-cut filter
<b>Minimum illumination</b>	Color: 0.18 lux at 50 IRE, F2.0 B/W: 0.04 lux at 50 IRE, F2.0
<b>Shutter speed</b>	1/16000 s to 1s
<b>Camera angle adjustment</b>	Digital roll: 0–360°
<b>System on chip (SoC)</b>	
<b>Model</b>	ARTPEC-7
<b>Memory</b>	1 GB RAM, 512 MB Flash
<b>Video</b>	
<b>Video compression</b>	H.264 (MPEG-4 Part 10/AVC) Baseline, Main and High Profiles H.265 (MPEG-H Part 2/HEVC) Main Profile Motion JPEG
<b>Resolution</b>	Overview: 2016x2016 to 160x160 (1:1) Panorama: 2560x1440 to 192x72 (8:3, 16:9 or 32:9) Double panorama: 2560x1920 to 256x192 (4:3 or 16:9) Quad view: 2560x1920 to 256x192 (4:3 or 16:9) View area 1-4: 1920x1440 to 256x144 (4:3 or 16:9) Corner left/right: 2368x1184 to 192x72 (2:1 or 8:3) Double corner: 2016x2016 to 256x192 (1:1 or 4:3) Corridor: 2560x1920 to 256x144 (4:3 or 16:9)
<b>Frame rate</b>	360° overview only, up to 2016x2016 without WDR: 50/60 fps @ 50/60 Hz 360° overview and 4 dewarped views with WDR: up to 25/30 fps @ 50/60 Hz
<b>Video streaming</b>	Multiple, individually configurable streams in H.264, H.265 and Motion JPEG Axis Zipstream technology in H.264 and H.265 Controllable frame rate and bandwidth VBR/ABR/MBR H.264/H.265
<b>Multi-view streaming</b>	360° overview, dewarped panorama, corridor, corner left/right and quad views. Up to 4 individually cropped out and dewarped view areas. All different views can be streamed simultaneously. When streaming 4 dewarped view areas and one 360° overview in max resolution: up to 19 fps per stream.
<b>Image settings</b>	Compression, color saturation, brightness, sharpness, contrast, local contrast, white balance, day/night threshold, tone mapping, exposure control (including automatic gain control), exposure zones, Forensic WDR: up to 120 dB depending on scene, fine tuning of low-light behavior, dynamic text and image overlay, mirroring, digital roll, polygon privacy masks
<b>Pan/Tilt/Zoom</b>	Digital PTZ of view areas, digital PT of panorama, corner, corridor and quad views, preset positions, guard tour
<b>Audio</b>	
<b>Audio input/output</b>	Two-way audio connectivity via the optional AXIS T61 Audio and I/O Interfaces with portcast technology
<b>Network</b>	
<b>Security</b>	Password protection, IP address filtering, HTTPS <sup>a</sup> encryption, IEEE 802.1X (EAP-TLS) <sup>a</sup> network access control, digest authentication, user access log, centralized certificate management, brute force delay protection, signed firmware, secure boot
<b>Supported protocols</b>	IPv4, IPv6 USGv6, HTTP, HTTP/2, HTTPS <sup>a</sup> , SSL/TLS <sup>a</sup> , QoS Layer 3 DiffServ, FTP, SFTP, CIFS/SMB, SMTP, Bonjour, UPnP <sup>®</sup> , SNMP v1/v2c/v3 (MIB-II), DNS, DynDNS, NTP, RTSP, RTP, SRTP, TCP, UDP, IGMPv1/v2/v3, RTCP, ICMP, DHCPv4/v6, ARP, SOCKS, SSH, LLDP, MQTT v3.1.1, Syslog
<b>System integration</b>	
<b>Application Programming Interface</b>	Open API for software integration, including VAPIX <sup>®</sup> and AXIS Camera Application Platform; specifications at <a href="http://axis.com">axis.com</a> One-Click Cloud Connection

	ONVIF <sup>®</sup> Profile G, ONVIF <sup>®</sup> Profile S, and ONVIF <sup>®</sup> Profile T, specification at <a href="http://onvif.org">onvif.org</a>
<b>Event conditions</b>	Analytics, edge storage events, virtual inputs through API
<b>Event actions</b>	Record video: SD card and network share Upload of images or video clips: FTP, SFTP, HTTP, HTTPS, network share and email Pre- and post-alarm video or image buffering for recording or upload Notification: email, HTTP, HTTPS, TCP and SNMP trap PTZ: PTZ preset, start/stop guard tour Overlay text
<b>Data streaming</b>	Event data
<b>Built-in installation aids</b>	Pixel counter, digital roll, repositioning of quad views, digital PTZ of view areas, digital PT of panorama, corner, corridor and quad views
<b>Analytics</b>	
<b>Applications</b>	<b>Included</b> AXIS Motion Guard, AXIS Fence Guard, and AXIS Loitering Guard, AXIS Video Motion Detection, Active tampering alarm <b>Supported</b> AXIS Occupancy Estimator, AXIS Queue Monitor, AXIS People Counter, AXIS Tailgating Detector, AXIS Direction Detector, AXIS Random Selector Support for AXIS Camera Application Platform enabling installation of third-party applications, see <a href="http://axis.com/acap">axis.com/acap</a>
<b>General</b>	
<b>Casing</b>	Polycarbonate and aluminium casing, encapsulated electronics Color: white NCS S 1002-B For repainting instructions of casing and impact on warranty, contact your Axis partner.
<b>Sustainability</b>	71% recycled plastics, PVC free, BFR/CFR free
<b>Power</b>	Power over Ethernet (PoE) IEEE 802.3af/802.3at Type 1 Class 2 Typical 3.7 W, max 6.49 W
<b>Connectors</b>	Shielded RJ45 10BASE-T/100BASE-TX
<b>Storage</b>	Support for microSD/microSDHC/microSDXC card Support for SD card encryption (AES-XTS-Plain64 256bit) Recording to network-attached storage (NAS) For SD card and NAS recommendations see <a href="http://axis.com">axis.com</a>
<b>Operating conditions</b>	0 °C to 40°C (32 °F to 113 °F) Humidity 10–85% RH (non-condensing)
<b>Storage conditions</b>	-40 °C to 65 °C (-40 °F to 149 °F) Humidity 5–95% RH (non-condensing)
<b>Approvals</b>	<b>EMC</b> EN 55032 Class B, EN 55035, EN 55024, EN 61000-6-1, EN 61000-6-2, FCC Part 15 Subpart B Class A and B, ICES-3(A)/NMB-3(A), VCCI Class B, RCM AS/NZS CISPR 32 Class B, KC KN32 Class B, KC KN35 <b>Safety</b> IEC/EN/UL 62368-1, IS 13252 <b>Environment</b> IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78 <b>Network</b> NIST SP500-267
<b>Dimensions</b>	Height: 49 mm (1.9 in) ø 101 mm (4.0 in)
<b>Weight</b>	300 g (0.66 lb)
<b>Included accessories</b>	Installation guide, Windows <sup>®</sup> decoder 1-user license
<b>Optional accessories</b>	AXIS TM3803 Black Casing AXIS TM3804 Smoke Detector Casing AXIS TM3805 Vandal Casing C (IP42 and IK08) AXIS TM3001 Tilt Mount AXIS TM3101 Pendant Wall Mount AXIS T94B02D Pendant kit AXIS TM3201 Recessed Mount AXIS T94B01P Conduit Back Box AXIS T94B02M J-Box/Gang Box Plate AXIS T91A33 Lighting Track Mount AXIS T91A23 Tile grid Ceiling Mount

	AXIS T61 Audio and I/O Interfaces AXIS Surveillance Cards For more accessories, see <a href="http://axis.com">axis.com</a>
<b>Video management software</b>	AXIS Companion, AXIS Camera Station, video management software from Axis Application Development Partners available at <a href="http://axis.com/vms">axis.com/vms</a>
<b>Languages</b>	English, German, French, Spanish, Italian, Russian, Simplified Chinese, Japanese, Korean, Portuguese, Traditional Chinese
<b>Warranty</b>	5-year warranty, see <a href="http://axis.com/warranty">axis.com/warranty</a>

- a. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. ([openssl.org](http://openssl.org)), and cryptographic software written by Eric Young ([ey@cryptsoft.com](mailto:ey@cryptsoft.com)).

Environmental responsibility:

[axis.com/environmental-responsibility](http://axis.com/environmental-responsibility)