


# AXIS C1210-E Network Ceiling Speaker

Discrete in-ceiling installation—large

AXIS C1210-E is an all-in-one speaker system that makes voice announcements and background music smart and easy. It connects to standard network using one cable for both power (PoE) and connectivity. AXIS C1210-E offers flexible, discrete recessed ceiling installation, ideal for indoor environments but can also be used for protected outdoor areas like under the eaves. Additionally, it features a backbox that meets plenum requirements. It offers easy integration with your video management software (VMS), VoIP telephony, analytics, and more. Including a preconfigured digital signal processor (DSP) it produces clear voice every time. It also features a built-in microphone enabling remote health testing and 2-way audio talk-back. Furthermore, the embedded audio management software supports user, content, zone, and scheduling management.

- > **All-in-one speaker system**
- > **Connects to standard network**
- > **Easy installation with just one network cable (PoE)**
- > **Scalable and easy to integrate**
- > **Remote health testing**

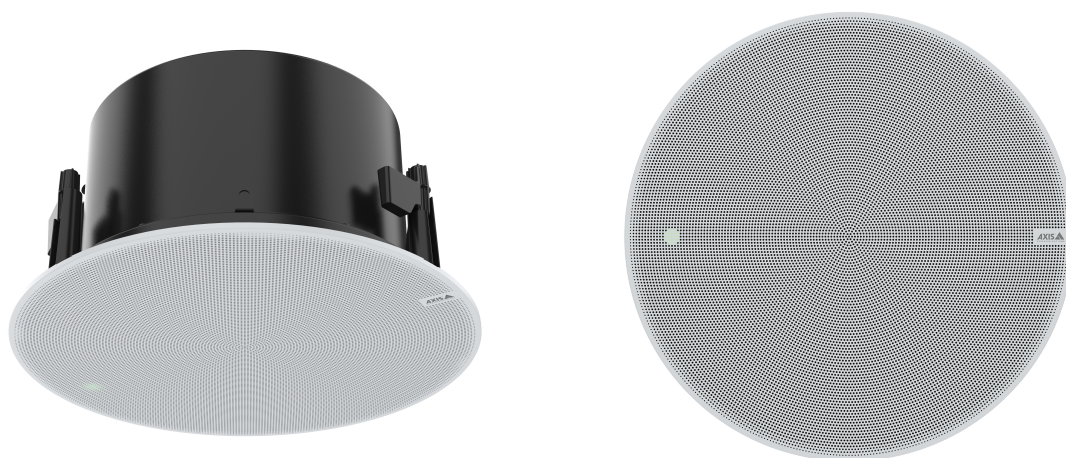

# AXIS C1210-E Network Ceiling Speaker

## Audio hardware

### Enclosure

6.5 inch coaxial dynamic cone speaker in sealed enclosure

### Max sound pressure level

96 dB

### Frequency response

40 Hz – 20 kHz

### Coverage pattern

130° coaxial

### Audio input/output

Built-in microphone (can be disabled)  
External microphone, line in

### Built-in microphone specification

50 Hz – 20 kHz

### Amplifier description

Built-in 7 W Class D amplifier

### Digital signal processing

Built-in and pre-configured

## Audio management

### AXIS Audio Manager Edge

Built in:

- Zone management allowing you to divide up to 200 speakers into 20 zones.
- Content management for music and live/pre-recorded announcements.
- Scheduling to decide when and where to play content.
- Content prioritization to ensure urgent messages interrupt the schedule.
- Health monitoring for remote discovery of system errors.
- User management to control who has access to what features.

For more details, see the datasheet on [axis.com/products/axis-audio-manager-edge/support](https://axis.com/products/axis-audio-manager-edge/support)

### AXIS Audio Manager Pro

For larger and more advanced systems. Sold separately. For specifications, see the datasheet on [axis.com/products/axis-audio-manager-pro/support](https://axis.com/products/axis-audio-manager-pro/support)

### AXIS Audio Manager Center

AXIS Audio Manager Center is a cloud service for remote access and management of multi-site systems. For specifications, see the datasheet on [axis.com/products/axis-audio-manager-center/support](https://axis.com/products/axis-audio-manager-center/support)

## Audio software

### Audio streaming

One-way/two-way with optional full duplex echo cancellation. Mono.

### Audio encoding

AAC LC 8/16/32/48 kHz, G.711 PCM 8 kHz, G.726 ADPCM 8 kHz, Axis  $\mu$ -law 16 kHz, WAV, MP3 in mono/stereo from 64 kbps to 320 kbps.  
Constant and variable bit rate.  
Sampling rate from 8 kHz up to 48 kHz.

## System integration

### Application Programming Interface

Open API for software integration, including VAPIX®, One-click cloud connection, AXIS Camera Application Platform (ACAP).

### Video management systems

Compatible with AXIS Camera Station Edge, AXIS Camera Station Pro, AXIS Camera Station 5, and video management software from Axis' partners available at [axis.com/vms](https://axis.com/vms).

### Mass notification

Singlewire InformaCast®, Intrado Revolution, Lynx, Alertus

### Unified communication

Verified compatibility:

**SIP clients:** 2N, Yealink, Cisco, Linphone, Grandstream  
**PBX/SIP servers:** Cisco Call Manager, Cisco BroadWorks, Avaya, Asterix, Grandstream  
**Cloud service providers:** Webex, Zoom

## SIP

**Supported SIP features:** Secondary SIP server, IPv6, SRTP, SIPS, SIP TLS, DTMF (RFC2976 and RFC2833), NAT (ICE, STUN, TURN)

**RFC 3261:** INVITE, CANCEL, BYE, REGISTER, OPTIONS, INFO

**DTMF (RFC 4733/RFC 2833)**

## Event conditions

Audio: audio clip playing, speaker test result

Call: state, state change

Device status: IP address blocked/removed, new IP address, network lost, system ready, live stream active

Edge storage: recording ongoing, storage disruption, storage health issues detected

I/O: digital input, manual trigger, virtual input

MQTT: stateless

Scheduled and recurring: schedule

## Event actions

Audio: run automatic speaker test

Audio clips: play, stop,

I/O: toggle I/O once, toggle I/O while the rule is active

LEDs: flash status LED, flash status LED while the rule is active

Light and siren: run light profile, run light profile while the rule is active, stop activities

MQTT: publish

Notification: HTTP, HTTPS, TCP and email

Recordings: record audio, record audio while the rule is active

Security: erase configuration

SNMP traps: send, send while the rule is active

## Built-in installation aids

Test tone verification and identification

## Functional monitoring

Auto Speaker Test (verification via built-in microphone)

## Approvals

### EMC

EN 55024, EN 55035, EN 55032 Class A, EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4

**Australia/New Zealand:** CISPR 24, CISPR 35, CISPR 32 Class A, RCM AS/NZS CISPR 32 Class A

**Canada:** ICES-3(A)/NMB-3(A)

**Japan:** VCCI Class A

**Korea:** KC KN35, KC KN32 Class A

**USA:** FCC Part 15 Subpart B Class A

## Safety

CAN/CSA C22.2 No. 62368-1,

CAN/CSA-C22.2 No. 60950-22, IEC/EN 62368-1,

KC-Mark, UL 62368-1, UL 60950-22

## Environment

UL2043 (Plenum rating), IEC 60068-2-1,

IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-14,

IEC 60068-2-27, IEC 60068-2-78, IEC/EN 60529 IP44

## Cybersecurity

ETSI EN 303 645, BSI IT Security Label, FIPS-140

## Network

### Network protocols

IPv4/v6<sup>1</sup>, HTTP, HTTPS<sup>2</sup>, SSL/TLS<sup>2</sup>, QoS Layer 3 DiffServ, FTP, SFTP, CIFS/SMB, SMTP, Bonjour, UPnP™, SNMP v1/v2c/v3 (MIB-II), DNS, DynDNS, NTP, RTSP, RTP, TCP, UDP, IGMPv1/v2/v3, RTCP, ICMP, DHCP, ARP, SOCKS, SSH, NTCIP, SIP

## Cybersecurity

### Edge security

**Software:** Signed OS, brute force delay protection, digest authentication and OAuth 2.0 RFC6749 OpenID Authorization Code Flow for centralized ADFS account management, password protection, Axis Cryptographic Module (FIPS 140-2 level 1), AES-XTS-Plain64 256bit SD card encryption

**Hardware:** Axis Edge Vault cybersecurity platform Secure element (CC EAL 6+), Axis device ID, secure keystore, secure boot

### Network security

IEEE 802.1X (EAP-TLS, PEAP-MSCHAPv2)<sup>2</sup>, IEEE 802.1AR, HTTPS/HSTS<sup>2</sup>, TLS v1.2/v1.3<sup>2</sup>, Network Time Security (NTS), X.509 Certificate PKI, host-based firewall

## Documentation

*AXIS OS Hardening Guide*

*Axis Vulnerability Management Policy*

*Axis Security Development Model*

AXIS OS Software Bill of Material (SBOM)

To download documents, go to [axis.com/support/cybersecurity/resources](https://axis.com/support/cybersecurity/resources)

To read more about Axis cybersecurity support, go to [axis.com/cybersecurity](https://axis.com/cybersecurity)

1. Audio synchronization with IPv4 only.

2. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (openssl.org), and cryptographic software written by Eric Young (eay@cryptsoft.com).

## System on chip (SoC)

### Model

NXP i.MX 6SoloX

### Memory

512 MB RAM, 512 MB Flash

## General

### Casing

IP44 (IP40 above ceiling)

Baffle: plastic

Top cover: plastic

Mesh: surface-treated steel plate

Mesh color: white NCS S 1002-B

Repaintable. For repainting instructions and impact on warranty, contact your Axis partner.

Speaker mounting method: plastic clamp

### Power

Power over Ethernet (PoE), IEEE 802.3af Type 1 Class 3 (max 12.95 W)

### Connectors

RJ45 10BASE-T/100BASE-TX PoE

I/O: 4-pin 2.5 mm terminal block for 2x supervised configurable I/Os

### LED indicators

Status LED, front-facing LED

### Storage

Support for microSD/microSDHC/microSDXC card

Max. size 1 TB

For SD card recommendations see [www.axis.com](http://www.axis.com)

### Reliability

Designed for 24/7 operation.

### Operating conditions

Temperature: -30 °C to 50 °C (-22 °F to 122 °F)

Humidity: 10–100 % RH (condensing)

### Storage conditions

Temperature: -40 °C to 65 °C (-40 °F to 149 °F)

Humidity: 5–95 % RH (non-condensing)

### Dimensions

Height: 150 mm (5.9 in), Front-mesh Ø 285 mm (11.2 in)

Ceiling thickness: for mounting: 0–60 mm (0–2.4 in)

Dimensions for fixing hole: Ø 261 mm ± 2 mm (10.3 in ± 0.08 in)

### Weight

3100 g

### Box content

Speaker, installation guide, Owner Authentication Key, mesh cover, block terminal

### Optional accessories

AXIS TC1603 Tile Bridge (for installation in soft ceiling), AXIS TC1602 Conduit Adapter, AXIS TC1702 Back Cover, AXIS Safety Wire 3M

For more accessories, see [axis.com](http://axis.com)

### Languages

English, German, French, Spanish, Italian, Russian, Simplified Chinese, Japanese, Korean, Portuguese, Polish, Traditional Chinese, Dutch, Czech, Swedish, Finnish, Turkish, Thai, Vietnamese

### Warranty

5-year warranty, see [axis.com/warranty](http://axis.com/warranty)

### Part numbers

Available at [axis.com/products/axis-c1210-e#part-numbers](http://axis.com/products/axis-c1210-e#part-numbers)

## Tools

### Design

AXIS Site Designer

Available at [axis.com](http://axis.com)

### Installation

AXIS Device Manager, product selector, accessory selector

Available at [axis.com](http://axis.com)

## Sustainability

### Substance control

PVC free in accordance with JEDEC/ECA Standard JS709  
RoHS in accordance with EU RoHS Directive 2011/65/EU/ and EN 63000:2018

REACH in accordance with (EC) No 1907/2006. For SCIP UUID, see [axis.com/partner](http://axis.com/partner).



## **Materials**

Renewable carbon-based plastic content: 63%  
(recycled: 0%, bio-based: 63%, carbon capture based: 0%)

Screened for conflict minerals in accordance with OECD guidelines


To read more about sustainability at Axis, go to [axis.com/about-axis/sustainability](https://axis.com/about-axis/sustainability)

---

## **Environmental responsibility**

[axis.com/environmental-responsibility](https://axis.com/environmental-responsibility)

Axis Communications is a signatory of the UN Global Compact, read more at [unglobalcompact.org](https://unglobalcompact.org)

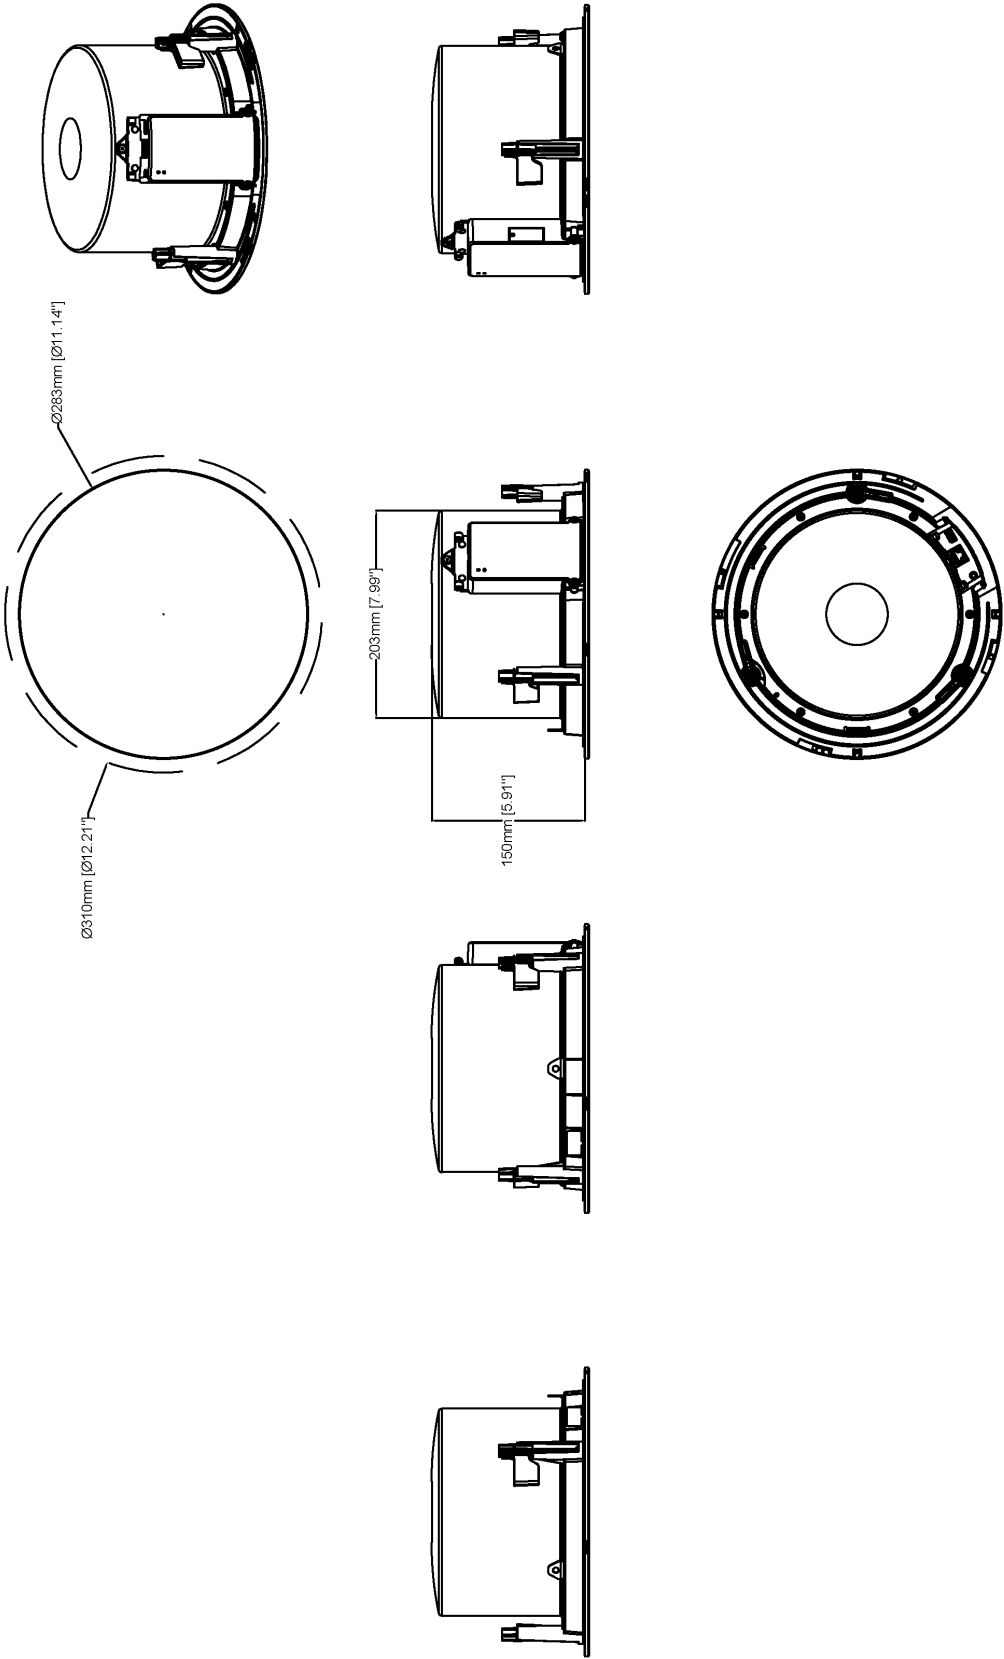

Revision	v.01	Revision date	2022-09-21
Paper size	A4	Release date	2022-09-21
Created by	MS	Scale	1:6

AXIS C1210-E Network Ceiling Speaker



www.axis.com

© 2022 Axis Communications

