

AXIS W400 Body Worn Activation Kit

Automatic activation of body worn cameras

AXIS W400 Body Worn Activation Kit automatically activates recording by all body worn cameras in the same system when a lightbar or siren is activated, or a panic button is pressed. This helps keep police departments in compliance with regulations, for example. It also ensures that there is always footage of escalated events.

- > [Automatic recording activation](#)
- > [Triggered by I/O](#)
- > [Uses Bluetooth[®] beacons](#)



AXIS W400 Body Worn Activation Kit

General

Box content

AXIS D3110 Connectivity Hub, LM842 WiFi 802.11ac / Bluetooth® 5.0 USB Combi Adapter, LM256 RP SMA Dual Band 2.4GHz and 5.8GHz Antenna, AXIS TD3901 Strain Relief

For full specifications, see the AXIS D3110 datasheet at axis.com/products/axis-d3110-connectivity-hub

Operating conditions

-20 °C to 65 °C (-4 °F to 149 °F)

Storage conditions

-40 °C to 65 °C (-40 °F to 149 °F)

Humidity 5–90% RH (non-condensing)

Dimensions

For the product dimensions, see the dimension drawings in this datasheet.

Weight

AXIS D3110 Connectivity Hub:

392 g (0.9 lb)

LM842 WiFi / Bluetooth® Adapter:

6 g (0.01 lb)

LM256 Antenna:

10 g (0.02 lb)

AXIS TD3901 Strain Relief:

35 g (0.08 lb)

Approvals

AXIS D3110 Connectivity Hub:

EMC

CISPR 35, EN 50121-4, EN 50130-4, EN 61000-3-2,

EN 61000-3-3, EN 61000-6-1, EN 61000-6-2,

FCC Part 15 Subpart B Class A, IEC 62236-4,

KC KN32 Class A, KC KN35,

RCM AS/NZS CISPR 32 Class A, VCCI Class A

Safety

CAN/CSA C22.2 No. 62368-1, IEC/EN/UL 62368-1,

UL 2043, UN ECE R118

Environment

IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6,

IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-64,

IEC TR 60721-4-5 Class 5M3,

IEC/EN 61373 Category 1 Class B,

NEMA TS 2 (2.2.7–2.2.9)

Network

NIST SP500-267

Optional accessories

AXIS Surveillance Cards

For more accessories, go to axis.com/products/axis-w400-body-worn-activation-kit#accessories

Wireless interface

Bluetooth profile: None


Warranty

3-year warranty, see axis.com/warranty


Part numbers

Available at axis.com/products/axis-w400-body-worn-activation-kit#part-numbers


Dimension drawings

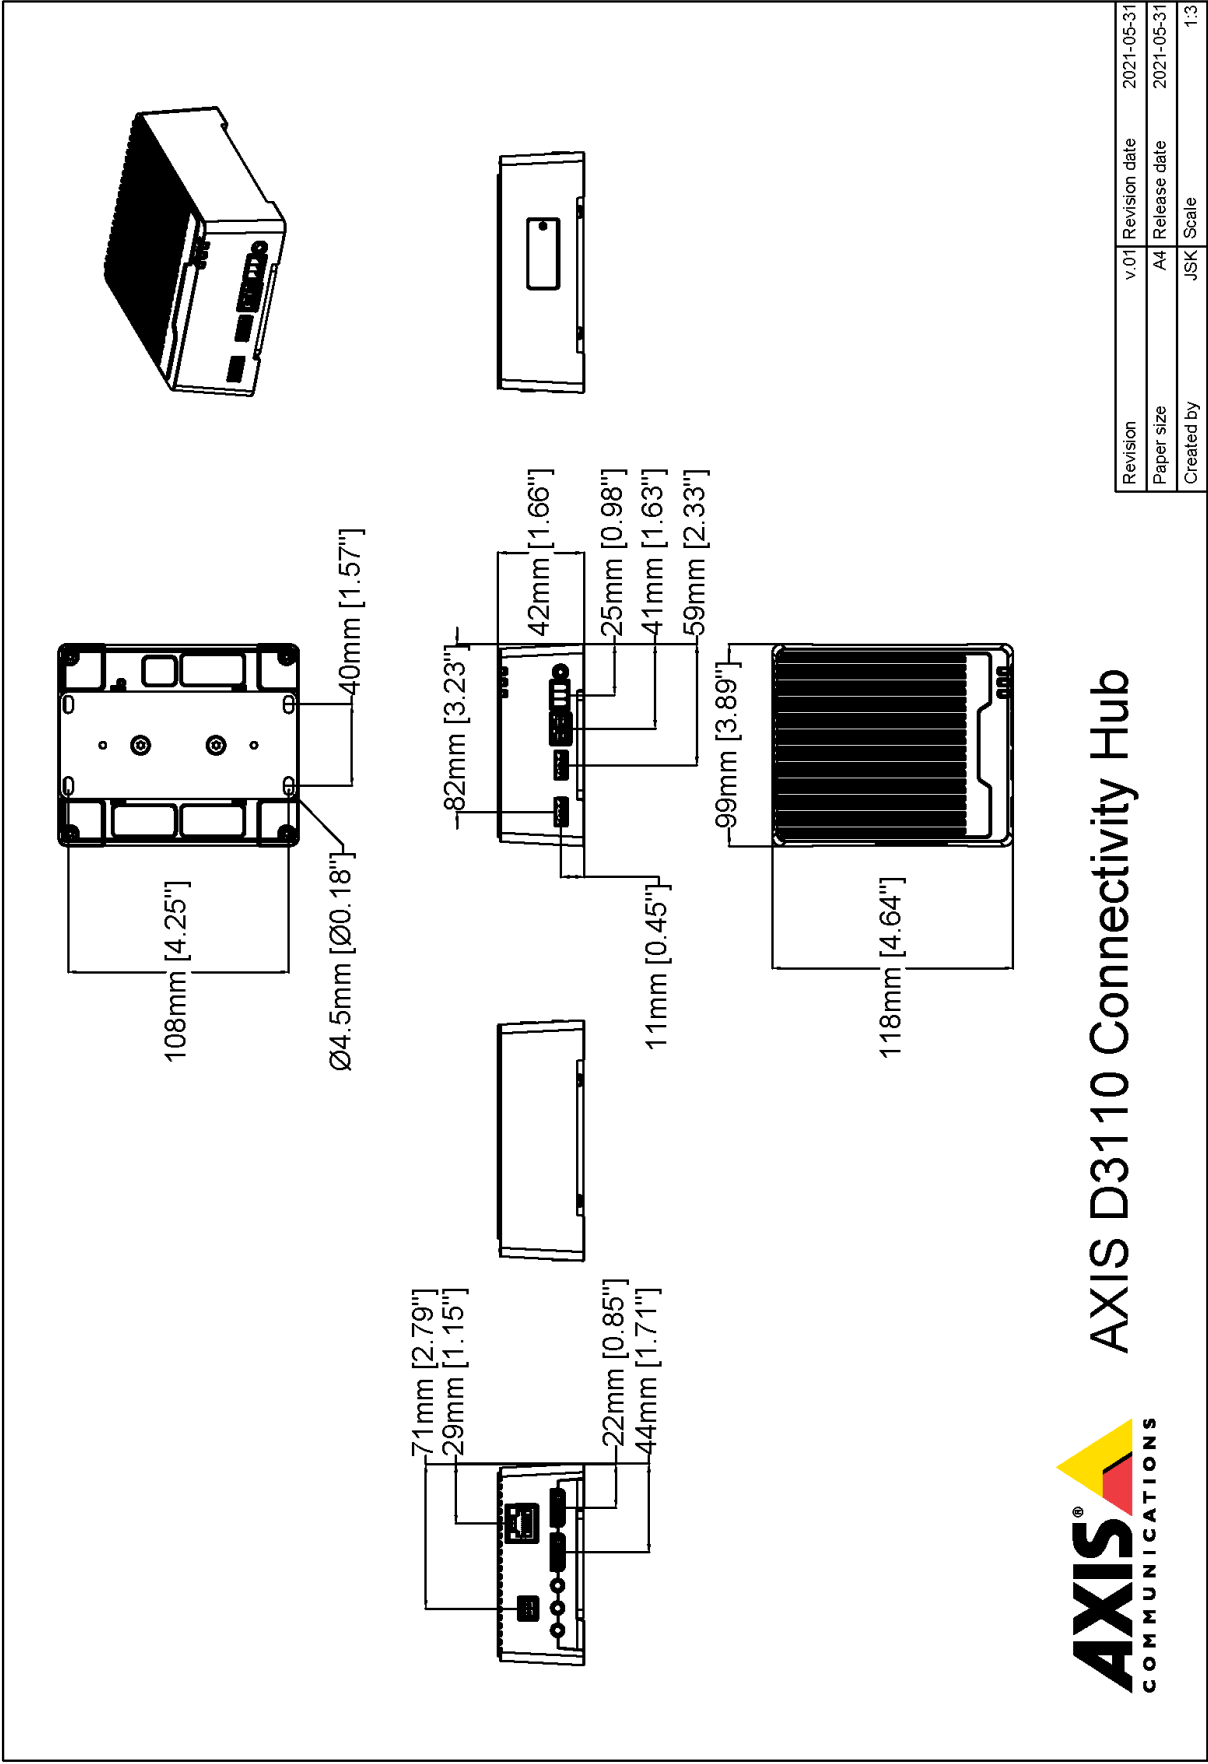

12mm [0.47"]




9mm [0.37"]




Ø6mm [Ø0.25"]

5mm [0.20"]



12mm [0.45"]

20mm [0.80"]

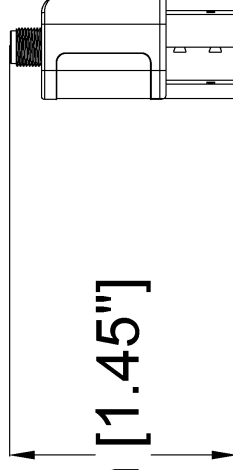

37mm [1.45"]

17mm [0.66"]

Revision	v.01	Revision date	2023-10-19
Paper size	A4	Release date	2023-10-19
Created by	MF	Scale	1:1

