

## AXIS A4131-E Reader with Keypad

### Secure RFID reader with touch keypad

This OSDP reader supports most types of smart RFID card standards with 13.56 MHz, offering secure and seamless entry. It features an intuitive touch keypad with support for two-factor authentication. It's easy to install in single gang boxes or mounted on the wall. It's OSDP Secure Profile verified for strong interoperability with Axis and third-party access control systems that support OSDP. It can also be remotely managed by Axis door controllers, allowing you to access new features, configure the device, and apply security updates from anywhere. An EAL6+ Certified Secure Element offers added protection. Furthermore, transparent mode provides secure end-to-end encryption.

- > [Perfectly matches Axis door controllers and credentials](#)
- > [IP66, IK07 ratings for use in harsh environments](#)
- > [EAL6+ Certified Secure Element and transparent mode](#)
- > [Intuitive touch keypad offers unlimited usage](#)



FIPS 140-3 Inside #5139

# AXIS A4131-E Reader with Keypad

## RFID reader

### Reader technology

13.56 MHz ISO14443-A: MIFARE Classic®, MIFARE Plus®, MIFARE DESFire® EV1, EV2, and EV3

### Network protocols

Open supervised device protocol (OSDP)  
OSDP Secure Profile verified  
Multi-drop

### Alarm status indication

RGB LED for user feedback, buzzer

## Tampering

### Detection type

Built-in tamper switch for detecting both open casing and removal from wall

## Approvals

### EMC

CISPR 32 Class B, EN 61000-6-1, EN 61000-6-3,  
FCC Part 15 Subpart B Class B,  
RCM AS/NZS CISPR 32 Class B

### Safety

CAN/CSA-C22.2 No. 60950-22,  
CAN/CSA C22.2 No. 62368-1, IEC/EN/UL 60950-22,  
IEC/EN/UL 62368-1, UL 294, UL 62368-1, UL 60950-22

### Environment

IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6,  
IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78,  
IEC/EN 60529 IP66, IEC/EN 62262 IK07

### Wireless

EN 62311, EN 300330, EN 301489-1, EN 301489-3,  
FCC Part 15 Subpart C, RSS-102, RSS-210

### Cybersecurity

EN 18031-1

## Cybersecurity

### Edge security

**Software:** Signed device software

**Hardware:** Secure keystore: secure element (CC EAL 6+,  
FIPS 140-3 Level 3)

Secure boot

### Documentation

*Axis Vulnerability Management Policy*

*Axis Security Development Model*

AXIS OS Software Bill of Material (SBOM)

To download documents, go to [axis.com/support/cybersecurity/resources](https://axis.com/support/cybersecurity/resources)

To read more about Axis cybersecurity support, go to [axis.com/cybersecurity](https://axis.com/cybersecurity)

## General

### Keypad

Capacitive touch, 3x4 layout

### Casing

IP66 and IK07-rated plastic casing

Hard-coated scratch- and impact-resistant front

Color: black NCS S 9000-N

### Mounting

Suitable for single-gang box door installations or any flat surface mounting

### Power

**Input:** 12 V DC

**Current consumption:** Typical 90 mA @12 V, max 134 mA @ 12V

13.56 MHz maximum RF transmit power =  
-37.1dBm (ERP)

### Connectors

4-pin terminal block for RS485 (A/B) and power (+/-)

### Cable requirements

**Power:** 18–14 AWG (0.13–2.0809 mm<sup>2</sup>).

Qualified for up to 200 m (656 ft) – 18 AWG

**Reader data:** 1 twisted pair with shield, 22–14 AWG (0.13–2.0809 mm<sup>2</sup>), 120 ohm impedance, for A and B

Qualified for up to 1000 m (3281 ft) – 22 AWG

### Operating conditions

-40 °C to 65 °C (-40 °F to 149 °F)  
Humidity 10–100% RH (condensing)

---

### Storage conditions

-40 °C to 65 °C (-40 °F to 149 °F)  
Humidity 5–95% RH (non-condensing)

---

### Dimensions

121 x 85 x 27 mm (4.76 x 3.35 x 1.06 in)

---

### Weight

258 g (9.10 oz)

---

### Warranty

5-year warranty, see [axis.com/warranty](https://axis.com/warranty)

## Optional accessories

AXIS TA4711 Access Card  
AXIS TA4712 Key Fob  
AXIS TA4201 Weathershield  
AXIS TA4401 Braille Label

## Sustainability

### Substance control

PVC free  
RoHS in accordance with EU RoHS Directive 2011/65/  
EU and 2015/863, and standard EN IEC 63000:2018  
REACH in accordance with (EC) No 1907/2006. For SCIP  
UUID, see [echa.europa.eu](https://echa.europa.eu)

---


### Materials

Screened for conflict minerals in accordance with OECD  
guidelines  
To read more about sustainability at Axis, go to  
[axis.com/about-axis/sustainability](https://axis.com/about-axis/sustainability)

---


### Environmental responsibility

[axis.com/environmental-responsibility](https://axis.com/environmental-responsibility)  
Axis Communications is a signatory of the UN Global  
Compact, read more at [unglobalcompact.org](https://unglobalcompact.org)

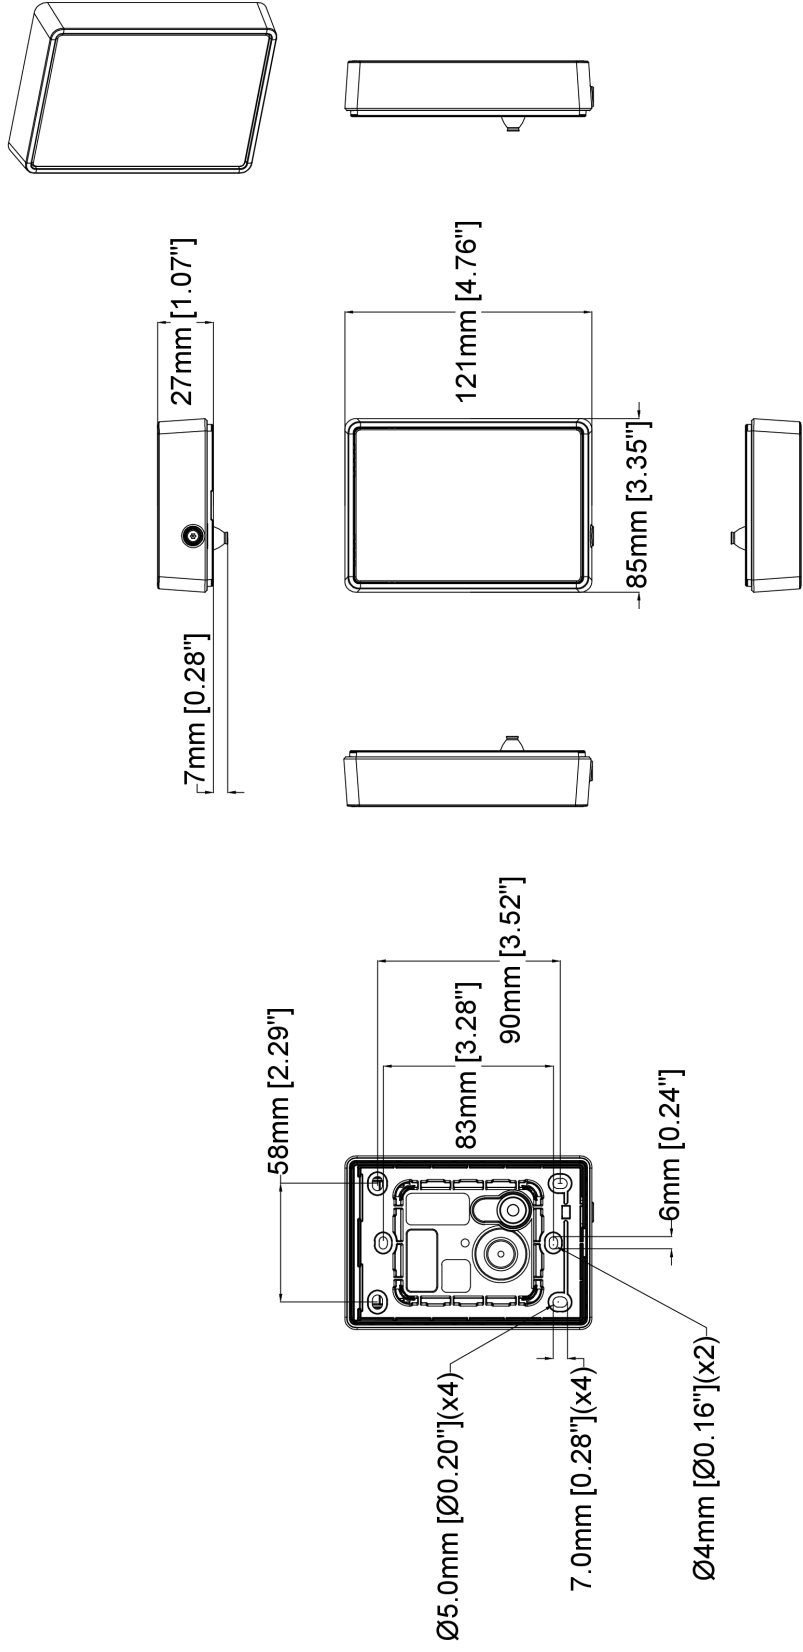

# AXIS A4131-E Reader with Keypad

Revision	v.01	Revision date	2026-02-19
Paper size	A4	Release date	2026-02-19
Created by	MF	Scale	1:3

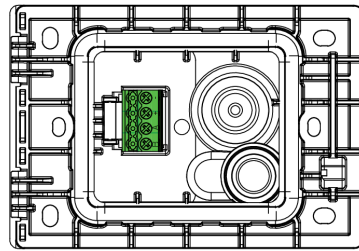

Revision	v.01	Revision date	2026-02-19
Paper size	A4	Release date	2026-02-19
Created by	MF	Scale	1:2

© 2026 Axis Communications

# **AXIS** A4131-E Reader with Keypad

www.axis.com