

AXIS Audio Manager Pro C7110

Software pre-installed on a Windows 11 appliance

The AXIS Audio Manager Pro C7110 server comes with AXIS Audio Manager Pro software for efficient and remote management of large IP audio systems. A single intuitive interface allows you to control audio devices, zones, content, scheduling and user permissions, as well as monitor device health. The system supports live, scheduled, and event-triggered announcements, bell signals and background music, which can be applied to single or multiple zones. The server includes 100 perpetual licenses tied to the hardware and is scalable up to 5,000 devices and backed by a 5-year warranty with next-business-day on-site hardware replacement to ensure maximum uptime.

- > **Up to 5,000 speakers in 500 zones**
- > **Central control**
- > **Zone management**
- > **Advanced scheduling for audio and visual content**
- > **Real-time configuration**



AXIS Audio Manager Pro C7110

Hardware

Processor

Intel® Core™ Ultra 5 Processor 235

Memory

16 GB (2x 8 GB)

Operating system drive

256 GB SSD

Graphics card

Intel® Graphics

Power

Max 180 W, 100–240 V AC, 2.34 A 50/60 Hz,
19,5 V DC, 9,23 A
External AC/DC adapter

Connectors

Front side:

1x Universal audio jack
2x USB 3.2 gen 2x1
1x USB 3.2 gen 2x2 USB-C

Rear side:

1x 1 GbE RJ45
1x USB 3.2 gen 2x1 USB-C
2x USB 3.2 gen 2x1
2x USB 3.2 gen 1x1
3x DisplayPort™
1x Power connector

Approvals

Supply chain

TAA compliant

EMC

CNS 15936, EN 55035, EN 55032 Class B,
EN 61000-3-2, EN 61000-3-3,
FCC Part 15 Subpart B Class B, KS C 9835,
KS C 9832 Class B, RCM AS/NZS CISPR 32 Class B,
VCCI Class B

Safety

BSMI, CAN/CSA C22.2 No. 62368-1 ed.3,
IEC/EN 62368-1, KC-Mark, NOM-019,
RCM AS/NZS 62368.1:2022

Cybersecurity

Edge security

Support for encrypted operating system drive
FIPS 140-2 level 2 certified Trusted Platform Module
(TPM 2.0)
To read more about Axis cybersecurity support, go to
axis.com/cybersecurity

General

Operating system

Microsoft® Windows® 11 IoT Enterprise LTSC 2024
Built-in operating system recovery: yes

Operating conditions

10°C to 35 °C (50°F to 95°F)
Humidity 20–80% RH (non-condensing)

Storage conditions

-40 °C to 65 °C (-40 °F to 149 °F)
Humidity 5–95% RH (non-condensing)

Dimensions

182 x 36 x 178 mm (7.2 x 1.4 x 7.0 in)

Weight

1.2 kg (2.6 lbs)

Included accessories

AC power adapter with wall plug power cord

Optional accessories

For more accessories, see axis.com

Services

Next Business Day onsite support

Warranty

5-year warranty, see axis.com/warranty

Export control

This product is subject to export control regulations,
and you should always comply with all applicable
national and international export or re-export control
regulations.

Sustainability

Substance control

RoHS in accordance with EU RoHS Directive 2011/65/EU, as amended by 2015/863/EU.
REACH in accordance with (EC) No 1907/2006. For SCIP UUID, see echa.europa.eu.

Materials

Post consumer recycled plastics material content used in the product: 54.3%
To read more about sustainability at Axis, go to axis.com/about-axis/sustainability

Environmental responsibility

axis.com/environmental-responsibility
Axis Communications is a signatory of the UN Global Compact, read more at unglobalcompact.org

AXIS Audio Manager Pro

General

Configuration

Up to 5000 audio devices and 500+ zones

Languages

English, French, Spanish, German, Italian, Dutch, Polish, Brazilian Portuguese, Japanese, Korean, Russian, Traditional Chinese, Simplified Chinese, Czech, Swedish, Finnish, Turkish, Thai, Vietnamese, Romanian

Licenses

AXIS Audio Manager Pro 5.0 requires device licenses for network speakers, network audio devices and network paging consoles.

Available license types:

- 1 and 5 year subscription licenses for use with free choice of hardware and virtual machines.
 - Lifetime licenses provided bundled and as expansion licenses that are tied to AXIS NVR recorders if AXIS Audio Manager Pro is installed on the same server.
- A 90-day unlimited trial can be upgraded to a licensed version.

Supported devices

AXIS D6310, AXIS C1710, AXIS C1720, AXIS D4100-VE MK II (strobe only), AXIS D4200, AXIS D3110 Mk II, AXIS C1004-E, C1110-E, C1111-E, AXIS C1210-E, AXIS C1211-E, AXIS C1310-E, AXIS C1310-E Mk II, AXIS C1410, AXIS C1410 Mk II, AXIS C1510, AXIS C1511, C1610-VE, AXIS C2005, AXIS C3003-E, AXIS C8033, AXIS C8110, AXIS C8210, AXIS C8310, AXIS D3110, AXIS Q9227-SLV, 2N SIP Mic

Operating system

Microsoft Windows 10, Windows 10 IoT 2016 LTSB, Windows 11, Windows Server 2016, 2019, 2022, 2025

System requirements

Minimum requirements

Hardware installation: Intel® Core™ i3-7100T

Virtual machine support: VMware ESXi, Microsoft Hyper-V, and Microsoft Windows Datacenter with configuration and resources allocated similar to the minimum hardware requirements.

Audio

Audio sources

Axis network audio products with audio line-in or mic input

Internet radio supported file formats: m3u, m3u8, pls, asx

Two-way communication (SIP)

Streaming

Opus 48 kHz stereo with 64, 192 or 320 kbps

Audio files

Supported audio file formats: mp3, mp4, mpeg, aac, wma, ogg, flac, wav

VoIP

L16 mono, G.722, G.711u, G.711a

Network

Network protocols

IPv4, HTTP, HTTPS, DNS, NTP, RTP, RTSP, TCP, UDP, DHCP, SIP, mDNS, M3U

System integration

Streaming

Support for internet radio by URL.

Dante

Can be connected to Dante using virtual soundcards.








VoIP

Support for Session Initiation Protocol (SIP)
Connectivity to IP-PBX servers via SIP trunk or peer-to-peer

System

Logs

System log, syslog server support

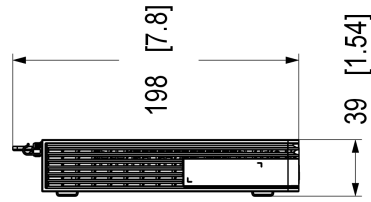

Dimensions in mm [inch]

Date	Version	Scale
2025 Dec-04	M1.2	T3
Drawing Number	Size	Sheet
3478967	A3	1(1)

AXIS CAMERA STATION C7110 Workstation



© 2025 Axis Communications AB. All rights reserved.