


AXIS TI9400 Help Point

Stainless steel enclosure for help point applications

AXIS TI9400 Help Point, a wall mounted emergency housing designed for high visibility, featuring a high intensity LED beacon and an illuminated faceplate. Compatible with AXIS TI8203, AXIS TI8301, and AXIS TI7301 adapter plates, it ensures clear identification in public transit, parking, and campus environments.

- > **High visibility emergency housing**
- > **Optimized for public environments**
- > **Quick, streamlined installation**

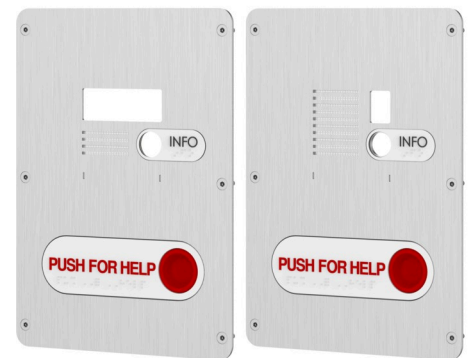

AXIS TI9400 Help Point

Approvals

EMC

FCC Part 15 Subpart B Class A, ICES-3(A)/NMB-3(A)

General

Casing

Stainless steel
Cable entry: Bottom

Power

Power over Ethernet (PoE) :max 9.9 W(AXIS I7010-VE + AXIS TI9400), max 8.2 W(AXIS I8016-LVE + AXIS TI9400)

Operating conditions

Temperature: -40 °C to 60 °C (-40 °F to 140 °F)
Humidity: 10-100% RH (non-condensing)

Storage conditions

Temperature: -40 °C to 65 °C (-40 °F to 149 °F)
Humidity: 5-95% RH (non-condensing)

Dimensions

Height: 763 mm, Width: 303 mm, Depth: 101.6 mm

Weight

11150 g

Languages

English, French

Warranty

3-years warranty, see axis.com/warranty

Optional accessories

AXIS TI7301 Adapter Plate
AXIS TI8301 Adapter Plate

For more accessories, go to axis.com/products/axis-ti9400#compatible-products

Sustainability

Substance control

PVC free, BFR/CFR free in accordance with JEDEC/ECA Standard JS709

Environmental responsibility

axis.com/environmental-responsibility
Axis Communications is a signatory of the UN Global Compact, read more at unglobalcompact.org

Dimension Drawing

