

AXIS TQ1823-VE Dual Mount Cabinet

Robust cabinet for mounting two Axis devices

This indoor/outdoor dual mount cabinet is designed for mounting Axis cameras and other compatible Axis devices. It supports flexible installations, and safely houses and protects, for instance, midspans, 2-port PoE extenders, surge protectors, or media converters, all sold separately*. Robust and vandal-resistant, it comes with an installation wire, anti-loss screws, pre-mounted cable gaskets, and DIN rails for easy installation. Plus, holes in the backplate make it easy to mount vertically on poles or horizontally and vertically on walls. The cabinet door itself can be hung on the left or right side. What's more, AXIS Door Switch A (available separately) helps prevent intrusion. *See dimension drawing for specific measurements.

- > **Robust and vandal-resistant**
- > **Easy to install on walls and poles**
- > **Designed for mounting two Axis devices**
- > **For indoor and outdoor use**
- > **Secure and sleek solution**



AXIS TQ1823-VE Dual Mount Cabinet

Approvals

Environment

IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6,
IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78,
IEC/EN 60529 IP66, IEC/EN 62262 IK10, NEMA 250
Type 4X

General

Supported products

Recommended products for interior mounting:

AXIS Midspans , from 15 W up to 90 W
AXIS TU8003 90 W Connectivity Midspan
AXIS Coax and PoE Extenders
AXIS Media Converters
AXIS Surge Protectors
AXIS C8110 Audio Bridge
AXIS C8210 Audio Amplifier

Recommended products for exterior mounting:

AXIS M43 Cameras
AXIS P13 Cameras
AXIS P14 Cameras
AXIS P32 Cameras
AXIS P34 Cameras
AXIS P38 Cameras
AXIS P47 Cameras
AXIS Q16 Cameras
AXIS Q18 Cameras
AXIS Q19 Cameras
AXIS Q35 Cameras
AXIS Q36 Cameras
AXIS Q38 Cameras
AXIS D2110-VE Security Radar
AXIS D2210-VE Radar
AXIS D41 Strobe Siren Series
AXIS D42 Speakers
AXIS C13 Speakers
AXIS C16 Speakers

For a complete list of compatible products, go to axis.com/products/axis-tq1823-ve-dual-mount-cabinet

Casing

IP66-, NEMA 4X- and IK10-rated
Plastic casing
Color: white NCS S 1002-B

For repainting instructions, go to the product's support page. For information about the impact on warranty, go to axis.com/warranty-implication-when-repainting. This product can be repainted.

Mounting

Back: Cable hole
3/4" (M25) conduit side entries

Operating conditions

Temperature: -40 °C to 65 °C (-40 °F to 149 °F)
Humidity: 10–100% RH (condensing)

Storage conditions

Temperature: -40 °C to 65 °C (-40 °F to 149 °F)
Humidity: 5–95% RH (non-condensing)

Dimensions

For the overall product dimensions, see the dimension drawing in this datasheet.
Effective Projected Area (EPA): 0.137 m² (0.45 ft²)

Weight

4823 g (10.6 lb)

Box content

Mount, installation guide, accessory kit

Languages

English, German, French, Spanish, Italian, Russian, Simplified Chinese, Japanese, Korean, Portuguese, Polish, Traditional Chinese, Dutch, Czech, Swedish, Finnish, Turkish, Thai, Vietnamese

Warranty

3-year warranty, see axis.com/warranty

Part numbers

Available at axis.com/products/axis-tq1823-ve-dual-mount-cabinet

Optional accessories

Mounting

AXIS T91A64 Corner Bracket, AXIS TX30 Steel Straps

Sustainability

Substance control

PVC free, BFR/CFR free in accordance with JEDEC/ECA Standard JS709
RoHS in accordance with EU RoHS Directive 2011/65/EU and 2015/863, and standard EN IEC 63000:2018
REACH in accordance with (EC) No 1907/2006. For SCIP UUID, see echa.europa.eu

Materials

Renewable carbon-based plastic content: 70%
(recycled)






Screened for conflict minerals in accordance with OECD
guidelines

To read more about sustainability at Axis, go to *axis.com/about-axis/sustainability*


Environmental responsibility

axis.com/environmental-responsibility

Axis Communications is a signatory of the UN Global
Compact, read more at *unglobalcompact.org*

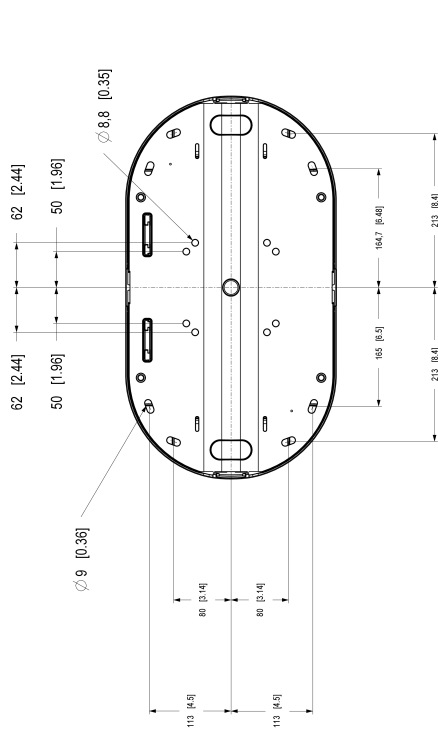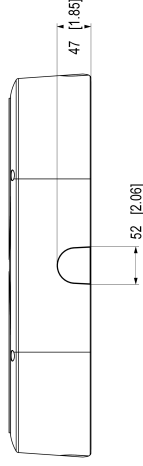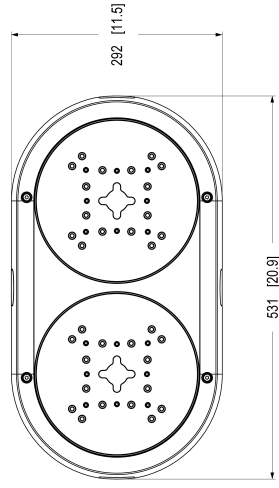

Useable area of compartment.

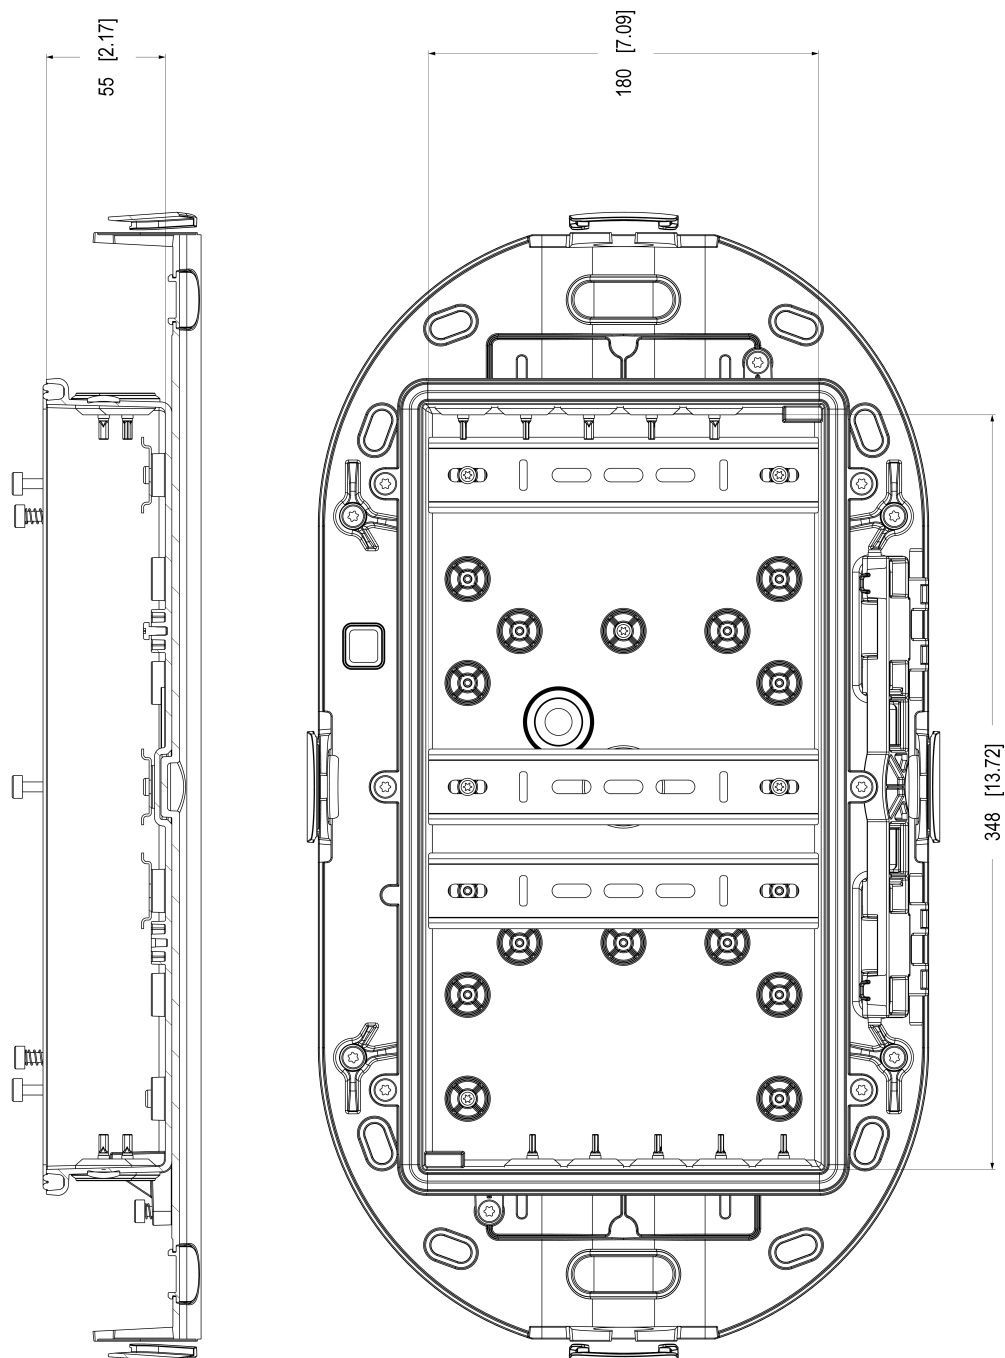

Dimensions in mm [inch]			
2025 Aug 25	M1.5	1:1	
3025042	A1	201	

AXIS TQ1823-VE Dual Mount Cabinet

