AXIS TQ6907-E I/O LED Indicator

Add LED indicators to Axis PTZ cameras

Designed for use with Axis PTZ cameras, this high-durable LED ring can be used to deter, warn, or notify– for example, a green light to signal active recording. Powered and controlled by the camera's I/O ports (if available) or AXIS TU8003 90 W Connectivity Midspan, it offers three customizable RGB color options. These steady lights have a viewable distance up to 100 m (328 ft) in the dark. Designed for outdoor pendant installations on ceilings, walls, or poles, this circular accessory is easy to mount.

- > Circular ring accessory
- > For mounting on Axis PTZ cameras
- > Three customizable steady RGB colors
- > Signal camera-triggered events
- > Sold in packs of four





AXIS TQ6907-E I/O LED Indicator

Light

Illumination LED
Red, green, blue LEDs
Red: >14 lm, green: >55 lm, blue: >10 lm

Approvals

Environment
IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-30, IEC 60068-2-78, IEC/EN 60529 IP66, IEC/EN 62262 IK08

Power

DC input
12 VDC (Powered by device via I/O connector), current required: 50 mA for each color (red, green, or blue)

General

Supported products
Midspan
AXIS TU8003 90 W Connectivity Midspan
Camera
AXIS P5654-E Mk II
AXIS P5655-E
AXIS P5676-LE
AXIS Q6020-E
AXIS Q6086-E
AXIS Q6088-E
AXIS Q6300-E
AXIS Q6325-LE
AXIS Q6355-LE
AXIS Q6358-LE
AXIS Q6411-LE
AXIS Q6411-LE Kit
For a complete list of compatible devices, go to *axis.com/products/axis-tq6907-e-io-led-indicator#compatible-products*

Casing
IP66- and IK08-rated
Plastic casing
Color: white NCS S 1002-B

Mounting
To be mounted between the bracket and camera

Connectors
I/O: 6-pin 2.5 mm terminal block

Operating conditions
Temperature: -35 °C to 55 °C (-31 °F to 131 °F)
Start-up temperature: -35 °C (-31 °F)
Humidity: 0–70% RH (non-condensing)

Storage conditions
Temperature: -35 °C to 70 °C (-31 °F to 158 °F)

Dimensions
For the overall product dimensions, see the dimension drawing in this datasheet.
Effective Projected Area (EPA): 0.0032 m^2 (0.034 ft^2)

Weight
860 g (1.9 lb)

Box content
LED rings, installation guide, screw gaskets

Warranty
3-year warranty, see *axis.com/warranty*

Part numbers
Available at *axis.com/products/axis-tq6907-e-io-led-indicator#part-numbers*

Optional accessories

Mounting
AXIS T91G61 Wall Mount[1], AXIS T91G61 Wall Mount Grey[1], AXIS TQ5301-E Corner Mount

Sustainability

Substance control
PVC free
RoHS in accordance with EU RoHS Directive 2011/65/EU and 2015/863, and standard EN IEC 63000:2018
REACH in accordance with (EC) No 1907/2006. For SCIP UUID, see *echa.europa.eu*


1. *Requires additional accessory*

Materials

Renewable carbon-based plastic content: 71% (bio-based)
To read more about how we calculate the percentage of renewable carbon-based plastic, go to *axis.com/about-axis/sustainability/eco-design*
Screened for conflict minerals in accordance with OECD guidelines
To read more about sustainability at Axis, go to *axis.com/about-axis/sustainability*

Environmental responsibility

axis.com/environmental-responsibility
Axis Communications is a signatory of the UN Global Compact, read more at *unglobalcompact.org*

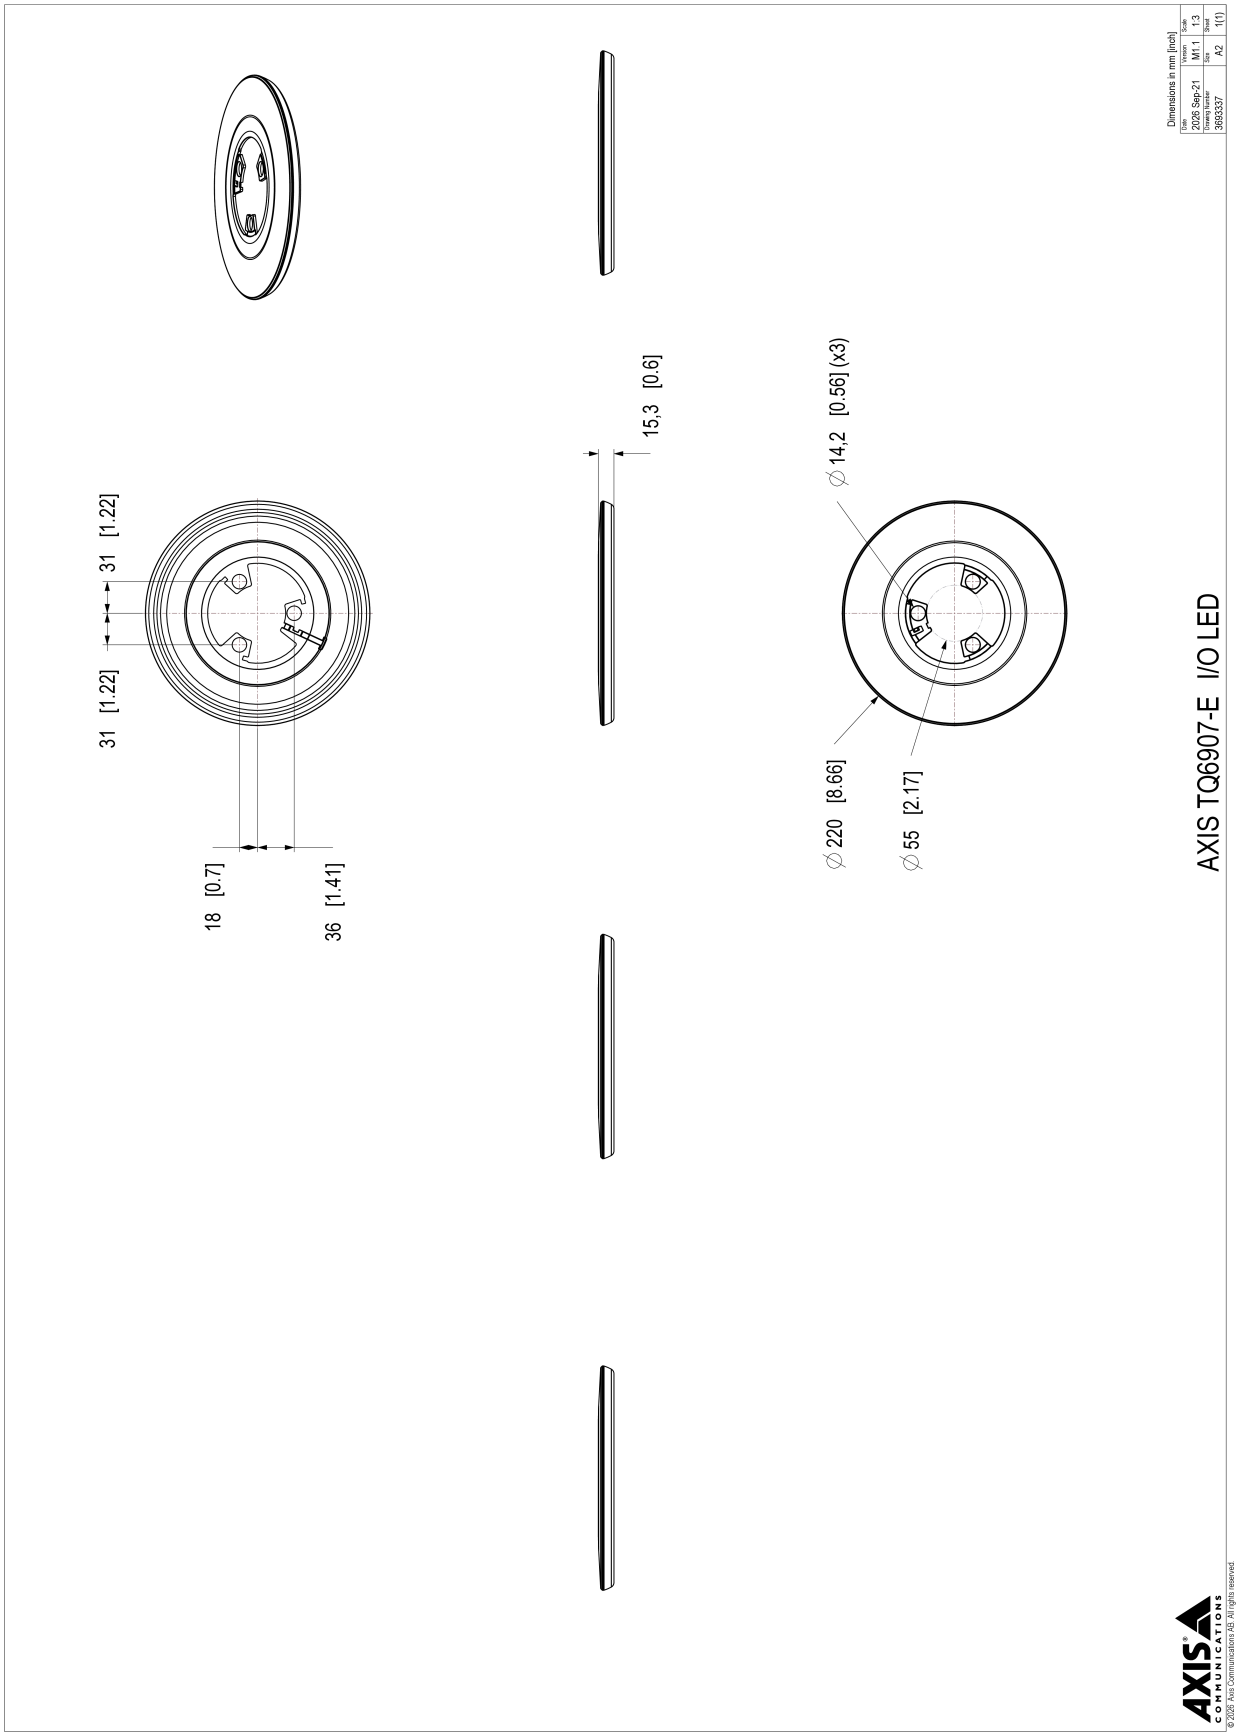

© 2026 Axis Communications AB. AXIS COMMUNICATIONS, AXIS, ARTPEC and VAPIX are registered trademarks of Axis AB in various jurisdictions. All other trademarks are the property of their respective owners. We reserve the right to introduce modifications without notice.