AXIS Companion

Video surveillance made simple.

AXIS Companion

Optimized for businesses needing basic monitoring of their premises, people, and assets.

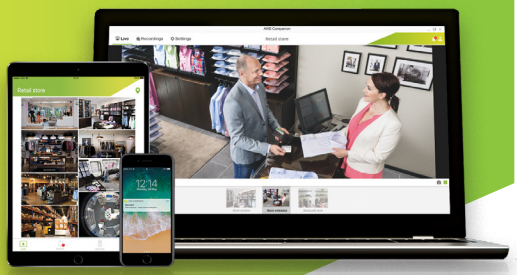

Offers quick and easy system setup and intuitive operation.

- Windows client
- Mobile app for iOS and Android

Download for free from
www.axiscompanion.com/vms

AXIS Companion Cameras

Professional, high-quality IP cameras in different form factors to cover typical surveillance needs.

0959-001	AXIS Companion Bullet LE
01115-001	AXIS Companion Bullet mini LE*
0891-001	AXIS Companion Cube L
0894-001	AXIS Companion Dome V
01665-001	AXIS Companion Dome mini LE* NEW
0881-001	AXIS Companion Eye L
0880-001	AXIS Companion Eye LVE
01064-001	AXIS Companion Eye mini L*
01024-001	AXIS Companion 360

**AXIS Companion Recorder is required and sold separately*

AXIS Companion Recorders

Network video recorders with built in PoE switch and surveillance-grade hard disk allowing for 1 to 2 months of storage.

01035-004	AXIS Companion Recorder 4CH 1TB
0832-004	AXIS Companion Recorder 8CH 2TB
0893-004	AXIS Companion Recorder 8CH 4TB

AXIS® COMMUNICATIONS

AXIS Companion

72996/US/R1/1903

	AXIS Companion **Bullet**	AXIS Companion **Bullet mini**	AXIS Companion **Cube**	AXIS Companion **Dome**	AXIS Companion **Dome mini** NEW	AXIS Companion **Eye**		AXIS Companion **Eye mini**	AXIS Companion **360**
	-LE	-LE	-L	-V	-LE	-L	-LVE	-L	
Max. video resolution (pixels)	1920x1080 (2 MP)	1920x1080 (2 MP)	1920x1080 (2 MP)	1920x1080 (2 MP)	1920x1080 (2 MP)	1920x1080 (2 MP)		1920x1080 (2 MP)	2048 x2048 (6 MP)
Horizontal angle of view	115°	103°	110°	106°	100°	115°		103°	185°
Day and night	Yes	Yes	Yes	No	Yes	Yes		Yes	No
Min. illumination (lux)	0.2 (Color) 0.04 (B/W) 0 with IR on	0 with IR on	0.25 (Color) 0.05 (B/W) 0 with IR on	0.25	0 with IR on	0.2 (Color) 0.04 (B/W) 0 with IR on		0 with IR on	0.3
Power	PoE IEEE 802.3af/ 802.3at Class 2	PoE IEEE 802.3af/ 802.3at Class 1	PoE IEEE 802.3af/ 802.3at Class 2	PoE IEEE 802.3af/ 802.3at Class 1	PoE IEEE 802.3af/ 802.3at Class 1	PoE IEEE 802.3af/ 802.3at Class 2		PoE IEEE 802.3af/ 802.3at Class 1	PoE IEEE 802.3af/ 802.3at Class 2
Outdoor ready	Yes IP66-, NEMA 250 Type 4X and IK08-rated	Yes IP66-rated, water and dust resistant	No	No IP42-rated, water and dust resistant, IK08-rated	Yes IP66-rated, water and dust resistant	No IP42-rated, water and dust resistant	Yes IP66-, NEMA 250 Type 4X and IK08-rated	No	No
Other	IR illumination, Zipstream, Memory card slot, WDR, Corridor format	IR illumination, WDR, Corridor format, Bandwidth and storage optimized	IR illumination, Built-in PIR sensor, Built-in microphone, Built-in speaker, Zipstream, Memory card slot, WDR, Corridor format	HDMI output (micro), Zipstream, Memory card slot, WDR, Corridor format	IR illumination, WDR, Corridor format, Bandwidth and storage optimized	IR illumination, Zipstream, Memory card slot, WDR, Corridor format		IR illumination, WDR, Corridor format, Bandwidth and storage optimized	360 Panoramic camera, HDMI output, Zipstream, Memory card slot, WDR, Corridor format
AXIS Companion Recorder required	Optional	Yes	Optional	Optional	Yes	Optional	Optional	Yes	Optional
Part number	**0959-001**	**01115-001**	**0891-001**	**0894-001**	**01665-001**	**0881-001**	**0880-001**	**01064-001**	**01024-001**

www.axiscompanion.com

AXIS COMMUNICATIONS