

AXIS 262 Network Video Recorder

Complete network recording solution


Prevent shoplifting, reduce false alarms, increase personnel safety or view your premises remotely – by using a comprehensive Axis surveillance solution.

The AXIS 262 Network Video Recorder is a complete recording solution which is easy to use and install. It is ideal for storing video with up to megapixel resolution with no quality degradation; it will always give you the same image quality as the original image from the camera or video server. The 160 GB hard disk allows you to store e.g. 10 days of VGA resolution at one frame per second, eight channels. View, record and playback video from up to eight Axis network cameras simultaneously, via remote access. Scheduled and triggered recordings can be performed at a recording speed of up to 240 frames per second.

Connecting directly to your network, the open application protocol interface (API) and sophisticated networking functions based on open industry standards greatly simplify systems integration. Together with Axis network cameras and video servers, the AXIS 262 Network Video Recorder offers the complete surveillance solution.




- Records from up to eight network cameras up to megapixel resolution
- Simultaneous recording, live viewing and playback of recorded video
- Easy to install, use and manage
- Records up to 100 frames per second at VGA or 4CIF
- Remote access to recorded material as well as to live cameras
- 160 GB hard disk with Anti-Vibration

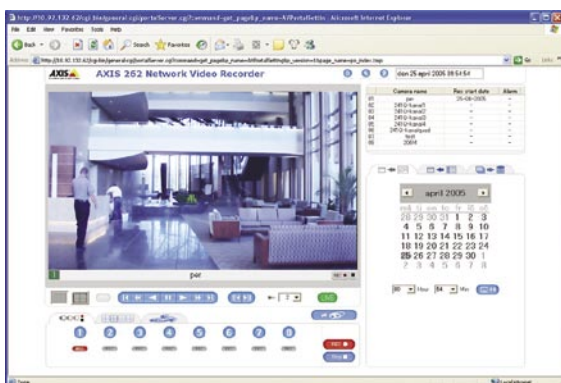

AXIS 262 Network Video Recorder

24873JEN/R2/0505

Specifications	
Video recording	Motion JPEG
Compatibility	Compatible with all Axis network video products running with firmware 4.15 and higher
Recording frame rate	Up to 240 frames per second in QVGA or CIF Up to 100 frames per second in VGA or 4CIF
Recording storage	160 GB hard disk drive with Anti-Vibration
Video channels	8 video channels
Resolution	Up to and exceeding 1280x1024 (always the same as camera's resolution, with no degradation)
Camera live view	All cameras can be monitored through AXIS 262
Live sequence mode	Several configuration options for how the AXIS 262 will sequence through the video sources
Audio Support	Full duplex live audio support through direct connection to audio enabled cameras and servers. No audio recording
PTZ support	Control of all Axis PTZ and dome cameras through direct connection to camera
Alarm recording	Recordings can be started by HTTP notification from a network camera/video server or by a trigger from a digital input on the AXIS 262
Alarm recording frame rate	The frame rate for alarm recordings can be specified independently from the frame rate of scheduled recordings
Scheduled recording	Recordings can be scheduled for the various video sources with different frame rates
Manual recording	Capability to manually start a recording with predefined frame rate
Playback	Playback of recorded material, fast forward, fast reverse, single step forward and reverse
Synchronized playback	Playback of video synchronized in time from up to 4 video sources simultaneously
Search for recordings	Search for recordings based on date and time
Video clip export	Part of a recording can be downloaded to a remote computer
Time synchronization	Date and time in the cameras and video servers are synchronized with the date and time in the AXIS 262. The date and time in the AXIS 262 can be synchronized with an external NTP server
Daylight saving time	Different time zones are supported
System alarm notification	Output 1: Alarm recording status Output 2: Channel lost status Output 3: Hard disk error Output 4: Hard disk full Alarm notification via email if failure on hard disk or system
Security	Multiple user access levels with password protection
Connectors	Ethernet 10BaseT/100BaseTX, RJ-45 Terminal block: 4 alarm inputs, 4 outputs D-Sub for RS-232 port for UPS (Uninterruptible Power Supply)
Processors and memory	CPU: VIA C3 RAM: 256 MB Flash: 128 MB
Power	12 V DC, max 50 W (typically 40 W)
Operating conditions	5 - 40 °C (41 - 104 °F), humidity 20 - 80% RH (non condensing)
Language support	English, German and Japanese (automatic selection)
Installation, management and maintenance	Installation tool on a CD and Web-based configuration Support for firmware upgrades over HTTP; firmware available at www.axis.com
Video access from Web browser	Full control through the Web browser
Minimum Web browsing requirements	Pentium 4 CPU 2 GHz or higher, or equivalent AMD 512 MB RAM AGP graphic card, Direct Draw, 32 MB RAM Windows XP Pro, DirectX 9.0 or later, Internet Explorer 6.x or later
System integration support	Powerful API for software integration is available at www.axis.com including HTTP API Embedded operating system: Linux 2.4 The AXIS 262 can be configured to send a TCP notification when an alarm recording starts and stops
Supported protocols	HTTP, TCP, SMTP, DHCP, ARP, DNS, NTP. More information on protocol usage available at www.axis.com
Included Accessories	Power supply 12 V DC Power cords for Germany, UK and Japan Installation Guide CD with installation tool and User's Manual
Approvals	EMC: EN55022: 1998 Class B, EN61000-3-2, EN61000-3-3, EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-11, EN 55024:1998, VCCI Safety: EN60950
Dimensions (HxWxD) and weight	70 x 310 x 290 mm (2 ³ / ₄ " x 12 ³ / ₁₆ " x 11 ⁷ / ₁₆ " 5 kg (11 lbs) excl. power supply

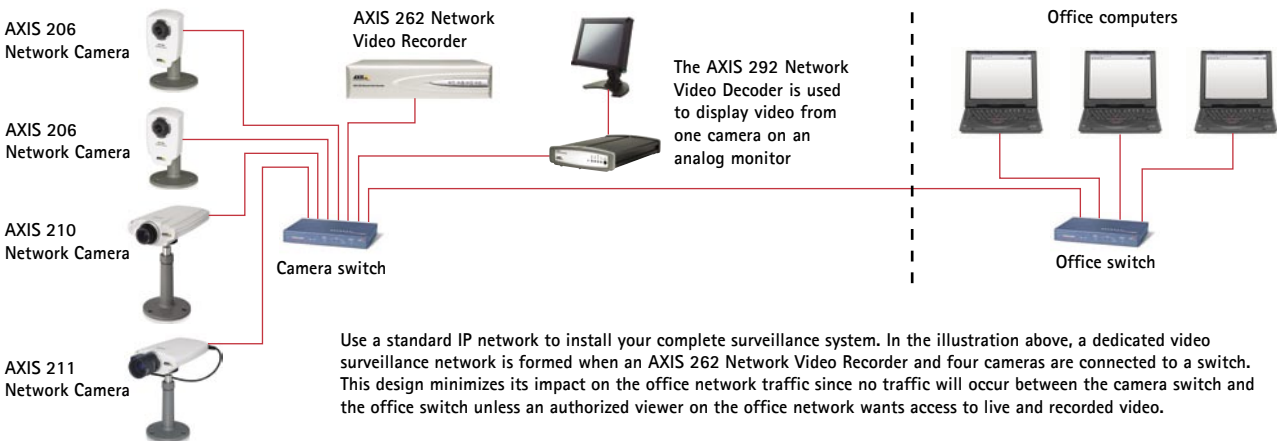

www.axis.com

AXIS[®]
COMMUNICATIONS
Make your network smarter