


AXIS ACH13HB Outdoor Housing

Weatherproof your Axis Network Cameras

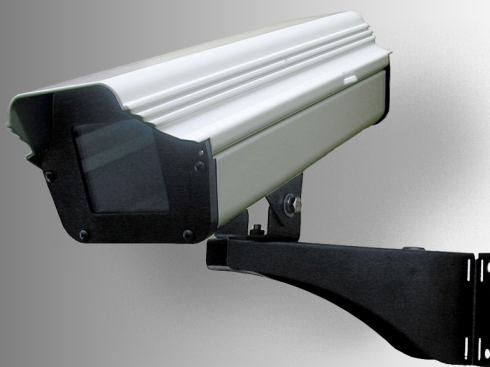

- > Indoor and outdoor models
- > IP65-rated
- > 24 V AC heater and blower
- > Side hinge for easy access when servicing

The AXIS ACH13HB Outdoor Housing provides protection for Axis network cameras in both hot and cold climates. The housing was designed to meet IP65 standard of protection.

The body is constructed of an attractive white finished aluminum with black end caps.

The housing ships with a 24 V AC heater and blower that enables the Axis network camera to operate in temperatures from -20° F to 120° F.

Technical Specifications – AXIS ACH13HB Outdoor Housing

Models	AXIS ACH13HB Outdoor Housing	Approvals	CE, IEC/EN 60529 IP65, UL Listed
Camera		Dimensions	Product dimensions: 15.25 x 4.33 x 5.5 in Shipping dimension: 17 x 5 x 6 in
Supported cameras	AXIS P13 Series AXIS Q1755	Weight	Product weight: 4 lb Shipping weight: 5 lb
General		Included accessories	Installation Guide Indoor model shipped with no electronics (no heater, blower, 24 V AC power supply or sunshield) Outdoor model includes: 24 V AC Power Supply, Sunshield, Heater and Blower
Casing	Aluminum, Color: White finish with black end caps, Two watertight strain relief valves for network and power cables	Warranty	Axis 3-year warranty, see www.axis.com/warranty
Power	24 V AC, 50/60 Hz Heater: 24 V AC, 25 VA, 1.04 Amps Blower: 24 V AC, input (RECTIFIED), 1.4 VA 24 V AC to 12 V DC transformer, 1.0 Amp 24 V AC, 40 VA Power Supply		
Operating conditions	-20 °F to 120 °F		

More information is available at www.axis.com