

AXIS Q6042 PTZ Dome Network Camera

Indoor, high-speed PTZ dome with 36x zoom



- > 36x optical zoom and Extended D1
- > IP52-rated protection against dust and dripping water
- > Shock detection
- > Enhanced intelligent video
- > PoE+

AXIS Q6042 is an advanced indoor PTZ dome, offering higher resolution than normal D1, 36x optical zoom, and fast and precise pan/tilt performance for wide area coverage and great detail when zooming in. It is ideal for airports, train stations, arenas, shopping malls and warehouses.

Supporting round-the-clock pan/tilt/zoom operation, the robust AXIS Q6042 can be automatically directed to 256 preset positions using guard tour. With endless 360° pan and high zoom, the camera can monitor an extremely wide area and provide detailed surveillance. The camera's adjustable day/night functionality ensures high image quality even in low light conditions.

AXIS Q6042 has IP52-rated protection against dust and dripping water, and support for Power over Ethernet Plus (IEEE 802.3at) using the supplied High PoE midspan. The PTZ dome also has shock detection, which mechanically detects and triggers an alarm if the camera has been hit. In vibrating conditions, the camera's electronic image

stabilization reduces the effects of camera vibrations on the view to deliver clearer video.

AXIS Q6042's built-in video analytics include Active Gatekeeper, which enables the camera to automatically move to a preset position when motion is detected in a pre-defined area, and track the detected object. The camera also has substantial capacity for third-party intelligent video applications.

With an optional multi-connector cable, AXIS Q6042 supports two-way audio, I/O ports for external devices and AC/DC power. The camera has a built-in memory card slot for local storage of recordings.




Technical Specifications - AXIS Q6042 PTZ Dome Network Camera

Models	AXIS Q6042 50 Hz, AXIS Q6042 60 Hz	Analytics	Video motion detection, Autotracking, Active Gatekeeper, AXIS Camera Application Platform enabling installation of additional applications
Camera		Event triggers	Video motion detection, Audio detection, Shock detection, Fan, External input, Manual trigger, Autotracking, PTZ moving, PTZ preset, Edge storage events, AXIS Camera Application Platform
Image sensor	1/4" ExView HAD progressive scan CCD	Event actions	File upload: FTP, HTTP, network share and email Notification: email, HTTP and TCP External output, PTZ preset, Guard tour, Play audio clip, Video and audio recording to edge storage, Autotracking, Day/night mode, Pre- and post-alarm video buffering
Lens	f=3.3 – 119 mm, F1.4 – 4.2, autofocus Horizontal angle of view: 57.2° - 1.7°	Built-in installation aids	Pixel counter
Day and night	Automatically removable infrared-cut filter	General	
Minimum illumination	Color: 0.5 lux at 30 IRE F1.4 B/W: 0.008 lux at 30 IRE F1.4	Casing	IP52-rated metal casing (aluminum), acrylic (PMMA) clear dome
Shutter time	1/30000 s to 1.5 s (50 Hz), 1/30000 s to 0.5 s (60 Hz)	Memory	512 MB RAM, 128 MB Flash
Pan/Tilt/Zoom	Pan: 360° endless, 0.05° – 450°/s Tilt: 180°, 0.05° – 450°/s 36x optical zoom and 12x digital zoom, total 432x zoom E-flip, 256 presets, Tour recording, Guard tour, Control queue, On-screen directional indicator	Power	Power over Ethernet Plus (PoE+) IEEE 802.3at, max. 30 W AXIS T8123 High PoE midspan 1-port: 100-240 V AC, max. 37 W 24-34 V DC, max. 19 W; 20-24 V AC, max. 27 VA
Video		Connectors	RJ45 for 10BASE-T/100BASE-TX PoE Multi-connector (cable sold separately) for AC/DC power, 4 configurable alarm inputs/outputs, mic in, line mono input, line mono output to active speaker
Video compression	H.264 Main and Baseline Profiles (MPEG-4 Part 10/AVC) Motion JPEG	Storage	SD/SDHC/SDXC slot supporting memory card up to 64 GB (card not included); support for recording to dedicated network-attached storage (NAS)
Resolution	Extended D1 736x576 to 176x144 (50 Hz) Extended D1 752x480 to 176x120 (60 Hz)	Operating conditions	0 °C to 50 °C (32 °F to 122 °F) Humidity 10–85% RH (non-condensing)
Frame rate	H.264: Up to 25/30 fps (50/60 Hz) in all resolutions Motion JPEG: Up to 25/30 fps (50/60 Hz) in all resolutions	Storage conditions	-40 °C to 65 °C (-40 °F to 149 °F)
Video streaming	Multiple, individually configurable streams in H.264 and Motion JPEG Controllable frame rate and bandwidth; VBR/CBR H.264	Approvals	EN 55022 Class A, EN 61000-3-2, EN 61000-3-3, EN 61000-6-1, EN 61000-6-2, EN 55024, FCC Part 15 Subpart B Class A, ICES-003 Class A, VCCI Class A, C-tick AS/NZS CISPR 22 Class A, KCC KN22 Class A, KN24, IEC/EN/UL 60950-1, IEC/EN 60529 IP52, IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78 Midspan: EN 60950-1, GS, UL, cUL, CE, VCCI, CB, KCC, UL-AR
Image settings	Wide dynamic range (WDR), Electronic image stabilization, Manual shutter time, Compression, Color, Brightness, Sharpness, White balance, Exposure control, Exposure zones, Backlight compensation, Fine tuning of behavior at low light, Rotation, Text and image overlay, 32 individual 3D privacy masks, Image freeze on PTZ	Weight	Camera: 2.6 kg (5.7 lb.); with drop-ceiling mount: 3.2 kg (7.1 lb.)
Audio		Included accessories	AXIS T8123 High PoE Midspan 1-port, Mounting kit for hard and drop ceilings, Smoked dome cover, Installation Guide, Installation and Management Software CD, Windows decoder 1-user license
Audio streaming	Two-way	Video management software	AXIS Camera Companion (included), AXIS Camera Station and video management software from Axis' Application Development Partners (not included)
Audio compression	AAC-LC 8/16 kHz, G.711 PCM 8 kHz, G.726 ADPCM 8 kHz Configurable bit rate	Warranty	Axis 3-year warranty and AXIS Extended Warranty option, see www.axis.com/warranty
Audio input/output	Requires multi-connector cable (sold separately) for external microphone or line input, and line output	a. <i>This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (www.openssl.org), and cryptographic software written by Eric Young (eay@cryptsoft.com).</i>	
Network		Environmental responsibility: axis.com/environmental-responsibility	
Security	Password protection, IP address filtering, HTTPS ^a encryption, IEEE 802.1X ^a network access control, Digest authentication, User access log		
Supported protocols	IPv4/v6, HTTP, HTTPS ^a , SSL/TLS ^a , QoS Layer 3 DiffServ, FTP, CIFS/SMB, SMTP, Bonjour, UPnP TM , SNMPv1/v2c/v3 (MIB-II), DNS, DynDNS, NTP, RTSP, RTP, TCP, UDP, IGMP, RTCP, ICMP, DHCP, ARP, SOCKS		
System integration			
Application Programming Interface	Open API for software integration, including VAPIX [®] and AXIS Camera Application Platform; specifications at www.axis.com AXIS Video Hosting System (AVHS) with One-Click Camera Connection ONVIF Profile S; specifications at www.onvif.org		

Dimensions

1. Hard-ceiling mount
2. Drop-ceiling mount

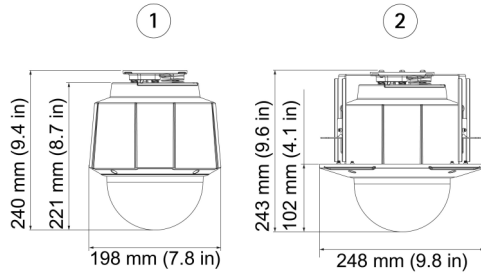

Optional accessories

1. Axis mounting accessories
2. AXIS T90A Illuminators
3. Multi-connector cable for AC/DC power, I/Os and audio
4. AXIS T8310 Video Surveillance Control Board

