


AXIS T8353A

High-performance all-round microphone

The microphone is an omnidirectional condenser microphone and therefore do not need to be aimed directly at the sound source. The design allows for discreet installation, and the microphone can be used for covert audio detection or as a complement to indoor video surveillance. AXIS T8353A with a 3.5 mm adaptor is compatible with Axis M-, P and Q-line network video products supporting a 3.5 mm jack for microphone input.

- > Professional audio surveillance
- > Outstanding dynamic range and low noise
- > Omnidirectional
- > Discreet and compact microphones

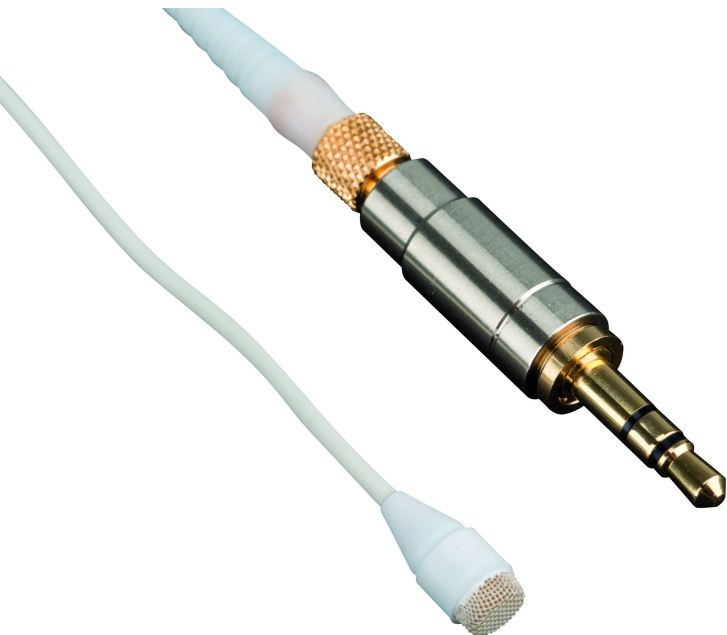

AXIS T8353A

Audio		Safety
Supported devices	All Axis M-, P- and Q-line network video products supporting a 3.5 mm jack for microphone input	IEC/EN/UL 60950-1, CE
Frequency range	Within 20 Hz - 20 kHz (see graph) ^a	Environment IEC/EN 60529, EN 50581
Sensitivity	-44 dB	Dimensions
Max SPL	138 dB (10% THD)	Microphone (LxØ): 5.4 x 12.7 mm (0.2 x 0.5 in) Cable (LxØ): 1.8 m x 1.6 mm (71 x 0.06 in) 3.5 mm plug (Ø): 7.9 mm (0.3 in)
SNR	68 dB A-weighted (relative 1 kHz @ 1 Pa, 94 dB SPL)	Weight
Directionality	Omnidirectional	14 g (0.03 lb)
General		Optional accessories
Casing	Plastic casing Color: NCS S 9002-B	AXIS Audio Extension Cable A, 5m AXIS T8353 Mount For more accessories, see axis.com
Power	12-48 V DC ^b	Languages
Connectors	3.5 mm phono plug	English, German, French, Spanish, Italian, Russian, Simplified Chinese, Japanese, Korean, Portuguese, Traditional Chinese
Operating conditions	-25 °C to 45°C (-13 °F to 113 °F) Humidity 0-90% RH (non-condensing)	Warranty
Storage conditions	-25 °C to 70 °C (-13 °F to 158 °F)	Axis 3-year warranty and AXIS Extended Warranty option, see axis.com/warranty
Approvals	EMC EN 55103-1, EN 55103-2	

a. The audio specifications were produced with the microphone mounted as specified
b. Power is provided by the Axis network product

Environmental responsibility:

www.axis.com/environmental-responsibility

