

## YP3040 Pan-Tilt Motor

### Operator-controlled field of view adjustment



- > Pan-tilt functionality for fixed cameras
- > Operator controlled movement
- > IP66-rated protection
- > For column and wall mounting
- > Easy installation

YP3040 Pan-Tilt Motor is an optional accessory for Axis fixed network cameras with pan-tilt support. It is ideal for use where a cost effective solution for fine adjustments to a camera's field of view is needed.

YP3040 Pan-Tilt Motor adds pan-tilt functionality to Axis fixed network cameras with pan-tilt support. The camera is connected directly to the Pan-Tilt Motor and can be panned and tilted easily by an operator.

YP3040 Pan-Tilt Motor can be used both indoors and outdoors. It is IP66-rated and recommended for use with AXIS T92A20, AXIS T92E05 and AXIS T92E20 Housings. The Pan-Tilt Motor is recommended for column mount-

ing and can also be installed on a wall with an optional YP3040 Wall Bracket. The recommended power supply is AXIS PS-24 Mains Adaptor.

YP3040 Pan-Tilt Motor is easy to install. It is pre-configured for use with AXIS Q1755-E and AXIS Q1765-LE PT Mount Network Cameras, AXIS Q1910-E or AXIS Q1931-E PT Mount and AXIS Q1932-E PT Mount Thermal Network Cameras.




# Technical Specifications - YP3040 Pan-Tilt Motor

<b>Models</b>	YP3040 Pan-Tilt Motor	<b>Power</b>	Consumption: 30 W Input: 24 V AC 50/60 Hz AXIS PS-24 Mains Adaptor recommended (not included)
<b>General</b>		<b>Operating conditions</b>	-20 °C to 65 °C (-4 °F to 149 °F)
<b>Supported cameras</b>	AXIS P13-E, AXIS Q16-E, AXIS Q1755-E and AXIS Q1765-LE PT Mount Network Cameras, AXIS Q1910-E, AXIS Q1922-E, AXIS Q1931-E PT Mount and AXIS Q1932-E PT Mount Thermal Network Cameras, AXIS T92A and AXIS T92E Housings	<b>Approvals</b>	IEC/EN 60529 IP66
<b>Pan/Tilt/Zoom</b>	Pan range 0° to 355° Tilt range 10° to -80° Pan speed 7.5°/s Tilt speed 6°/s Designed for operator control	<b>Dimensions</b>	288 x 165 x 188.5 mm (11 x 6 x 7 in)
<b>Casing</b>	Aluminum alloy Color: White NCS S 1002-B	<b>Weight</b>	4.2 kg (9 lb)
<b>Supported protocols</b>	Pelco-D	<b>Included accessories</b>	Mounting kit, Drill template, Installation guide
<b>Connectors</b>	1x RS485 port	<b>Optional accessories</b>	AXIS T8310 Video Surveillance Control Board, YP3040 Wall Bracket, AXIS T92A20 Housing, AXIS T92E05 Housing, AXIS T92E20 Housing, AXIS PS-24 Mains Adaptor
<b>Mounting</b>	Wall mounting Torque: 1.5 N m (1.1 lb ft) Maximum load: 8 kg (17.6 lb)	<b>Warranty</b>	Axis 1-year warranty, <a href="http://www.axis.com/warranty">www.axis.com/warranty</a>

More information is available at [www.axis.com](http://www.axis.com)

## Dimensions

- YP3040 Pan-Tilt Motor
- YP3040 Wall Bracket

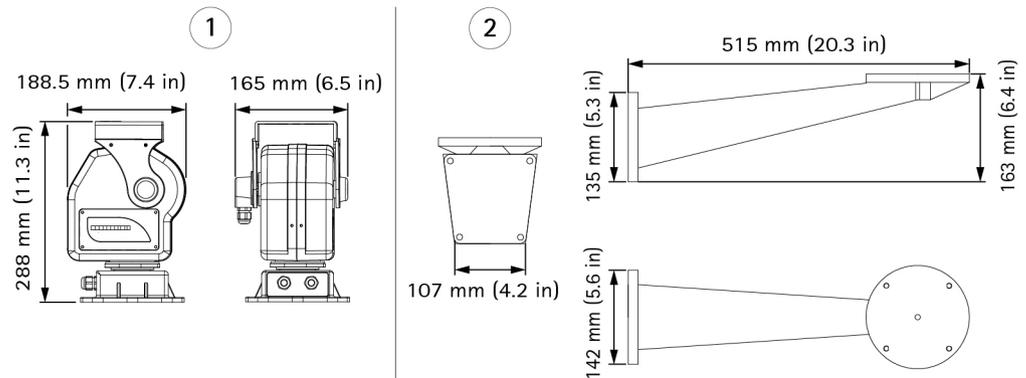

## Optional accessories

- YP3040 Wall Bracket
- Axis housings
- AXIS T8310 Video Surveillance Control Board
- AXIS PS-24 Mains Adaptor

