

AXIS T8125 AC 24V

60W



AS/NZS CISPR 22

가

B

RF

EMC()

가 (B)
가

B
가
가

STP()

FCC

15 B

IEC/EN/UL 60950-1,

RF()

PowerDsine

TV

RoHS()

1~2

EC RoHS 2002/95/
RoHS ACPEIP



가

WEEE

EU WEEE ()
EC 가 2002/96/
EU 가



/TV

WEEE



B

RF

EN 55022

() 가

EN 55024

B

ICES-

003

-
- FAQ
-
- (가
-) (www.axis.com/
techsup/)

가
.Axis
Communications AB

Axis Communications AB

Axis Communications AB

NOTICE

-
- , , 가
-
- 가
- 가
-
- 가
-

Important

-
-
- 가/

NOTICE

-



AXIS T8125 AC 24V

60W

AC

- AXIS T8125 2
- 2 6A 12AWG (2X16AWG).
- " (Earth Ground)" EMI
- : " (Earth Ground)"
- 24V AC AXIS T8125
24V AC . AXIS T8125 AC - 24V AC AXIS T8125
- AXIS T8125 DATA IN DATA & POWER OUT IEC
60950-1 SELV(Safety Extra-Low Voltage)
SELV
- : AXIS T8125 "DATA IN" "DATA & POWER OUT"
RJ-45
(POTS)
RJ45

- !
- AXIS T8125



-
- AXIS T8125
-

AXIS T8125

AXIS T8125

1. 1 2 ()

2. AXIS T8125 AXIS T8125



1:

가 PoE(Power over Ethernet) AXIS T8125

(60W) 2 IEEE802.3af IEEE802.3at 3.2
 . AXIS T8125 DATA & POWER Output
 4 CAT5e

가

- Alt A: 1, 2(-) 3, 6(+)
- Alt B: 4, 5(+) 7, 8(-)

- AXIS T8125 24V AC가
 12AWG 2X16AWG ()

- DATA & POWER OUT

- 가

- AXIS T8125 PoE
 . AXIS T8125


- 가
 100m(333) . AXIS T8125
 가

- 가 AXIS T8125가

- "On/Off" 가 24VAC AXIS T8125

!

AXIS T8125

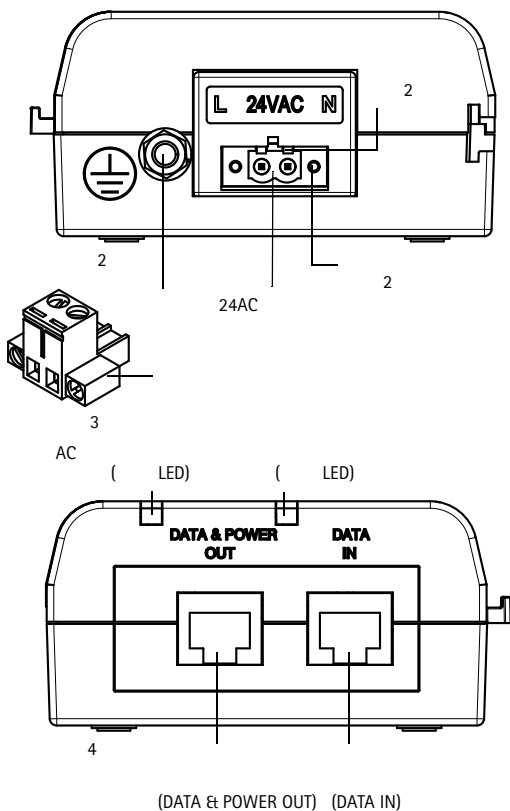

(DATA & POWER OUT) (DATA IN)

LED		
		()

LED		
		가
1Hz	4	가

	-10°C ~ 40°C 14°F ~ 104°F	95%()
	-20°C ~ 70°C -4°F ~ 158°F	

	24V AC $\pm 20\%$ (50/60Hz)
($V_{IN}@24V AC \pm 20\%$)	6A
가	60W
	53.5 ~ 55.5V DC

(DATA IN)	RJ45 female
(DATA & POWER OUT): 10/100/1000Base-T(55VDC)	RJ45 female (1-2, 3-6, 4-5 7-8 DC)

AXIS T8125	<ol style="list-style-type: none"> 가 24V AC $\pm 20\%$
가 AXIS T8125가	<ol style="list-style-type: none"> 가 PoE 5/5e/6 4 DATA IN 가 DATA & POWER RJ45 가
가	<ol style="list-style-type: none"> 가 5 (4) UTP/FTP 가 / 100m

www.axis.com/warranty

AXIS T8125 AC 24V 60W

© Axis Communications AB, 2012-2013

1.1
: 2013 3
50987