


■Axis Dynamic DNS の登録方法

1. ブラウザでネットワークカメラにアクセスし、Setup ページにアクセスします。Basic Setup - TCP/IP ページを開き、AXIS Internet Dynamic DNS Service の項目の Settings ボタンをクリックします。
2. 表示されたページの Register ボタンをクリックします。
3. しばらく待つと、「The registration is performed.」と表示されます。OK をクリックしますと Axis Dynamic DNS の登録サイトへ遷移します。登録が成功したにも関わらず、ページが遷移しない場合は、手動で <http://www.axiscam.net/> にアクセスしてください。

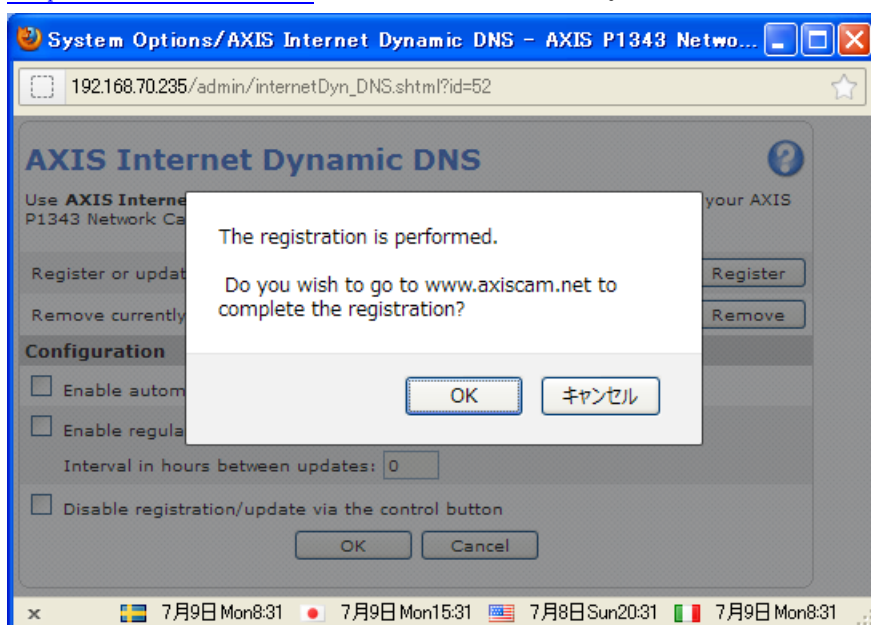


4. 製品のシリアル番号が入っている事を確認、または入力して Proceed ボタンをクリックします。シリアル番号は、本体裏のシールに書かれている 00408C で始まる 12 桁の英数字です。

AXIS Internet Dynamic DNS Service

[Start](#)[Before you start](#)[FAQs](#)[Unregister/Changed ownership?](#)[Terms of service](#)[Glossary](#)

Welcome to the AXIS Internet Dynamic DNS Service. This service makes it easy for you to get your Axis product up and running within minutes.

Using this service means that you do not need to set an IP address for your product. All you need to do is enter the product's serial number in the box below and the service will provide your product with a unique DNS or domain name (URL address) that allows you to access the product and its Web pages from any standard Web browser.



INSTALLATION PROCESS:

- Before starting, please make sure you have followed the procedures in the product's Installation Guide. You can read these online by clicking on [Before you start](#).
- Enter the Axis product's serial number in the box below and click the **Proceed** button.

A 'Terms of Service' page will appear. Once you have agreed to the Terms of Service, you will be notified if you have successfully received a temporary domain name for your product. To keep it for permanent use, please follow the online instructions. You may unregister the product from the service at any time.

TO CHANGE YOUR DNS SETTINGS:

- If you have permanently registered your product, but want to change your settings on this service, please enter your product's serial number below and click the **Proceed** button.

Enter the serial number of your Axis product
(See label on the underside of the product):

Serial number:

Example: 00408C123456

5. 利用規約 (Terms of Service) が表示されますので、内容をご確認の上、一番下の I agree をクリックします。

6. Permanently register my product をクリックします。

You have successfully received a temporary domain name for your Axis product.

Your product's domain name is: <http://axis944a48.axiscam.net> ⓘ *

ⓘ You can now use the domain name above to configure your Axis product and view live images from it. Currently, this can only be done from your local area network (i.e. from a computer on the same network as your Axis product). To enable access to your product via the Internet, you will need to permanently register the product. See details below.

ⓘ Please click on the **Permanently register my product** button below if you want to:

1. keep your domain name for permanent use. Currently, your product's domain name will expire in *14 days*.
2. follow guidelines on how to enable access to your product over the Internet.
3. create your own subdomain name for use in accessing your Axis product over the Internet.

PLEASE NOTE:

Your Axis product's current IP address is: 172.20.70.174

*If the domain name does not work when you click on it, please wait a few minutes and then try again. The domain name takes a few minutes from the time you click the button at the back of the product to be operational.

7. My Axis のアカウントでログインしてください。My Axis へのご登録がまだお済みでない場合は、Register New Account から登録を行ってください。

8. My Axis のアカウントでログインしますと、以下のような画面が表示されます。Advanced Setting をクリックしますとドメイン名の変更が行えます。

AXIS Internet Dynamic DNS Service

[Start](#) [Before you start](#) [FAQs](#) [Unregister/Changed ownership?](#) [Terms of service](#) [Glossary](#) [Log out](#)

Your permanent registration has been successful.

You may now do any of the following:

- ➊ Click [Advanced settings](#)
 1. to follow the guidelines on how to enable access to your product over the Internet
 2. to create your own subdomain name (i.e. myname.axiscam.net) for accessing your product over the Internet
- ➋ Access your Axis product from your local area network using the following domain name:
- ➌ [Exit this service](#)

9. Advanced Setting 画面（設定を保存するには一番下の Save Settings をクリックします）

Advanced settings

If you want to enable your Axis product to be accessible over the Internet, you will need to use the external IP address for the product. See details set below.

The external IP address will reach the Axis product, or if you have a broadband router, it will reach the router. Here, you will need to configure your router for port forwarding, a feature available on most routers. You may follow the instructions set forth in the [port forwarding document](#).

Once your router has been configured, please review the following parameters and their values. Once you have reviewed the settings, click the **Save settings** button. The service will then display the domain names you can use to access your Axis product.

| Parameters | Values |
|---|---|
| Product and software version: | AXIS M1031-W Network Camera version 5.20.3 |
| Product's serial number: | 00408C944A48 |
| External IP address: | 113.32.136.121 |
| HTTP port: | 80 |
| Enter your own subdomain name if you wish: | http:// <input type="text" value="axis-944a48"/> .axiscam.net |


Once you're satisfied with the above settings, click the **Save settings** button below. The AXIS Internet Dynamic DNS Service will then display the domain names you can use to access your Axis product.

文章番号 : 2012070901

※記載の内容は予告無く変更することがあります。記載の内容は 2012 年 7 月現在のものです。

[トラブルシューティング]

カメラのSetupページで、Registerボタンを押したあと、以下のようなメッセージが表示された場合は、Axis Dynamic DNSサーバへの登録に失敗しています。

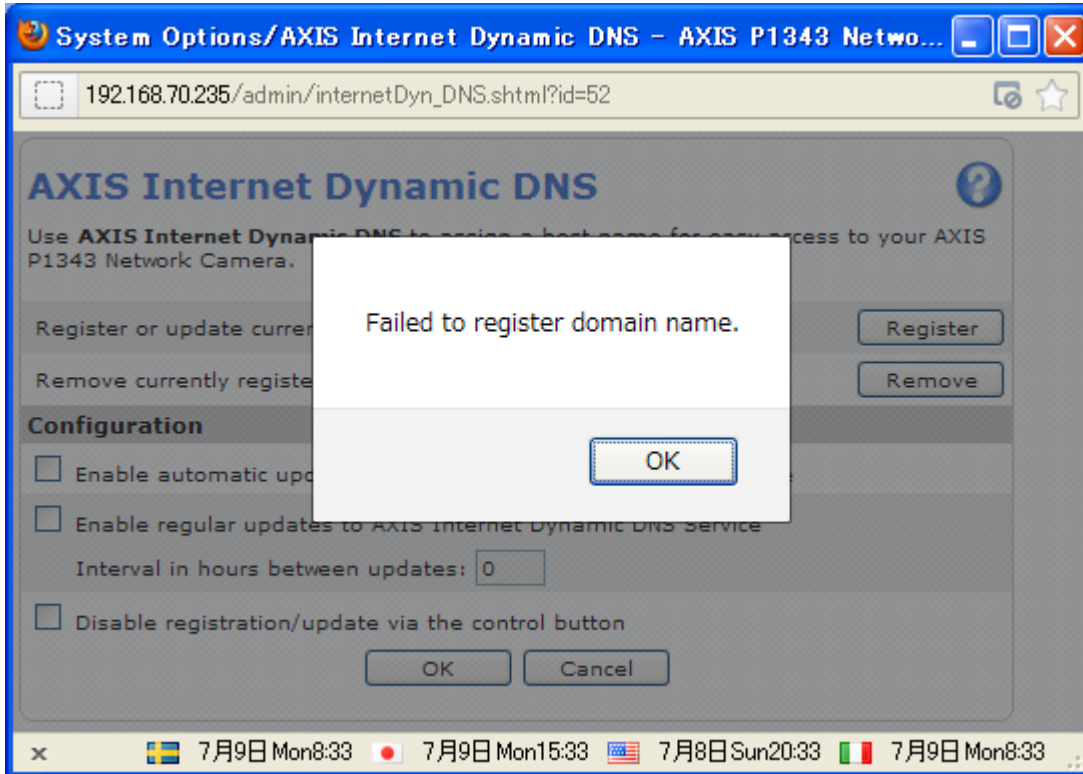

上記のようなメッセージが表示される場合は、Basic Setup - TCP/IP ページでサブネットマスク (Subnet mask)、デフォルトルータ (Default router) がお使いのネットワークに合わせて正しく設定されているかご確認ください。ご確認後、しばらく待ってから再度Registerボタンをクリックしてください。