

# AXIS Q1808-LE Bullet Camera

## Powerful 10 MP surveillance

With 4K and an ultra-high light sensitive 4/3" sensor, this powerful camera delivers exceptional low-light performance and less noise even at great distances. It's available with a choice of lenses; a wide lens for great coverage in open areas and a tele lens for surveillance from a distance. A deep learning processing unit enables more processing power to run advanced features and powerful analytics on the edge. And, with PoE-out you can connect and power other devices without any additional cabling. Furthermore, this robust, outdoor-ready camera features Axis Edge Vault to safeguard the device and protect sensitive information from unauthorized access.

- > **Ultra-high light-sensitive 4/3" image sensor**
- > **Wide or tele Canon lens**
- > **Zipstream with storage profile**
- > **Axis Edge Vault safeguards the device**
- > **PoE-out to power an additional device**



# AXIS Q1808-LE Bullet Camera

## Camera

### Variants

AXIS Q1808-LE  
AXIS Q1808-LE 150 mm

### Image sensor

4/3" progressive scan RGB CMOS  
Pixel size 4.63 µm

### Lens

#### Q1808-LE:

Varifocal, 12-48 mm, F1.7-4.0  
Horizontal field of view: 90°–21°  
Vertical field of view: 49°–12°  
Minimum focus distance: 1.5 m (4.9 ft)  
Remote zoom and focus, P-Iris control

#### Q1808-LE 150 mm:

Varifocal, 50-150 mm, F4.0  
Horizontal field of view: 21°–7°  
Vertical field of view: 12°–4°  
Minimum focus distance: 5 m (16.4 ft)  
Remote zoom and focus, P-Iris control

### Day and night

Automatically removable IR-cut filter in day mode and IR-pass filter 800–900 nm in night mode

### Minimum illumination

#### Q1808-LE:

Color: 0.02 lux at 50 IRE, F1.7  
B/W: 0.004 lux at 50 IRE, F1.7  
0 lux with IR illumination on

#### Q1808-LE 150 mm:

Color: 0.1 lux at 50 IRE, F4.0  
B/W: 0.02 lux at 50 IRE, F4.0  
0 lux with IR illumination on

### Shutter speed

With WDR: 1/22000 s to 2 s in 4K  
With WDR: 1/25500 s to 2 s in 3712x2784  
Without WDR: 1/45500 s to 2 s

### Camera adjustment

Pan ±180°, tilt 0 to -90°, roll -90 to 270°

## System on chip (SoC)

### Model

ARTPEC-8

### Memory

2048 MB RAM, 8192 MB Flash

### Compute capabilities

Deep learning processing unit (DLPU)

## Video

### Video compression

H.264 (MPEG-4 Part 10/AVC) Baseline, Main and High Profiles  
H.265 (MPEG-H Part 2/HEVC) Main Profile  
Motion JPEG

### Resolution

4:3 3712x2784 to 160x120  
16:9: 3840x2160 to 160x90  
16:10 1280x800 to 160x100

### Frame rate

Up to 60 fps (50/60 Hz) in 4K mode  
Up to 30 fps (50/60 Hz) in 4:3 mode

### Video streaming

Up to 20 unique and configurable video streams<sup>1</sup>  
Axis Zipstream technology in H.264 and H.265  
Controllable frame rate and bandwidth  
VBR/ABR/MBR H.264/H.265  
Low latency mode  
Video streaming indicator

### Signal-to-noise ratio

>55 dB

### WDR

Forensic WDR: Up to 120 dB depending on scene

### Multi-view streaming

Up to 8 individually cropped out view areas

1. We recommend a maximum of 3 unique video streams per camera or channel, for optimized user experience, network bandwidth, and storage utilization. A unique video stream can be served to many video clients in the network using multicast or unicast transport method via built-in stream reuse functionality.

## Noise reduction

Spatial filter (2D noise reduction)  
Temporal filter (3D noise reduction)

## Image settings

Saturation, contrast, brightness, sharpness, white balance, day/night threshold, local contrast, tone mapping, exposure mode, exposure zones, defogging, barrel distortion correction, compression, rotation: 0°, 90°, 180°, 270° including corridor format, mirroring, text and image overlay, dynamic text and image overlay, polygon privacy mask  
Scene profiles: forensic, vivid, traffic overview

## Image processing

Axis Zipstream, Forensic WDR, Lightfinder 2.0, OptimizedIR

## Pan/Tilt/Zoom

Digital PTZ, optical zoom, preset positions  
Limited guard tour, control queue, on-screen directional indicator  
Tour recording (max 10, max duration 16 minutes each), guard tour (max 100), adjustable zoom speed

## Audio

### Audio features

Automatic gain control  
Speaker pairing  
Spectrum visualizer<sup>2</sup>

### Audio input

10-band graphic equalizer  
Input for external unbalanced microphone, optional 5 V microphone power  
Digital input, optional 12 V ring power  
Unbalanced line input  
Microphone pairing

### Audio output

Output via speaker pairing

### Audio encoding

24bit LPCM, AAC-LC 8/16/32/44.1/48 kHz, G.711 PCM 8 kHz, G.726 ADPCM 8 kHz, Opus 8/16/48 kHz  
Configurable bit rate

## Network

### Network protocols

IPv4, IPv6, USGv6, ICMPv4/ICMPv6, HTTP, HTTPS<sup>3</sup>, HTTP/2, TLS<sup>3</sup>, QoS Layer 3 DiffServ, FTP, SFTP, CIFS/SMB, SMTP, mDNS (Bonjour), UPnP®, SNMP v1/v2c/v3 (MIB-II), DNS/DNSv6, DDNS, NTP, NTS, RTSP, RTP, SRTP/RTSPS, TCP, UDP, IGMPv1/v2/v3, RTCP, DHCPv4/v6, SSH, LLDP, CDP, MQTT v3.1.1, Secure syslog (RFC 3164/5424, UDP/TCP/TLS), Link-Local address (ZeroConf), IEEE 802.1X (EAP-TLS), IEEE 802.1AR

## System integration

### Application Programming Interface

Open API for software integration, including VAPIX®, metadata and AXIS Camera Application Platform (ACAP); specifications at [axis.com/developer-community](https://axis.com/developer-community).

One-click cloud connection

ONVIF® Profile G, ONVIF® Profile M, ONVIF® Profile S, and ONVIF® Profile T, specifications at [onvif.org](https://onvif.org)

### Video management systems

Compatible with AXIS Camera Station Edge, AXIS Camera Station Pro, AXIS Camera Station 5, and video management software from Axis' partners available at [axis.com/vms](https://axis.com/vms).

### Onscreen controls

Image stabilization  
Day/night shift  
Defogging  
Video streaming indicator

### Event conditions

Device status: above/below/within operating temperature, IP address blocked, IP address removed, live stream active, network lost, new IP address, ring power overcurrent protection, system ready, within operating temperature  
Digital audio: digital signal contains Axis metadata, digital signal has invalid sample rate, digital signal missing, digital signal okay  
Edge storage: recording ongoing, storage disruption, storage health issues detected  
I/O: digital input is active, manual trigger, virtual input  
MQTT: stateless  
Scheduled and recurring: schedule  
Video: average bitrate degradation, day-night mode, tampering

2. Feature available with ACAP

3. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. ([openssl.org](https://openssl.org)), and cryptographic software written by Eric Young ([eay@cryptsoft.com](mailto:eay@cryptsoft.com)).

## Event actions

Day-night mode  
Defog  
I/O: toggle I/O once, toggle I/O while the rule is active  
Illumination: use lights, use lights while the rule is active  
Images: send images through FTP, HTTP, SFTP  
MQTT: publish  
Notification: HTTP, HTTPS, TCP and email  
Overlay text  
Recordings: SD card and network share  
SNMP traps: send, send while the rule is active  
Video clips: send video clips through FTP, HTTP, HTTP, SFTP  
WDR mode

---

## Built-in installation aids

Pixel counter, remote zoom and focus, level grid, leveling assistant

## Analytics

### Applications

Included  
AXIS Object Analytics, AXIS Scene Metadata, AXIS Image Health Analytics  
AXIS Live Privacy Shield, AXIS Video Motion Detection, active tampering alarm, audio detection, orientation aid  
Supported  
AXIS License Plate Verifier, AXIS Perimeter Defender, AXIS Speed Monitor  
Support for AXIS Camera Application Platform enabling installation of third-party applications, see [axis.com/acap](https://axis.com/acap)

---

### AXIS Object Analytics

**Object classes:** humans, vehicles (types: cars, buses, trucks, bikes, other)  
**Scenarios:** line crossing, object in area, time in area, crossline counting<sup>BETA</sup>, occupancy in area<sup>BETA</sup>  
Up to 10 scenarios  
**Other features:** triggered objects visualized with trajectories, color-coded bounding boxes and tables  
Polygon include/exclude areas  
Perspective configuration  
ONVIF Motion Alarm event

---

### AXIS Image Health Analytics

**Detection settings:**  
Tampering: blocked image, redirected image  
Image degradation: blurred image, underexposed image  
**Other features:** sensitivity, validation period

---

## AXIS Scene Metadata

**Object classes:** humans, faces, vehicles (types: cars, buses, trucks, bikes), license plates  
**Object attributes:** vehicle color, upper/lower clothing color, confidence, position

## Approvals

### Product markings

UL/cUL, BIS, UKCA, CE, KC, EAC, VCCI, RCM

---

### Supply chain

TAA compliant

---

### EMC

CISPR 35, CISPR 32 Class A, EN 55035, EN 55032 Class A, EN 50121-4, EN 61000-3-2, EN 61000-3-3, EN 61000-6-1, EN 61000-6-2  
**Australia/New Zealand:** RCM AS/NZS CISPR 32 Class A  
**Canada:** ICES-3(A)/NMB-3(A)  
**Japan:** VCCI Class A  
**Korea:** KS C 9835, KS C 9832 Class A  
**USA:** FCC Part 15 Subpart B Class A  
**Railway:** IEC 62236-4

---

### Safety

CAN/CSA C22.2 No. 62368-1 ed. 3, IEC/EN/UL 62368-1 ed. 3, IEC/EN 62471 risk group 2, IS 13252

---

### Environment

IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78, IEC/EN 60529 IP66, IP67, IEC/EN 62262 IK10 body, IK08 glass, NEMA 250 Type 4X, NEMA TS 2 (2.2.7-2.2.9)

---

### Network

NIST SP500-267

---

### Cybersecurity

ETSI EN 303 645, BSI IT Security Label, FIPS 140

## Cybersecurity

### Edge security

**Software:** Signed OS, brute force delay protection, digest authentication, password protection, Axis Cryptographic Module (FIPS 140-2 level 1)

**Hardware:** Axis Edge Vault cybersecurity platform TPM 2.0 (CC EAL4+, FIPS 140-2 Level 2), secure element (CC EAL 6+), system-on-chip security (TEE), Axis device ID, secure keystore, signed video, secure boot, encrypted filesystem (AES-XTS-Plain64 256bit)

### Network security

IEEE 802.1X (EAP-TLS)<sup>4</sup>, IEEE 802.1AR, HTTPS/HSTS<sup>4</sup>, TLS v1.2/v1.3<sup>4</sup>, Network Time Security (NTS), X.509 Certificate PKI, host-based firewall

### Documentation

*AXIS OS Hardening Guide*

*Axis Vulnerability Management Policy*

*Axis Security Development Model*

AXIS OS Software Bill of Material (SBOM)

To download documents, go to [axis.com/support/cybersecurity/resources](https://axis.com/support/cybersecurity/resources)

To read more about Axis cybersecurity support, go to [axis.com/cybersecurity](https://axis.com/cybersecurity)

## General

### Casing

IP66-, IP67-, and NEMA 4X-rated

IK10 impact-resistant aluminum enclosure with integrated dehumidifying membrane, IK08 impact-resistant glass front window, weathershield with black anti-glare coating

Color: white NCS S 1002-B, black NCS S 9000-N

For repainting instructions, go to the product's support page. For information about the impact on warranty, go to [axis.com/warranty-implication-when-repainting](https://axis.com/warranty-implication-when-repainting).

### Power

Power over Ethernet (PoE) IEEE 802.3at Type 2 Class 4, typical 14.9 W, max 25.5 W

Power over Ethernet (PoE) IEEE 802.3bt Type 3 Class 6, typical 14.9 W, max 51 W

Midspan 60 W, IEEE 802.3bt Type 3 Class 6 required for PoE out IEEE 802.3at Type 2 Class 4 (30 W) to a second device

10–28 V DC, typical 13.7 W, max 25.9 W

20–24 V AC, typical 20.7 VA, max 39.2 VA

### Connectors

Network: Shielded RJ45 10BASE-T/100BASE-TX/1000BASE-T PoE, RJ45 1000BASE-T PoE output to power an external PoE device

I/O: 4-pin 2.5 mm terminal block for two configurable supervised inputs / digital outputs (12 V DC output, max. load 50 mA)

Audio: 3.5 mm mic/line in

Power: DC input

### IR illumination

**Q1808-LE:** Optimized IR with power-efficient, long-life 850 nm IR LEDs and white LED combo

Range of reach 100 m (328 ft) or more depending on the scene

**Q1808-LE 150 mm:** Optimized IR with power-efficient, long-life 850 nm IR LEDs

Range of reach 120 m (394 ft) or more depending on the scene

### Storage

Support for microSD/microSDHC/microSDXC card

Support for SD card encryption (AES-XTS-Plain64 256bit)

Recording to network-attached storage (NAS)

For SD card and NAS recommendations see [axis.com](https://axis.com)

### Operating conditions

Temperature: -40 °C to 60 °C (-40 °F to 140 °F)

Maximum temperature according to NEMA TS 2 (2.2.7): 74 °C (165 °F)

Humidity: 10–100% RH (condensing)

Wind load (sustained): 60 m/s (134 mph)

### Storage conditions

Temperature: -40 °C to 65 °C (-40 °F to 149 °F)

Humidity: 5–95% RH (non-condensing)

### Dimensions

For the overall product dimensions, see the dimension drawing in this datasheet.

Effective Projected Area (EPA): 0.0455 m<sup>2</sup> (0.49 ft<sup>2</sup>)

### Weight

3200g (7.05 lb)

### Box content

Camera, installation guide, terminal block connector, RJ45 cable, connector guard, cable gaskets, owner authentication key

4. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. ([openssl.org](https://openssl.org)), and cryptographic software written by Eric Young ([ey@cryptsoft.com](mailto:ey@cryptsoft.com)).

## Optional accessories

AXIS T8415 Wireless Installation Tool

AXIS Surveillance Cards

For more accessories, go to [axis.com/products/axis-q1808-le#accessories](https://axis.com/products/axis-q1808-le#accessories)

---

## System tools

AXIS Site Designer, AXIS Device Manager, product selector, accessory selector, lens calculator

Available at [axis.com](https://axis.com)

---

## Languages

English, German, French, Spanish, Italian, Russian, Simplified Chinese, Japanese, Korean, Portuguese, Polish, Traditional Chinese, Dutch, Czech, Swedish, Finnish, Turkish, Thai, Vietnamese

---

## Warranty

5-year warranty, see [axis.com/warranty](https://axis.com/warranty)

---

## Part numbers

Available at [axis.com/products/axis-q1808-le#part-numbers](https://axis.com/products/axis-q1808-le#part-numbers)

---

## Sustainability

### Substance control

PVC free, BFR/CFR free in accordance with JEDEC/ECA Standard JS709

RoHS in accordance with EU RoHS Directive 2011/65/EU/ and EN 63000:2018

REACH in accordance with (EC) No 1907/2006. For SCIP UUID, see [echa.europa.eu](https://echa.europa.eu)

---

### Materials

Renewable carbon-based plastic content: 65% (bio-based)

Screened for conflict minerals in accordance with OECD guidelines

To read more about sustainability at Axis, go to [axis.com/about-axis/sustainability](https://axis.com/about-axis/sustainability)

---

### Environmental responsibility

[axis.com/environmental-responsibility](https://axis.com/environmental-responsibility)

Axis Communications is a signatory of the UN Global Compact, read more at [unglobalcompact.org](https://unglobalcompact.org)

## Detect, Observe, Recognize, Identify (DORI)

### **Q1808-LE**


	DORI definition	Distance (wide)	Distance (tele)
Detect	25 px/m (8 px/ft)	105.4 m (345.7 ft)	407.1 m (1335.3 ft)
Observe	63 px/m (19 px/ft)	41.8 m (137.1 ft)	161.6 m (530.0 ft)
Recognize	125 px/m (38 px/ft)	21.1 m (69.2 ft)	81.4 m (267.0 ft)
Identify	250 px/m (76 px/ft)	10.5 m (34.44 ft)	40.7 m (133.5 ft)

### **Q1808-LE 150 mm**

	DORI definition	Distance (wide)	Distance (tele)
Detect	25 px/m (8 px/ft)	426.9 m (1400.2 ft)	1275.8 m (4184.6 ft)
Observe	63 px/m (19 px/ft)	169.4 m (555.6 ft)	506.3 m (1660.7 ft)
Recognize	125 px/m (38 px/ft)	85.4 m (280.1 ft)	255.1 m (836.7 ft)
Identify	250 px/m (76 px/ft)	42.7 m (140.1 ft)	127.6 m (418.5 ft)

The DORI values are calculated using pixel densities for different use cases as recommended by the EN-62676-4 standard. The calculations use the center of the image as the reference point and consider lens distortion. The possibility to recognize or identify a person or object depends on factors such as object motion, video compression, lighting conditions, and camera focus. Use margins when planning. The pixel density varies across the image, and the calculated values can differ from the distances in the real world.


## Dimension drawings

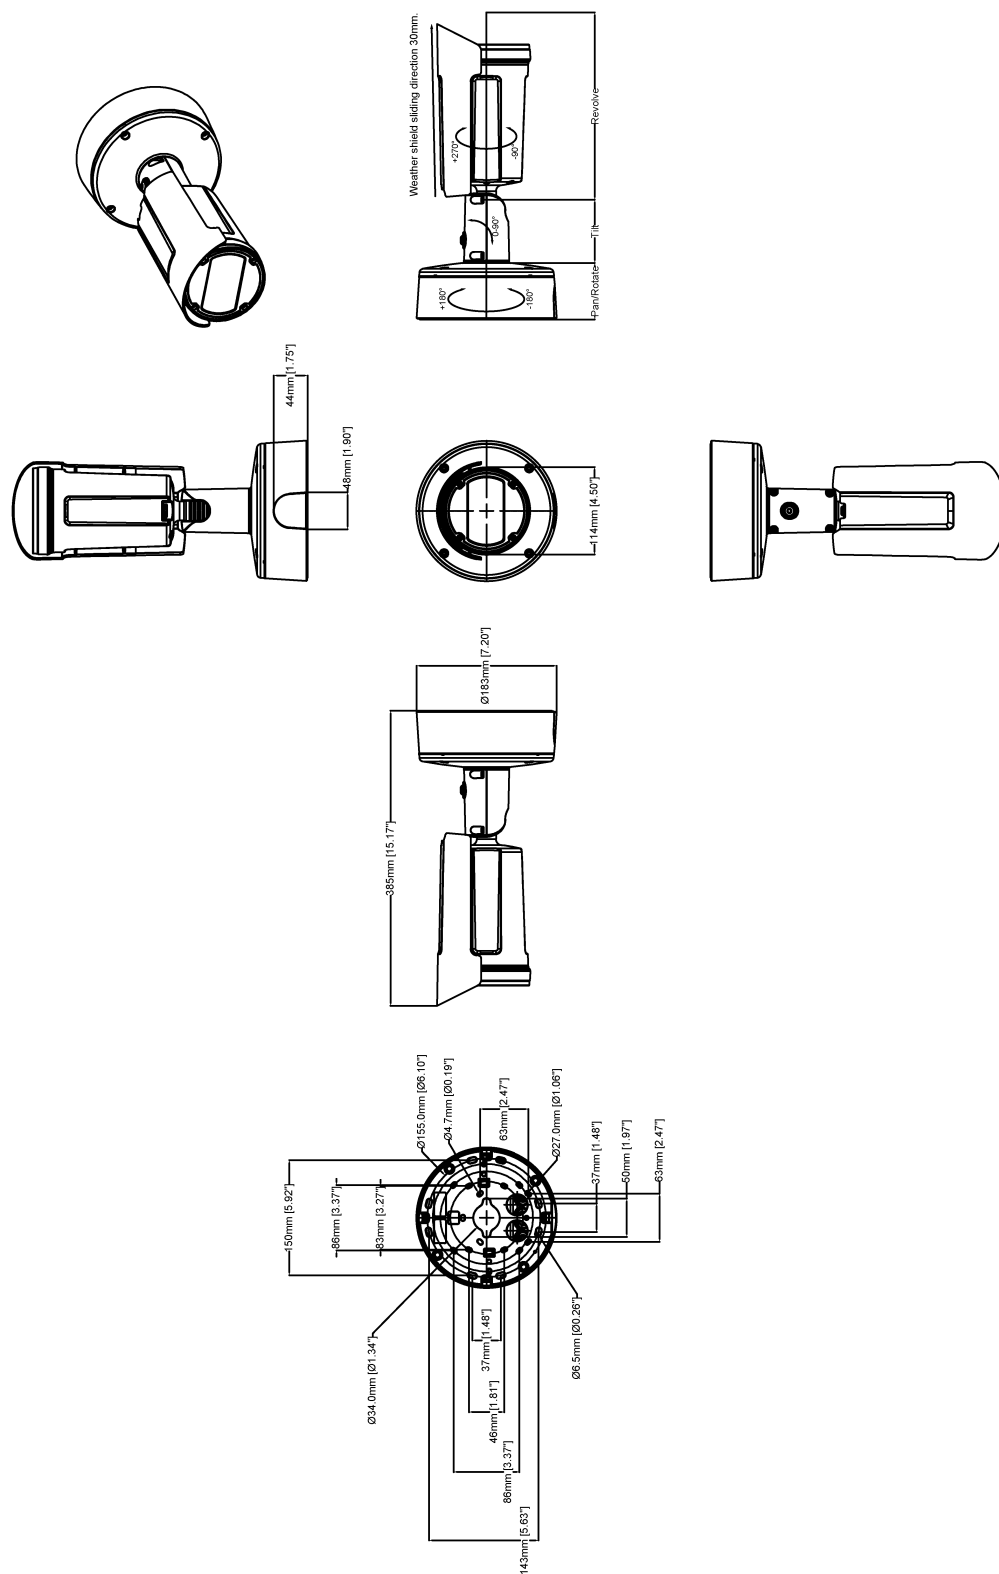

Revision	v.01	Revision date	2023-04-24
Paper size	A4	Release date	2023-04-24
Created by	MF	Scale	1:8

© 2023 Axis Communications

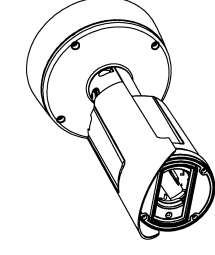

© 2023 Axis Communications

## Highlighted capabilities

### AXIS Object Analytics

AXIS Object Analytics is a preinstalled, multifeatured video analytics that detects and classifies humans, vehicles, and types of vehicles. Thanks to AI-based algorithms and behavioral conditions, it analyzes the scene and their spatial behavior within – all tailored to your specific needs. Scalable and edge-based, it requires minimum effort to set up and supports various scenarios running simultaneously.

### Axis Edge Vault

Axis Edge Vault is the hardware-based cybersecurity platform that safeguards the Axis device. It forms the foundation that all secure operations depend on and offer features to protect the device's identity, safeguard its integrity and protect sensitive information from unauthorized access. For instance, **secure boot** ensures that a device can boot only with **signed OS**, which prevents physical supply chain tampering. With signed OS, the device is also able to validate new device software before accepting to install it. And the **secure keystore** is the critical building-block for protecting cryptographic information used for secure communication (IEEE 802.1X, HTTPS, Axis device ID, access control keys etc.) against malicious extraction in the event of a security breach. The secure keystore and secure connections are provided through a Common Criteria or FIPS 140 certified hardware-based cryptographic computing module.

Furthermore, signed video ensures that video evidence can be verified as untampered. Each camera uses its unique video signing key, which is securely stored in the secure keystore, to add a signature into the video stream allowing video to be traced back to the Axis camera from where it originated.

To read more about Axis Edge Vault, go to [axis.com/solutions/edge-vault](https://axis.com/solutions/edge-vault).

### Electronic image stabilization

Electronic image stabilization (EIS) provides smooth video in situations where a camera is subject to vibrations. Built-in gyroscopic sensors continuously detect the camera's movements and vibrations, and they automatically adjust the frame to ensure you always capture the details you need. Electronic image stabilization relies on different algorithms for modeling camera motion, which are used to correct the images.

### Forensic WDR

Axis cameras with wide dynamic range (WDR) technology make the difference between seeing important forensic details clearly and seeing nothing but a blur in challenging light conditions. The difference between the darkest and the brightest spots can spell

trouble for image usability and clarity. Forensic WDR effectively reduces visible noise and artifacts to deliver video tuned for maximal forensic usability.

### Lightfinder

The Axis Lightfinder technology delivers high-resolution, full-color video with a minimum of motion blur even in near darkness. Because it strips away noise, Lightfinder makes dark areas in a scene visible and captures details in very low light. Cameras with Lightfinder discern color in low light better than the human eye. In surveillance, color may be the critical factor to identify a person, an object, or a vehicle.

### OptimizedIR

Axis OptimizedIR provides a unique and powerful combination of camera intelligence and sophisticated LED technology, resulting in our most advanced camera-integrated IR solutions for complete darkness. In our pan-tilt-zoom (PTZ) cameras with OptimizedIR, the IR beam automatically adapts and becomes wider or narrower as the camera zooms in and out to make sure that the entire field of view is always evenly illuminated.

### Zipstream

The Axis Zipstream technology preserves all the important forensic in the video stream while lowering bandwidth and storage requirements by an average of 50%. Zipstream also includes three intelligent algorithms, which ensure that relevant forensic information is identified, recorded, and sent in full resolution and frame rate.

For more information, see [axis.com/glossary](https://axis.com/glossary)