

AXIS Q2111-E Thermal Camera

Long-range detection and verification

Ideal for perimeter security, this robust camera offers reliable detection and verification 24/7 all while protecting privacy. It features a powerful sensor with extremely high thermal sensitivity and a 60 mm lens. Plus, it can be mounted on a positioning unit for 360° unobstructed views. And AXIS Perimeter Defender is available for enhanced protection. Built on a powerful platform, it's possible to add third-party analytics. With edge-to-edge technology, you can easily integrate and trigger other devices such as a network speaker. Furthermore, Axis Edge Vault safeguards your device and protects sensitive information from unauthorized access.

- > [Reliable long-range thermal detection](#)
- > [Flexible mounting options](#)
- > [Support for powerful analytics](#)
- > [Four I/O ports and edge-to-edge](#)
- > [Built-in cybersecurity with Axis Edge Vault](#)



AXIS Q2111-E Thermal Camera

Camera

Image sensor

Uncooled microbolometer 384x288 pixels, pixel size 17 μm .
Spectral range: 8-14 μm

Lens

60 mm, F1.2
Horizontal field of view: 6°
Vertical field of view: 4.7°
Minimum focus distance: 84 m (276 ft)

Sensitivity

NETD <20 mK @25 °C, F1.0

Pan/Tilt

Supporting guard tour with up to 256 preset positions
(positioning unit sold separately)

System on chip (SoC)

Model

ARTPEC-8

Memory

2048 MB RAM, 8192 MB Flash

Compute capabilities

Deep learning processing unit (DLPU)

Video

Video compression

H.264 (MPEG-4 Part 10/AVC) Baseline, Main and High Profiles
H.265 (MPEG-H Part 2/HEVC) Main Profile
Motion JPEG

Resolution

Sensor is 384x288. Image can be scaled up to 768x576.

Frame rate

Up to 8.3 fps or 30 fps depending on model

Video streaming

Up to 20 unique and configurable video streams¹
Axis Zipstream technology in H.264 and H.265
Controllable frame rate and bandwidth
VBR/ABR/MBR H.264/H.265
Video streaming indicator

Image settings

Contrast, brightness, sharpness, local contrast, exposure zones, compression, rotation: 0°, 90°, 180°, 270° including corridor format, mirroring, text and image overlay, polygon privacy mask, electronic image stabilization, multiple color palettes

Image processing

Axis Zipstream

Audio

Features

AGC automatic gain control
Network speaker pairing
Spectrum visualizer²

Streaming

Configurable duplex:
Two-way (half duplex, full duplex)

Input

10-band graphic equalizer
Input for external unbalanced microphone, optional 5 V microphone power
Digital input, optional 12 V ring power
Unbalanced line input

Output

Output via network speaker pairing
Line output

Encoding

24bit LPCM, AAC-LC 8/16/32/44.1/48 kHz, G.711 PCM 8 kHz, G.726 ADPCM 8 kHz, Opus 8/16/48 kHz
Configurable bit rate

- 1. We recommend a maximum of 3 unique video streams per camera or channel, for optimized user experience, network bandwidth, and storage utilization. A unique video stream can be served to many video clients in the network using multicast or unicast transport method via built-in stream reuse functionality.*
- 2. Feature available with ACAP*

Network

Network protocols

IPv4, IPv6 USGv6, ICMPv4/ICMPv6, HTTP, HTTPS³, HTTP/2, TLS³, QoS Layer 3 DiffServ, FTP, SFTP, CIFS/SMB, SMTP, mDNS (Bonjour), UPnP[®], SNMP v1/v2c/v3 (MIB-II), DNS/DNSv6, DDNS, NTP, PTP, NTS, RTSP, RTP, SRTP/RTSPS, TCP, UDP, IGMPv1/v2/v3, RTCP, ICMP, DHCPv4/v6, ARP, SSH, LLDP, CDP, MQTT v3.1.1, Secure syslog (RFC 3164/5424, UDP/TCP/TLS), Link-Local address (ZeroConf)

System integration

Application Programming Interface

Open API for software integration, including VAPIX[®] and AXIS Camera Application Platform (ACAP); specifications at axis.com/developer-community.

One-click cloud connection

ONVIF[®] Profile G, ONVIF[®] Profile M, ONVIF[®] Profile S, and ONVIF[®] Profile T, specifications at onvif.org

Video management systems

Compatible with AXIS Camera Station Edge, AXIS Camera Station Pro, AXIS Camera Station 5, and video management software from Axis' partners available at axis.com/vms.

Onscreen controls

Electronic image stabilization

Video streaming indicator

Privacy masks

Media clip

Heater

Edge-to-edge

Speaker pairing

Event conditions

Audio: audio detection, audio clip playing

Device status: above operating temperature, above or below operating temperature, below operating temperature, within operating temperature, IP address removed, new IP address, network lost, system ready, ring power overcurrent protection, live stream active, casing open

Digital audio input status

Edge storage: recording ongoing, storage disruption, storage health issues detected

I/O: digital input, manual trigger, virtual input

MQTT: subscribe

Scheduled and recurring: schedule

Video: average bitrate degradation, tampering

Event actions

Audio clips: play, stop

I/O: toggle I/O once, toggle I/O while the rule is active

MQTT: publish

Notification: HTTP, HTTPS, TCP, and email

Overlay text

Pre- and post-alarm video or image buffering for recording or upload

Recordings: SD card and network share

SNMP traps: send, send while the rule is active

Status LED: flash

Upload of images or video clips: FTP, SFTP, HTTP, HTTPS, network share, and email

Built-in installation aids

Pixel counter, level grid

Analytics

Applications

Included

AXIS Video Motion Detection, AXIS Motion Guard, AXIS Fence Guard, AXIS Loitering Guard, active tampering alarm, audio detection

Supported

AXIS Perimeter Defender

Support for AXIS Camera Application Platform enabling installation of third-party applications, see axis.com/acap

Approvals

Product markings

CSA, UL/cUL, CE, KC, VCCI, RCM

Supply chain

TAA compliant

EMC

CISPR 35, CISPR 32 Class A, EN 50121-4, EN 55032 Class A, EN 55035, EN 61000-3-2, EN 61000-3-3, EN 61000-6-1, EN 61000-6-2

Australia/New Zealand: RCM AS/NZS CISPR 32 Class A

Canada: ICES(A)/NMB(A)

Japan: VCCI Class A

Korea: KS C 9835, KS C 9832 Class A

USA: FCC Part 15 Subpart B Class A

Railway: IEC 62236-4

Safety

CAN/CSA C22.2 No. 62368-1 ed. 3,

IEC/EN/UL 62368-1 ed. 3, IS 13252

3. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (openssl.org), and cryptographic software written by Eric Young (ey@cryptsoft.com).

Environment

IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6,
IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78,
IEC/EN 60529 IP66/IP67, IEC/EN 62262 IK10⁴,
ISO 21207 Method B, MIL-STD-810H (Method 501.7,
502.7, 505.7, 506.6, 507.6, 509.7, 510.7, 512.6, 514.8,
516.8, 521.4)⁵, NEMA 250 Type 4X,
NEMA TS 2 (2.2.7-2.2.9)

Network

NIST SP500-267

Cybersecurity

ETSI EN 303 645, BSI IT Security Label, FIPS-140

Cybersecurity

Edge security

Software: Signed firmware, brute force delay protection, digest authentication and OAuth 2.0 RFC6749 Client Credential Flow/OpenID Authorization Code Flow for centralized ADFS account management, password protection, Axis Cryptographic Module (FIPS 140-2 level 1)

Hardware: Axis Edge Vault cybersecurity platform TPM 2.0 (CC EAL4+, FIPS 140-2 Level 2), secure element (CC EAL 6+), system-on-chip security (TEE), Axis device ID, secure keystore, signed video, secure boot, encrypted filesystem (AES-XTS-Plain64 256bit)

Network security

IEEE 802.1X (EAP-TLS, PEAP-MSCHAPv2)⁶,
IEEE 802.1AE (MACsec PSK/EAP-TLS), IEEE 802.1AR,
HTTPS/HSTS⁶, TLS v1.2/v1.3⁶, Network Time Security
(NTS), X.509 Certificate PKI, host-based firewall

Documentation

AXIS OS Hardening Guide

Axis Vulnerability Management Policy

Axis Security Development Model

AXIS OS Software Bill of Material (SBOM)

To download documents, go to axis.com/support/cybersecurity/resources

To read more about Axis cybersecurity support, go to axis.com/cybersecurity

General

Casing

IP66/IP67-, NEMA 4X-, and IK10-rated⁴

Aluminum

Color: white NCS S 1002-B

For repainting instructions, go to the product's support page. For information about the impact on warranty, go to axis.com/warranty-implication-when-repainting.

Power

Power over Ethernet (PoE) IEEE 802.3af/802.3at Type 2 Class 4

Typical 5.6 W, max 25.5 W

10-28 V DC, typical 4.1 W, max 25.5 W

Connectors

Network: RJ45 10BASE-T/100BASE-TX/1000BASE-T PoE

I/O: Terminal block for two supervised and two unsupervised configurable inputs / digital outputs (12 V DC output, max. load 50 mA)

Audio: 3.5 mm mic/line in, 3.5 mm line out

Serial communication: RS485/RS422, 2 pcs, 2 pos, full duplex, terminal block

Power: DC input, terminal block

Storage

Support for microSD/microSDHC/microSDXC card
Support for SD card encryption (AES-XTS-Plain64 256bit)

Recording to network-attached storage (NAS)

For SD card and NAS recommendations see axis.com

Operating conditions

-40 °C to 60 °C (-40 °F to 140 °F)

Maximum temperature according to NEMA TS 2 (2.2.7):
74 °C (165 °F)

Humidity 10-100% RH (condensing)

Storage conditions

-40 °C to 65 °C (-40 °F to 149 °F)

Humidity 5-95% RH (non-condensing)

Dimensions

For the overall product dimensions, see the dimension drawing in this datasheet.

Effective Projected Area (EPA): 0.05 m² (0.48 ft²)

Weight

3.5 kg (7.7 lb)

4. Excluding front window

5. 514.8 and 516.8 only applicable to 60mm lens variant.

6. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (openssl.org), and cryptographic software written by Eric Young (eay@cryptsoft.com).

Box content

Camera, installation guide, terminal block connectors, connector guard, cable gaskets, owner authentication key

Optional accessories

AXIS TQ1818-E Positioning Unit, AXIS TQ1003-E Wall Mount

For more accessories, go to axis.com/products/axis-q2111-e#accessories

System tools

AXIS Site Designer, AXIS Device Manager, product selector, accessory selector, lens calculator

Available at axis.com

Languages

English, German, French, Spanish, Italian, Russian, Simplified Chinese, Japanese, Korean, Portuguese, Polish, Traditional Chinese, Dutch, Czech, Swedish, Finnish, Turkish, Thai, Vietnamese

Warranty

5-year warranty, see axis.com/warranty

Export control

This product is subject to export control regulations, and you should always comply with all applicable national and international export or re-export control regulations.

Part numbers

Available at axis.com/products/axis-q2111-e#part-numbers

Sustainability

Substance control

PVC free, BFR/CFR free in accordance with JEDEC/ECA Standard JS709

RoHS in accordance with EU RoHS Directive 2011/65/EU/ and EN 63000:2018

REACH in accordance with (EC) No 1907/2006.

Materials

Renewable carbon-based plastic content: 8% (recycled: 2%, bio-based: 6%)

Screened for conflict minerals in accordance with OECD guidelines

To read more about sustainability at Axis, go to axis.com/about-axis/sustainability

Environmental responsibility

axis.com/environmental-responsibility


Axis Communications is a signatory of the UN Global Compact, read more at unglobalcompact.org

Detect, Recognize, Identify (DRI)

AXIS Q2111-E		
	Definition	Distance
Detect	1.5 pixels	Human: 1,774 m (5,819 ft) Vehicle: 5,441 m (17,850 ft)
Recognize	6 pixels	Human: 444 m (1,456 ft) Vehicle: 1,360 m (4,460 ft)
Identify	12 pixels	Human: 222 m (728 ft) Vehicle: 680 m (2,230 ft)

We used Johnson's criteria to calculate the theoretical values shown in the table. Human and vehicle sizes were assumed to be 1.8 x 0.5 m and 4.0 x 1.5 m, respectively.

Thoroughly evaluate your scene using, for example, AXIS Site Designer. Consider factors like weather conditions when determining actual detection distances.

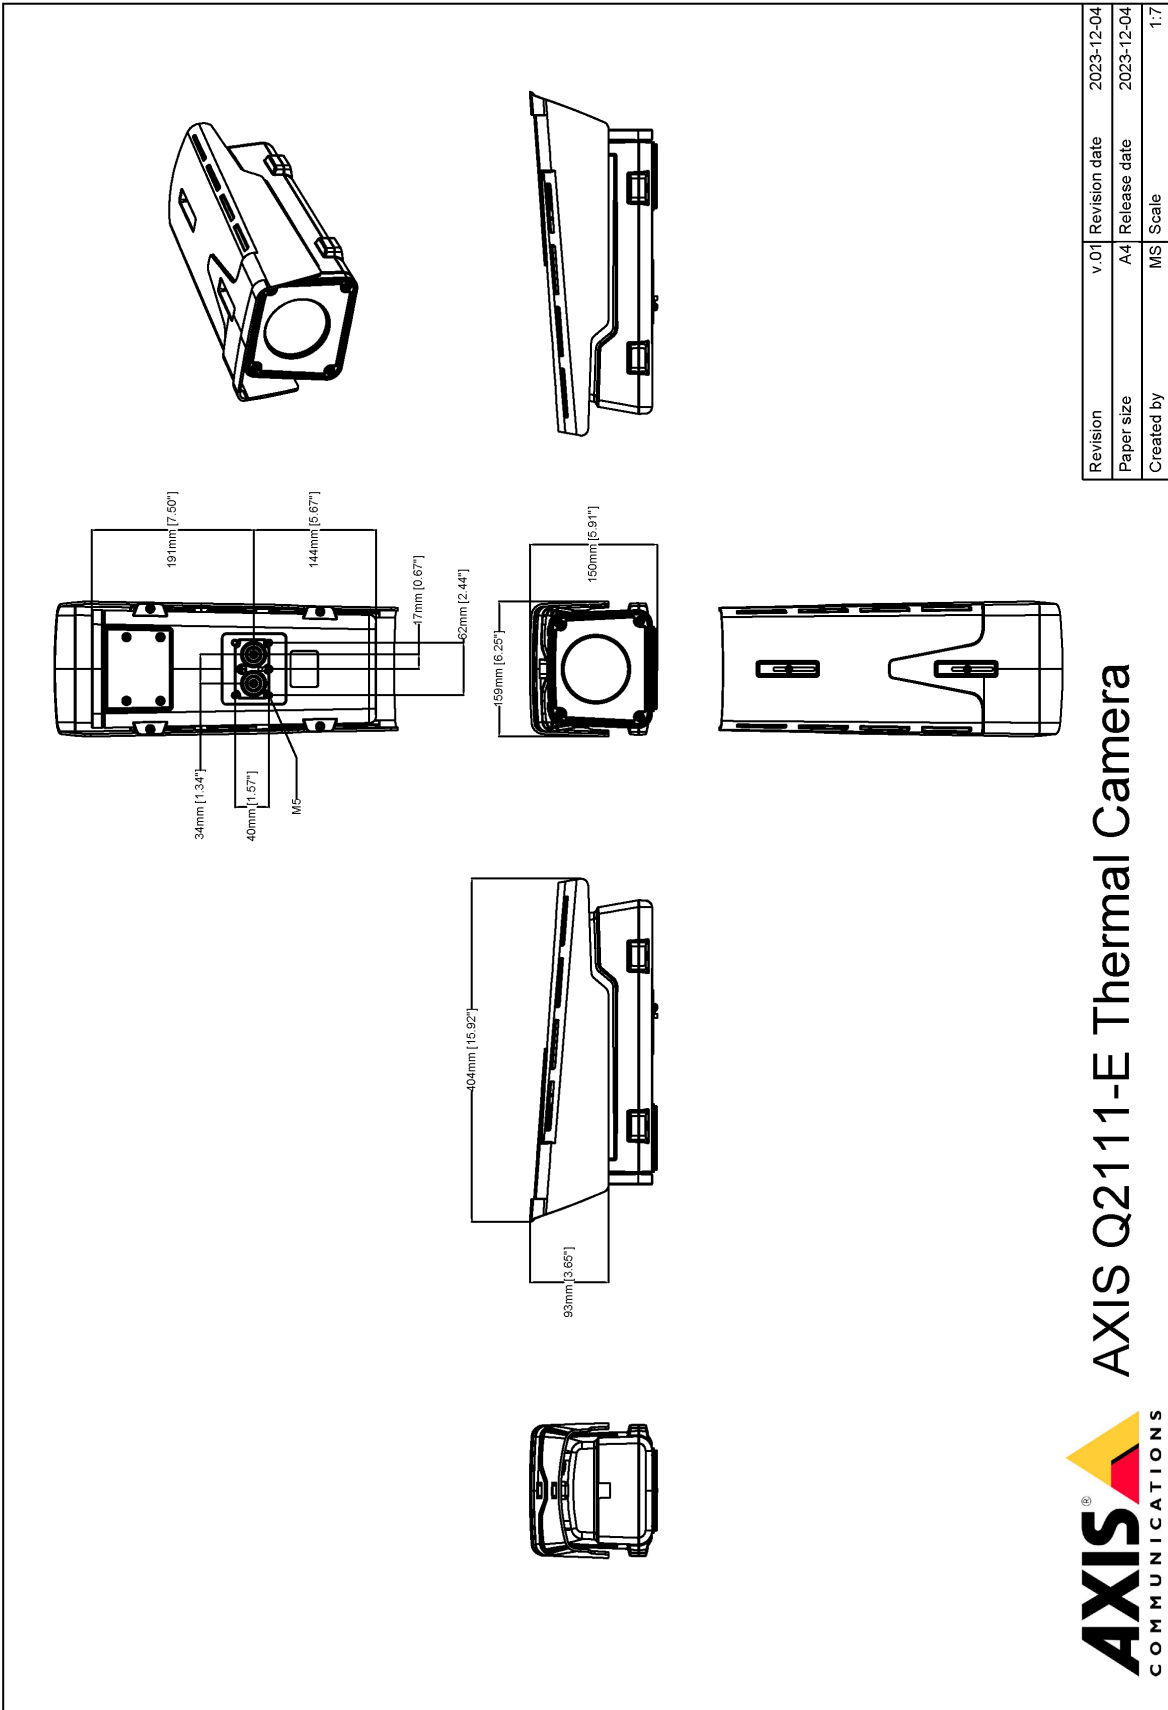

Revision	v.01	Revision date	2023-12-04
Paper size	A4	Release date	2023-12-04
Created by	MS	Scale	1:7

© 2023 Axis Communications

AXIS COMMUNICATIONS **AXIS Q2111-E Thermal Camera**

www.axis.com