

AXIS M3945-R Dome Camera

2 MP indoor camera with audio for buses

This rugged AI-powered indoor camera delivers great 2 MP image quality even in challenging light conditions. It's available in four variations with different connectors and lens options. A built-in microphone and audio-in let you complement video material with audio. It's ECE R10 rev.06, UN ECE R118, and IEC 60721-3-5 5M6 certified for use on buses. When used with AXIS TP3826-E, it can be mounted on the outside of the bus. Scene profiles help optimize image quality by selecting the right settings for each environment. Furthermore, with the same form-factor, backplate, and accessories as other Axis onboard cameras, it's easy to upgrade existing installations.

- > **Complies with transportation industry regulations**
- > **Microphone and support for audio-in**
- > **Scene profiles to optimize image settings**
- > **Lightfinder 2.0 and Forensic WDR**
- > **Built-in cybersecurity features with Axis Edge Vault**



AXIS M3945-R Dome Camera

Camera

Variants

AXIS M3945-R M12 2.8 mm
AXIS M3945-R M12 3.6 mm
AXIS M3945-R RJ45 2.8 mm
AXIS M3945-R RJ45 3.6 mm

Image sensor

1/2.8" progressive scan RGB CMOS
Pixel size 2.8 µm

Lens

2.8 mm, F2.0 :
Horizontal field of view: 99°
Vertical field of view: 55°
Minimum focus distance: 1 m (3.2 ft)
M12 mount, fixed iris
3.6 mm, F2.0:
Horizontal field of view: 83°
Vertical field of view: 44°
Minimum focus distance: 0.3 m (1.0 ft)
M12 mount, fixed iris
See [Optional accessories](#) for exchangeable lenses

Minimum illumination

Color: 0.16 lux at 50 IRE, F2.0

Shutter speed

1/31500 s to 1/2 s

Camera adjustment

Pan ±30°, tilt 0–90°, rotation –179° to 180°

System on chip (SoC)

Model

CV75

Memory

2 GB RAM, 8 GB Flash

Compute capabilities

Deep learning processing unit (DLPU)

Video

Video compression

H.264 (MPEG-4 Part 10/AVC) Main and High Profiles
H.265 (MPEG-H Part 2/HEVC) Main Profile
Motion JPEG

Resolution

16:9: 1920x1080 to 640x360
4:3: 1280x960 to 320x240
11:9: 704x576
5:4: 720x576

Frame rate

1920x1080 (16:9) @25/30 fps (with WDR)
1920x1080 (16:9) @50/60 fps (without WDR)

Video streaming

Up to 10 unique and configurable video streams ⁽¹⁾
Axis Zipstream technology in H.264 and H.265
Controllable frame rate and bandwidth
VBR/ABR/MBR H.264/H.265
Video streaming indicator

WDR

Forensic WDR: Up to 120 dB depending on scene

Noise reduction

Spatial filter (2D noise reduction)
Temporal filter (3D noise reduction)

Image settings

Saturation, contrast, brightness, sharpness, white balance, local contrast, tone mapping, exposure mode, exposure zones, compression, rotation: 0°, 90°, 180°, 270° including corridor format, mirroring, text and image overlay, dynamic text and image overlay, privacy masks
Scene profiles: forensic, vivid, traffic overview

Image processing

Axis Zipstream, Forensic WDR, Lightfinder 2.0

Pan/Tilt/Zoom

Digital PTZ, preset positions
Limited guard tour, control queue

1. We recommend a maximum of 3 unique video streams per camera or channel, for optimized user experience, network bandwidth, and storage utilization. A unique video stream can be served to many video clients in the network using multicast or unicast transport method via built-in stream reuse functionality.

Audio

Features

Automatic gain control
10-band graphic equalizer for audio input

Input

Built-in microphone (can be disabled)
Physical microphone switch

Built-in microphone specification

Max sound pressure level: 128 dB
Frequency range: 100 - 10000 Hz

Encoding

LPCM 48 kHz, AAC-LC 8/16/32/44.1/48 kHz, G.711 PCM 8 kHz, G.726 ADPCM 8 kHz, Opus 8/16/48 kHz
Configurable bitrate

Network

Network protocols

IPv4, IPv6, USGv6, ICMPv4/ICMPv6, HTTP, HTTPS⁽²⁾, HTTP/2, TLS⁽²⁾, QoS Layer 3 DiffServ, FTP, SFTP, CIFS/SMB, SMTP, mDNS (Bonjour), UPnP®, SNMP v1/v2c/v3 (MIB-II), DNS/DNSv6, DDNS, NTP, NTS, RTSP, RTP, SRTP/RTSPS, TCP, UDP, IGMPv1/v2/v3, RTCP, ICMP, DHCPv4/v6, ARP, SSH, LLDP, CDP, MQTT v3.1.1, Secure syslog (RFC 3164/5424, UDP/TCP/TLS), Link-Local address (ZeroConf)

System integration

Application Programming Interface

Open API for software integration, including VAPIX®, metadata and AXIS Camera Application Platform (ACAP); specifications at axis.com/developer-community.

One-click cloud connection
ONVIF® Profile G, ONVIF® Profile M, ONVIF® Profile S, and ONVIF® Profile T, specifications at onvif.org
Support for Voice over IP (VoIP) through the Session Initiation Protocol (SIP), using peer-to-peer (P2P) or Private Branch Exchange (PBX).

Video management systems

Compatible with AXIS Camera Station Edge, AXIS Camera Station Pro, AXIS Camera Station 5, and video management software from Axis' partners available at axis.com/vms.

Onscreen controls

Wide dynamic range
Privacy masks

Event conditions

Application
Audio: physical microphone switch
Call: state, state change
Device status: above/below/within operating temperature, audit logs, IP address blocked/removed, live stream active, network lost, new IP address, system ready, within operating temperature
Edge storage: recording ongoing, storage disruption, storage health issues detected
I/O: manual trigger, virtual input is active
MQTT: MQTT client connected, stateless
Scheduled and recurring: schedule
Video: average bitrate degradation, tampering

Event actions

Calls: answer call, end calls, make call
LEDs: flash status LED, flash status LED while the rule is active
MQTT: send MQTT publish message
Notification: HTTP, HTTPS, TCP and email
Overlay text: use overlay text, use overlay text while the rule is active
Recordings: record video, record video while the rule is active
Security: erase configuration
SNMP trap messages: send, send while the rule is active
Images or video clips: FTP, SFTP, HTTP, HTTPS, network share and email
WDR mode: set WDR mode, set WDR mode while the rule is active

Built-in installation aids

Pixel counter, level grid

Analytics

Applications

Included

AXIS Tampering Detection, AXIS Video Motion Detection
Support for AXIS Camera Application Platform enabling installation of third-party applications, see axis.com/acap

Approvals

Product markings

BSMI, CE, ECE, FCC, KC, NOM, RCM, UL/cUL, VCCI, WEEE

2. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (openssl.org), and cryptographic software written by Eric Young (ey@cryptsoft.com).

Supply chain

TAA compliant
NDAA 2023 compliant

EMC

EN 55032 Class A, EN 55035, EN 61000-6-1,
EN 61000-6-2, ECE R10 rev.06, EN 50498
Australia/New Zealand: RCM AS/NZS CISPR 32 Class A
Canada: ICES(A)/NMB(A)
Japan: VCCI Class A
Korea: KS C 9835, KS C 9832 Class A
USA: FCC Part 15 Subpart B Class A

Safety

CAN/CSA C22.2 No. 62368-1 ed. 3,
IEC/EN 62368-1 ed. 3,
UL 62368-1 ed. 3,
UN ECE R118

Environment

IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-14,
IEC 60068-2-27, IEC 60068-2-64, IEC 60529 IP66/IP67,
IEC 62262 IK10, NEMA 250 Type 4X,
IEC 60721-3-5 Class 5M6

Network

NIST SP500-267, IPv6 USGv6

Cybersecurity

ETSI EN 303 645, FIPS 140

Cybersecurity

Edge security

Software: Signed OS, brute force delay protection, digest authentication and OAuth 2.0 RFC6749 Client Credential Flow/OpenID Authorization Code Flow for centralized ADFS account management, password protection, Axis Cryptographic Module (FIPS 140-2 level 1)

Hardware: Axis Edge Vault cybersecurity platform
Secure keystore: secure element (CC EAL 6+, FIPS 140-3 Level 3), system-on-chip security (TEE)
Axis device ID, signed video, secure boot, encrypted filesystem (AES-XTS-Plain64 256bit)

Network security

IEEE 802.1X (EAP-TLS, PEAP-MSCHAPv2)⁽³⁾, IEEE 802.1AR, HTTPS/HSTS⁽³⁾, TLS v1.2/v1.3⁽³⁾, Network Time Security (NTS), host-based firewall,

Documentation

AXIS OS Hardening Guide
Axis Vulnerability Management Policy
Axis Security Development Model
AXIS OS Software Bill of Material (SBOM)
To download documents, go to axis.com/support/cybersecurity/resources
To read more about Axis cybersecurity support, go to axis.com/cybersecurity

General

Casing

IP66/67-, NEMA 4X- and IK10-rated
Aluminum and plastic casing
For repainting instructions, go to the product's support page. For information about the impact on warranty, go to axis.com/warranty-implication-when-repainting.

Mounting

Inside vehicles

Power

Power over Ethernet (PoE) IEEE 802.3af Type 1 Class 2, Typical 3.55 W, max 4.42 W

Connectors

RJ45: 10BASE-T/100BASE-TX PoE
M12: female, rugged, D-coded with rotatable coupling nut
All connectors support PoE

Storage

Support for microSD/microSDHC/microSDXC card
Support for SD card encryption (AES-XTS-Plain64 256bit)
Recording to network-attached storage (NAS)
For SD card and NAS recommendations see axis.com

Operating conditions

-30 °C to 55 °C (-22 °F to 131 °F)
Maximum temperature (intermittent): 70 °C (158 °F)
Humidity: 10–100% RH (condensing)

Storage conditions

Temperature: -40 °C to 65 °C (-40 °F to 149 °F)
Humidity: 5–95% RH (non-condensing)

Dimensions

For the overall product dimensions, see the dimension drawing in this datasheet.

3. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (openssl.org), and cryptographic software written by Eric Young (ey@cryptsoft.com).

Weight

250 g (0.55 lb)

Box content

Camera, installation guide, Windows^R decoder 1-user license, lens tool

System tools

AXIS Site Designer, AXIS Device Manager, product selector, accessory selector, lens calculator
Available at axis.com

Languages

English, German, French, Spanish, Italian, Russian, Simplified Chinese, Japanese, Korean, Portuguese, Polish, Traditional Chinese, Dutch, Czech, Swedish, Finnish, Turkish, Thai, Vietnamese

Warranty

5-year warranty, see axis.com/warranty

Part numbers

Available at axis.com/products/axis-m3945-r#part-numbers

Optional accessories

Lens M12 2.4 mm, F2.1 IR: horizontal field of view 124°
Lens M12 2.8 mm, F2.0 IR: horizontal field of view 99°
Lens M12 3.6 mm, F2.0 IR: horizontal field of view 83°
Lens M12 6 mm, F2.0 IR: horizontal field of view 49°
Lens M12 8 mm, F1.6 IR: horizontal field of view 37°

Other

AXIS TP3826-E housing

AXIS TP3843 Dome Cover Clear

AXIS TP3844 Top Cover Black

For more accessories, go to axis.com/products/axis-m3945-r#compatible-products

Sustainability

Substance control

PVC free, BFR/CFR free in accordance with JEDEC/ECA Standard JS709

RoHS in accordance with EU RoHS Directive 2011/65/EU and 2015/863, and standard EN IEC 63000:2018

REACH in accordance with (EC) No 1907/2006. For SCIP UUID, see echa.europa.eu

Materials

Renewable carbon-based plastic content: 25%

Screened for conflict minerals in accordance with OECD guidelines

To read more about sustainability at Axis, go to axis.com/about-axis/sustainability

Environmental responsibility


axis.com/environmental-responsibility


Axis Communications is a signatory of the UN Global Compact, read more at unglobalcompact.org

Detect, Observe, Recognize, Identify (DORI)

AXIS M3945-R M12 2.8 mm AXIS M3945-R RJ45 2.8 mm	DORI definition	Distance
Detect	25 px/m (8 px/ft)	44.3 m (145 ft)
Observe	63 px/m (19 px/ft)	17.6 m (58 ft)
Recognize	125 px/m (38 px/ft)	8.8 m (29 ft)
Identify	250 px/m (76 px/ft)	4.4 m (14 ft)

AXIS M3945-R M12 3.6 mm AXIS M3945-R RJ45 3.6 mm	DORI definition	Distance
Detect	25 px/m (8 px/ft)	53.3 m (175 ft)
Observe	63 px/m (19 px/ft)	21.1 m (69 ft)
Recognize	125 px/m (38 px/ft)	10.6 m (35 ft)
Identify	250 px/m (76 px/ft)	5.3 m (17 ft)

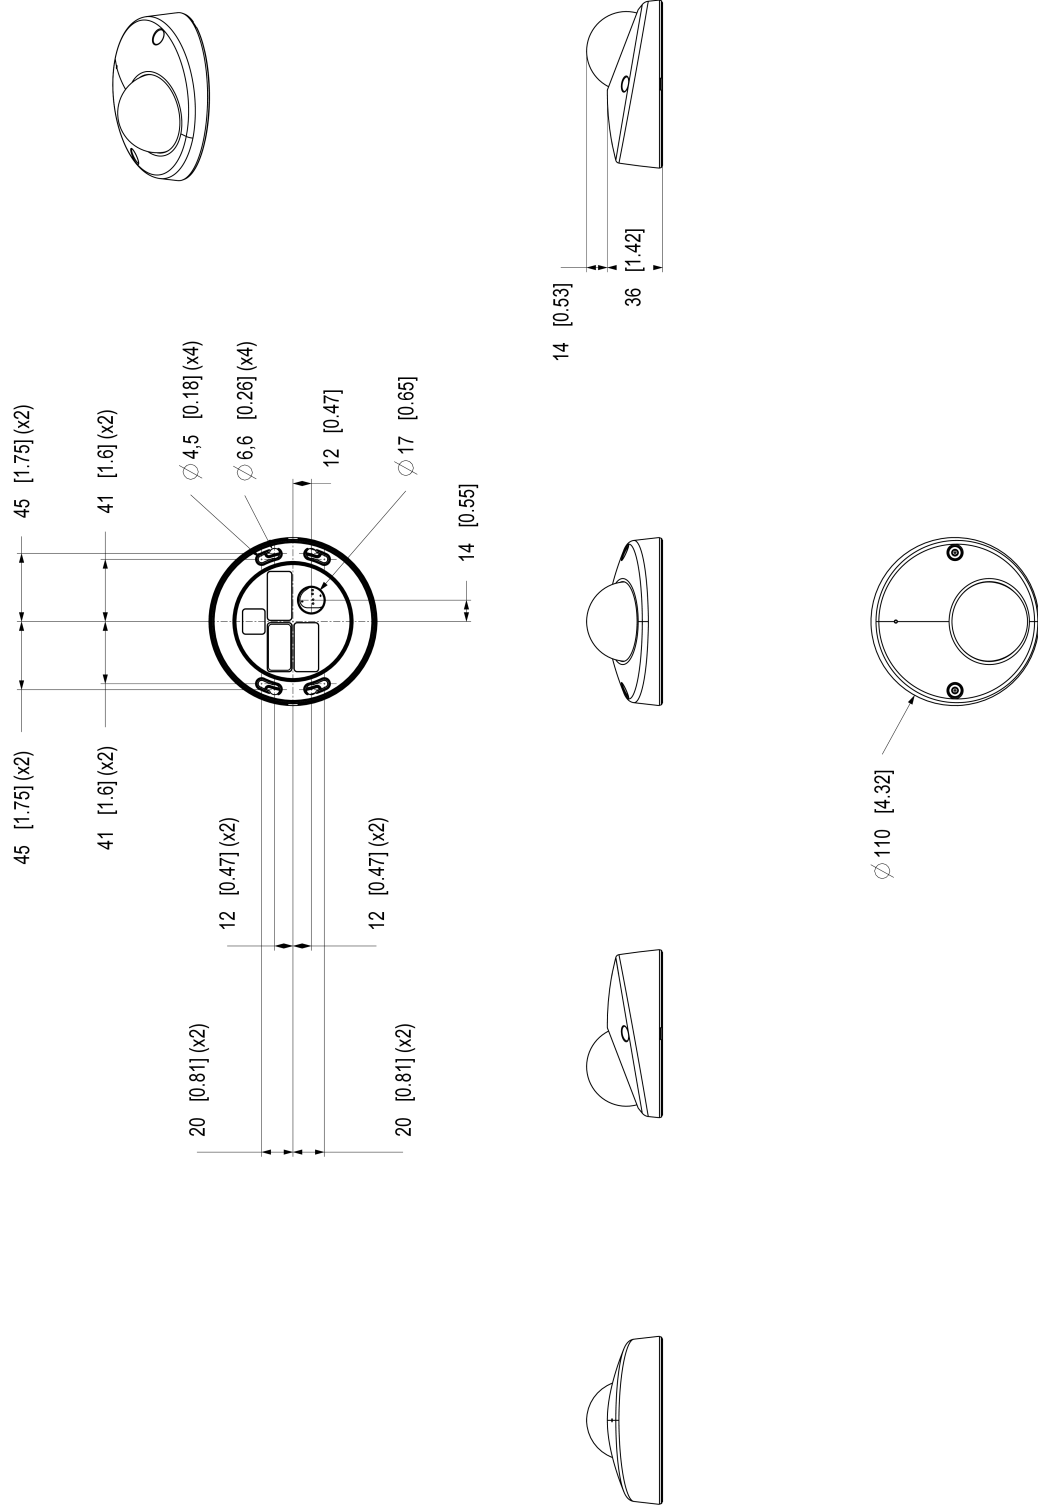

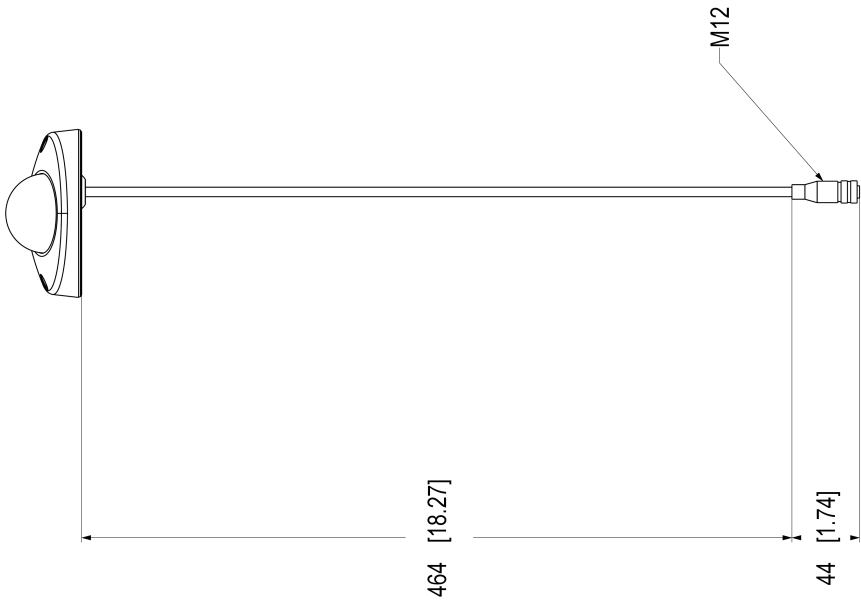



Highlighted capabilities

Axis Edge Vault

Axis Edge Vault is the hardware-based cybersecurity platform that safeguards the Axis device. It forms the foundation that all secure operations depend on and offer features to protect the device's identity, safeguard its integrity and protect sensitive information from unauthorized access. For instance, **secure boot** ensures that a device can boot only with **signed OS**, which prevents physical supply chain tampering. With signed OS, the device is also able to validate new device software before accepting to install it. And the **secure keystore** is the critical building-block for protecting cryptographic information used for secure communication (IEEE 802.1X, HTTPS, Axis device ID, access control keys etc.) against malicious extraction in the event of a security breach. The secure keystore and secure connections are provided through a Common Criteria or FIPS 140 certified hardware-based cryptographic computing module.

Furthermore, signed video ensures that video evidence can be verified as untampered. Each camera uses its unique video signing key, which is securely stored in the secure keystore, to add a signature into the video stream allowing video to be traced back to the Axis camera from where it originated.

To read more about Axis Edge Vault, go to axis.com/solutions/edge-vault.

Exchangeable lenses

Different lens options offer the opportunity to adjust the field of view (FoV) of the product, and thereby adapt it to your chosen area of use. The lens can be easily changed, for example to make the product cover wider areas, or to make it focus on details or objects of interest.

Rugged

Rugged is a term that for Axis modular and onboard products describes a device's endurance and stability in high vibration environments – over time. High vibration environments could be inside or close to machinery or inside vehicles. Rugged products from Axis are constructed to keep operating in these challenging conditions for the entire lifetime of the product.

For more information, see axis.com/glossary